


## LAYHER ALLROUND SCAFFOLDING® CATALOGUE 2023/2024




Edition 04.2023  
Ref. No. 8116.260

Quality management  
certified according  
to DIN EN ISO 9001

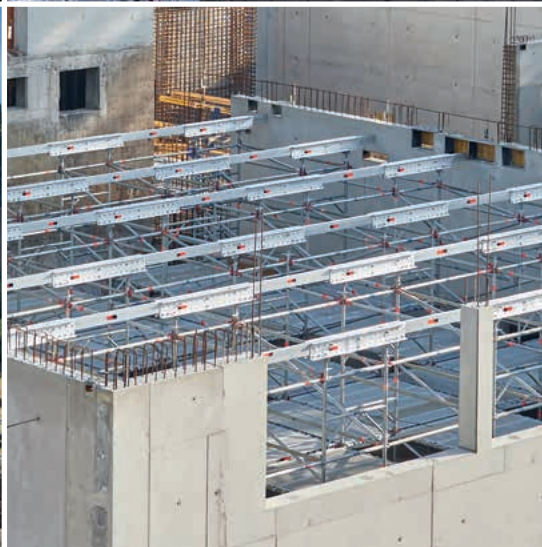



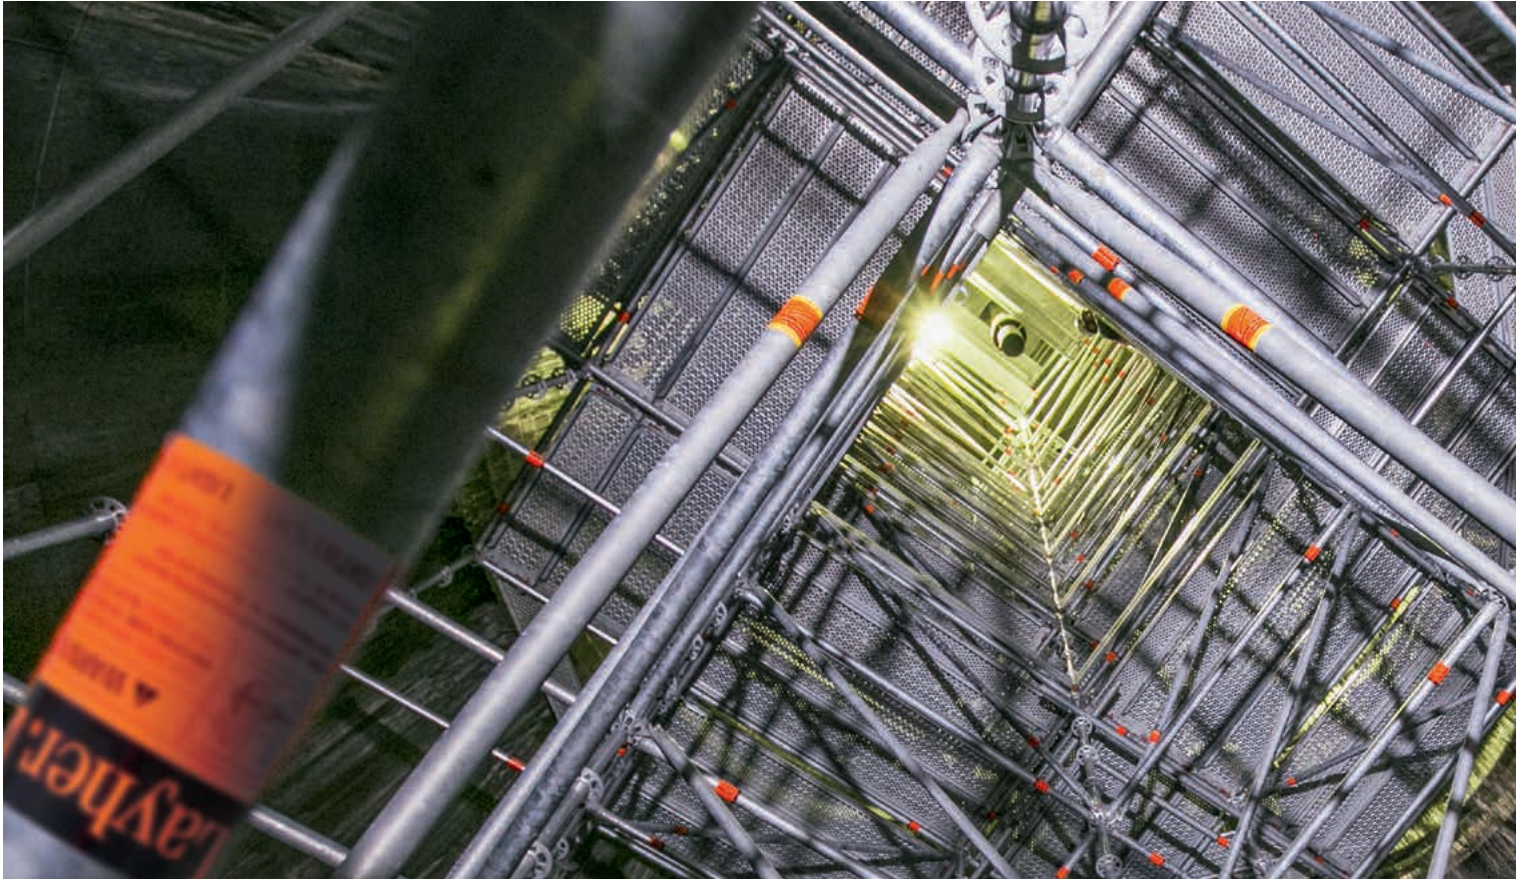

## COMPANY FROM PAGE 4




Quality "Made by Layher"	4
More Speed	5
More Safety	5
More Proximity	5
More Simplicity	5
More Future	5

## SCAFFOLDING PLANNING FROM PAGE 8



Software for scaffolding construction	8
---------------------------------------	---

## BASIC COMPONENTS FROM PAGE 10



Scaffolding base plates	10
Vertical support elements of steel and aluminium	12
Modular access system AGS	14
Horizontal support elements, side protection	16
Diagonal bracing	20
Scaffolding decks, U-suspension	22
Scaffolding decks, O-suspension	26
Steel plank, cover plates	28
Toe boards	30
Couplers, Spare Parts, accessories, anchoring	32





# MIXED REALITY



In this catalogue, you can find images highlighted with the symbol for mixed reality.

By using the Layher App, you bring these scaffolding structures to life. Learn more and download the app: **app-en.layher.com**

## EXTENSION COMPONENTS FROM PAGE 34



Brackets	34
Pedestrian protection, roof edge protection, scaffolding enclosure	36
Stairway ascents, outside accesses	38
FW System	48
Bridging system	50
FlexBeam	52
Allround Wall Bracket	54
TwixBeam	56
Shoring, construction stairtowers	60
Flat roof side protection	66
Advance guardrail system	66
Safetygear, Railing clamp, Ballasting	68
Mobile scaffolds, pallets, tools	70

## PRODUCT-PORTFOLIO



The Layher Product Range – all catalogues at a glance	
SpeedyScaf	Ref. No. 8102.264
Allround Scaffolding	Ref. No. 8116.260
System-free Accessories	Ref. No. 8103.281
Protective Systems	Ref. No. 8121.262
Event Systems	Ref. No. 8111.235
Access Technology	Ref. No. 8118.235

## NOTICE

Subject to technical modification. Component weights are subject to fluctuations due to tolerances and may therefore diverge from what is specified.

Steel components are hot-dip galvanized according to EN ISO 1461 and DASt guideline 022. Connection parts or other small pieces can be galvanized according to EN ISO 4042.

Our deliveries shall be made exclusively in accordance with our at the conclusion of contract valid General Terms of Sale. These include the following provisions: The place of performance is Gueglingen-Eibensbach. Title to the delivered goods shall be retained until full payment has been made. The fully GTC you can find here: **gtc.layher.com**

Please request the specific instructions for assembly and use when ordering. Protected by copyright. Not to be reproduced, either in whole or in part. Misprints and errors excepted.



# QUALITY MADE BY LAYHER



Headquarters in Eibensbach



Plant 2 in Gueglingen

## QUALITY MADE IN GERMANY.

Quality made by Layher comes from Gueglingen-Eibensbach. Our company has set down deep local roots since it was established. Right up until today, development, production and management, sales and export department are all in one place, where the conditions are best for achieving quality made by Layher: in Gueglingen-Eibensbach. The two locations together cover a surface area of 318,000 m<sup>2</sup>. This includes more than 148,000 m<sup>2</sup> of covered production and storage areas.

## MORE POSSIBILITIES. THE SCAFFOLDING SYSTEM.

This brand promise made by Layher is the expression of a brand philosophy that we've been living by for over 75 years. More speed, more safety, more proximity, more simplicity and more future: values with which we strengthen our customers' competitiveness in the long term. With our innovative systems and solutions, we're working all the time on making scaffolding construction even simpler, even more economical and, above all, even safer.

## SUSTAINABILITY AT LAYHER.

We've long been acting with a clear focus, with a view to both economic and ecological sustainability in all our process steps. Social responsibility towards employees, clients and society as a whole are at the very centre of this. We're a dependable employer, active in protecting our resources. The sparing use of work materials as a feature of our sustainable approach is fundamental to how we see ourselves: we already take care to ensure sustainable building methods when planning a new production facility, for example by greening the roofs or using photovoltaic systems. We also value locations that are close by, avoiding unnecessary CO<sub>2</sub> emissions due to long traffic routes. The topic of sustainability is firmly embedded in Layher's organisational structure thanks to its energy management team. Their work has paid off in particular in the form of DIN EN ISO 50001 certification.



Discover the world of Layher  
in its company film at:  
[yt-image-en.layher.com](http://yt-image-en.layher.com)









### MORE SPEED

High level of material availability, effective delivery service and quick assembly and dismantling of the scaffolding systems thanks to 100% fitting accuracy.

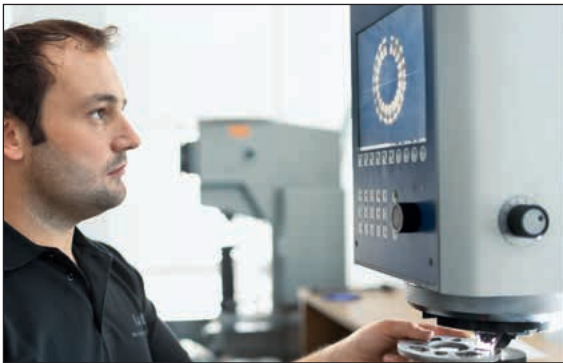

### MORE SAFETY

Outstanding quality and precision coupled with a long service life – confirmed internationally through independent certifications, inspections and approvals. Continuity and long-term partnership.

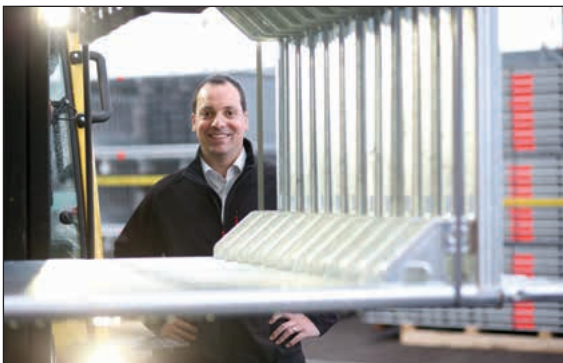

### MORE PROXIMITY

Comprehensive personal consultation and close-knit delivery network. Global presence through our own subsidiaries. Family-owned company that works closely with its customers.



### MORE SIMPLICITY

Economical scaffolding systems that have been proven in practice, available with an extensive product range. Cross-system combinations for versatile use. Rapid decision making thanks to efficient structures and processes.



### MORE FUTURE

Thanks to permanent product innovations and the improvement of existing parts. By opening up new areas of business. With an integrated system to ensure high profitability and retention of investment value. Through an extensive range of training opportunities and seminars to ensure that customers are always right up-to-date with the latest technical and commercial developments.

Layher Lightweight: Through the use of high-tensile steel, a new production process, and an improved design, we have succeeded in minimising the weight of the core components of our systems – while maintaining or raising load-bearing capacity.








### THE VERSATILE SOLUTION: LAYHER ALLROUND SCAFFOLDING®

The proven combination of positive and non-positive connections in rapid bolt-free system technology with AutoLock function permits connections that are automatically right-angled, obtuse-angled and acute-angled as required, with built-in safety at the same time. Layher Allround Scaffolding has become a synonym in the marketplace for modular scaffolding.

This original system has been continually improved since it was launched in 1974, and offers an impressive variety of uses: at every construction site, in industry, chemical plants, power stations, shipyards and for events. As scaffolding for working, protection, facades or for support, as internal or birdcage scaffolding, or as rolling towers.

Even with very difficult layouts and architecture styles and with heightened safety requirements, Allround Scaffolding is always the faster, safer and more economical solution.

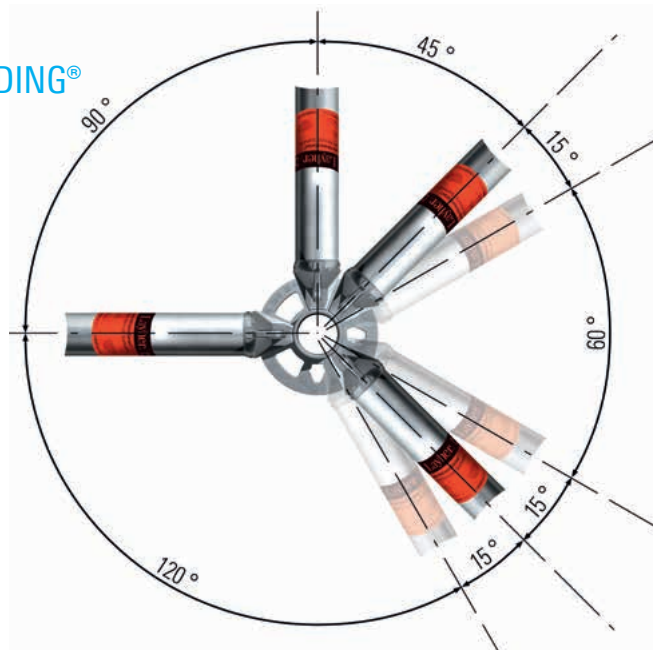

### THE BENEFITS FOR YOU


- ▶ Higher fitting performance and higher and more shipping space thanks to special high-tensile steel and constructive improvement, reducing weight of components and raising load-bearing capacity.
- ▶ No time-consuming fitting of spigots and double storage, thanks to a single standard with integrated spigot for supported and suspended scaffolding.
- ▶ The integrated scaffolding system for easy and complicated applications is fully combinable with all former generations. Maximum investment protection thanks to long durability, purchase availability for decades and continuous enhancements.
- ▶ Improved working safety and time saving on assembly thanks to the AutoLock function.
- ▶ Improved working thanks to the lower weight in the system and more headroom by approx. 10 cm.




As work scaffolding and safety scaffolding at the facade, as birdcage, trestle and suspended scaffolding, or as a rolling tower – the right scaffolding at all times and for every job and requirement. For very difficult ground plans and anchoring conditions, for very irregular structures, and for jobs with increased safety requirements.

**General building authority approval:** The various scaffolding systems of Layher Allround Scaffolding are approved with various general building authority approvals: Z-8.22-64 Layher Allround Steel, Z-8.22-64.1 Layher Alu-Allround, Z-8.22-939 Layher Allround LW, Z-8.22-949 Layher Allround LWv and Z-8.1-919 Layher Allround STAR 0.73 m wide and Z-8.1-969 Layher Allround STAR 1.09 m wide. Each of these general building authority approvals has its own approval object. The scaffolding components for use in each of the scaffolding systems are derived from the respective general building authority approval.

In addition, there is a type testing for the modular access system AGS for facades by the test authority of the German Building Authority. This includes different assembly variants with platform heights up to 24 meters.



**It's this easy:** Turning the ledger and slightly tilting it before assembly activates the AutoLock function.



As the wedge head is pushed over the rosette, the wedge drops automatically into the recess and is **immediately secured against any possibility of shifting or dropping out.**

This means: safe 1-man assembly, whatever the height.



The flat rosette without recesses or bulges prevents it getting clogged with the dirt, whatever the type, that makes assembly difficult.



A hammer blow on the wedge transforms the positive connection into a superbly strong non-positive one. (Use 500 g metal hammer until the blow bounces off).

## THE INTEGRATED SCAFFOLDING SYSTEM: APPLICATION-ORIENTED ACCESSORIES

### Protective Roofs

Layher weather protection roofs can be used in a number of variants depending on their span, the snow load or the wind load. That saves you real money when planning temporary weather protection roofs. For easy use on the site, clearly set-out material and loading capacity tables for snow and wind loads are available for you. Protective roofs are not a one-off solution for Layher, but a standard product – this ensures readiness for immediate delivery.



### Protect System

With its Protect System, Layher offers an enclosure system that fits in with Allround Scaffolding and SpeedyScaf. It is used for example for pedestrian protection in combination with the Allround bridging system and also for environmental protection and noise reduction. Highly economical to use thanks to quick and easy assembly in a simple and logical assembly sequence, and the frequent use of a few system components. The Layher Protect System is not a one-off solution for Layher, but a standard product – this ensures readiness for immediate delivery.



## ANTI-THEFT PROTECTION AND ADVERTISING IN ONE

### Layher Individual

Xtra-N-decks, Robust decks, Stalu decks, steel decks can be stamped individually. Wooden toe boards can be printed according to your preferences.



More interesting expansion parts, you can find in the brochure  
Expansion Parts in Industrial Scaffolding Construction.



## Software for scaffolding construction

### Layher LayPLAN

Time and material are crucial factors in scaffolding construction. To make the most efficient use of both, the Layher range includes the practical LayPLAN scaffolding planning software.

With the several software packages LayPLAN CLASSIC and LayPLAN CAD, it is possible to plan scaffolding structures from simple, small facade scaffolding up to complex industrial scaffolding or protective roofs and grandstands.

### LayPLAN CLASSIC


With the LayPLAN CLASSIC modules for Allround Scaffolding and SpeedyScaf, individualised scaffolding solutions can be configured quickly and easily: whether they're for circular or facade scaffolding made from SpeedyScaf, for birdcage scaffolding and free-standing towers made from Allround Scaffolding, or for structures with temporary roofs. Once the dimensions and the required assembly variant have been entered, LayPLAN CLASSIC delivers within seconds a scaffolding proposal, including anchoring, bracing and side protection. During the design phase, the overall length, standing heights and areas are continuously calculated and displayed to reflect the current plan. A material list can also be created at the click of a button and then printed out, together with an assembly sketch for the area to be enclosed in scaffolding plus the total weight. This also helps with the logistics – the required material is guaranteed to be there where it's needed. Scaffolding erectors benefit from more certainty when planning the commercial and technical details, from optimised use of stocks, and from full cost transparency at every stage of the project.

After finalisation of the scaffolding proposal, the LayPLAN Material Manager provides you with complete lists of required parts to ensure you always have precisely the material you need at the site.


### LayPLAN CAD

For more complex structures, LayPLAN CAD is available. This is a plug-in for Autodesk AutoCAD. It enables 3-dimensional planning of scaffolding structures of all types.


Thanks to integration into the LayPLAN system, the basic planning can be handled in automated form using the proven LayPLAN CLASSIC. Project data can be quickly recorded using input masks, ensuring a time saving for every order. The data are then simply exported into the AutoCAD program, which offers further possibilities for detailed 3D planning. A visual collision check is possible with the aid of volume rendering. Using a convenient search function with preview image, scaffolding planners will find not only an extensive library of individual Layher parts, but also assemblies already prefabricated for even faster design work. The detailed drawings can then be printed out. A transfer to visualisation or animation software is also possible without any problem. This allows projects not only to be planned economically and also adapted precisely to actual requirements, but also to be presented professionally to customers.

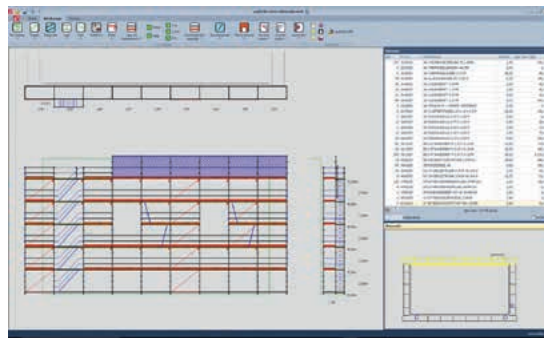


Allround Facade Scaffolding

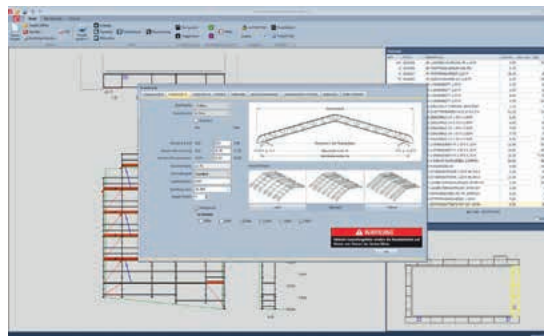

Weather protection roof on Allround support Scaffolding

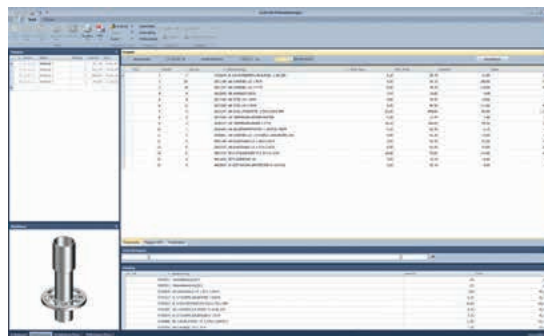


Component images LayPLAN Material Manager  
Part of LayPLAN CLASSIC and LayPLAN CAD

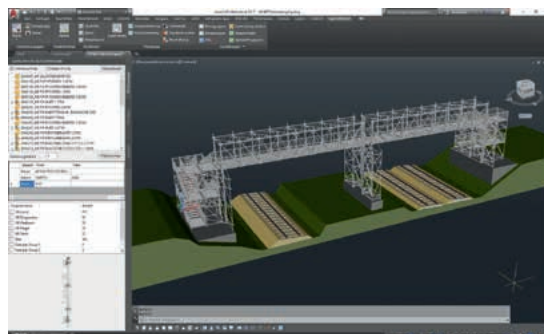


Planning of individualised scaffolding structures in LayPLAN CAD




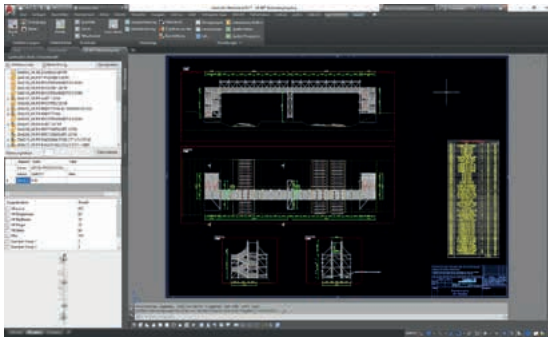

**Creation of planning documents with integral material lists in LayPLAN CAD**

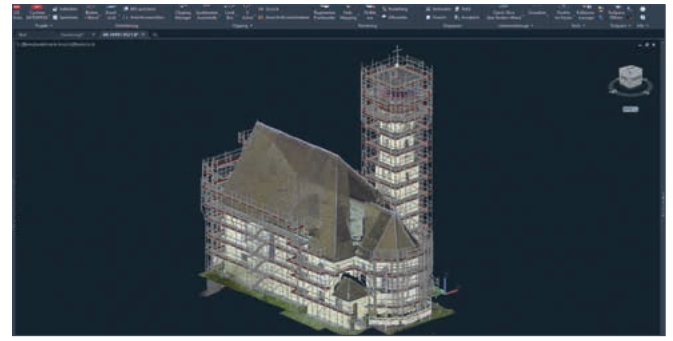

**Scanning result with integrated scaffolding planning in LayPLAN CAD**

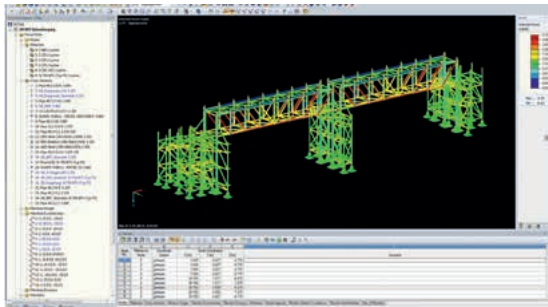

**Structural strength computations based on definition of nodal supports and loads**



#### Layher LayPLAN to RSTAB

For structural strength verification of scaffolding structures, frame analysis programs are generally used. Using the LayPLAN TO RSTAB module, all modelling-relevant information about an Allround Scaffolding structure is imported three-dimensionally into the RSTAB frame analysis program from Dlubal. Automated transmission of the information means that re-entering the model data is not needed. This means that the user will benefit from an enormous time saving as well as avoid a possible source of errors during modelling.

#### How can I acquire LayPLAN?

Registration and all the ordering processes can be conveniently accessed at the Layher website: <http://software.layher.com>

A contact form gives you the data to access our software portal, where you can download a 30-day test version and also find the order form for the full version.

Pos.	Description	Dimensiones L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No..
1	<b>LayPLAN CLASSIC</b> Single licence – scaffolding configurator for SpeedyScaf, Allround Scaffolding, weather protection roofs and rolling towers				6345.102
2	<b>LayPLAN CAD</b> Single licence – plug-in for AutoCAD, for designing complex scaffolding in 3D and for developing scaffolding proposals from LayPLAN CLASSIC				6345.103
3	<b>LayPLAN TO RSTAB</b> To use LayPLAN TO RSTAB, only RSTAB 8 from Dlubal including the RS-COM interface is required. RSTAB 9 is not supported.				6345.104

<sup>2</sup> Monatliche Nutzungsgebühr. Die Mindestvertragslaufzeit beträgt 12 Monate und verlängert sich automatisch um weitere 12 Monate, sofern nicht zuvor mit einer Frist von 3 Monaten gekündigt wurde. Gebühr ist nicht rabattfähig.

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layher Individual possible

= new in the catalogue



## Scaffolding base plates

For load transmission and ground adaption, choose different height-adjustable **base plates 2–5** with sturdy and self-cleaning round threads, with colour and notch markings to provide protection against overwinding. Make sure that there are sufficient load-distributing surfaces. For all inclined erection surfaces, e.g. in combustion chambers or ship hulls, **swivelling base plates 60**, reinforced **4** are used.

The round threads of all Layher scaffolding spindles have an outside diameter of 38 mm and a pitch of 8.1 mm. The wing external dimension of the spindle nut is 205 mm. The dimensions of the foot plate are 150 x 150 mm.

### Load capabilities of spindle cross-section as per DIN EN 12811-1

Spindle type	$N_{Rd}$ [kN]	$M_{Rd}$ [kNm]	$V_{Rd}$ [kN]
normal	97.7	83.0	36.0
reinforced	119.9	94.5	44.1
solid	288.0	157.0	106.0

The **head jack 7/8** and **10/11** accommodates wood sections or steel beams and serves to adjust height and introduce loads. The solid head jacks and base plates can be recognized by the hexagonal opening provided in them.


The **swivelling head jack 45**, solid **10** can be used to install supports (e.g. wood sections) with an inclination of up to max. 5% to the horizontal in the longitudinal and transversal directions, thus eliminating the need to level with a wedge. Greater loads can be supported thanks to the articulated mounting of the top plate and the resulting centric introduction of vertical forces into the spindles.

The **cross head jack 45**, solid **11** serves to accommodate wood sections, glued binders or steel beams in falsework and supporting scaffolding. It stabilizes the supports against tilting, and it is possible to use one or two formwork supports. Height adjustment is performed using the spindle nut. The cross head jack is suitable for all common formwork supports.

### Wedge spindle swivel coupler 12


For connection of a tube  $d=48.3$  mm to a scaffolding spindle at any angle.

With the **adjustment plate 13**, rigid base plates can be fully beared on inclined ground. By turning the plate, the inclination can be continuously adjusted up to 16% without reducing the load-bearing capacity.

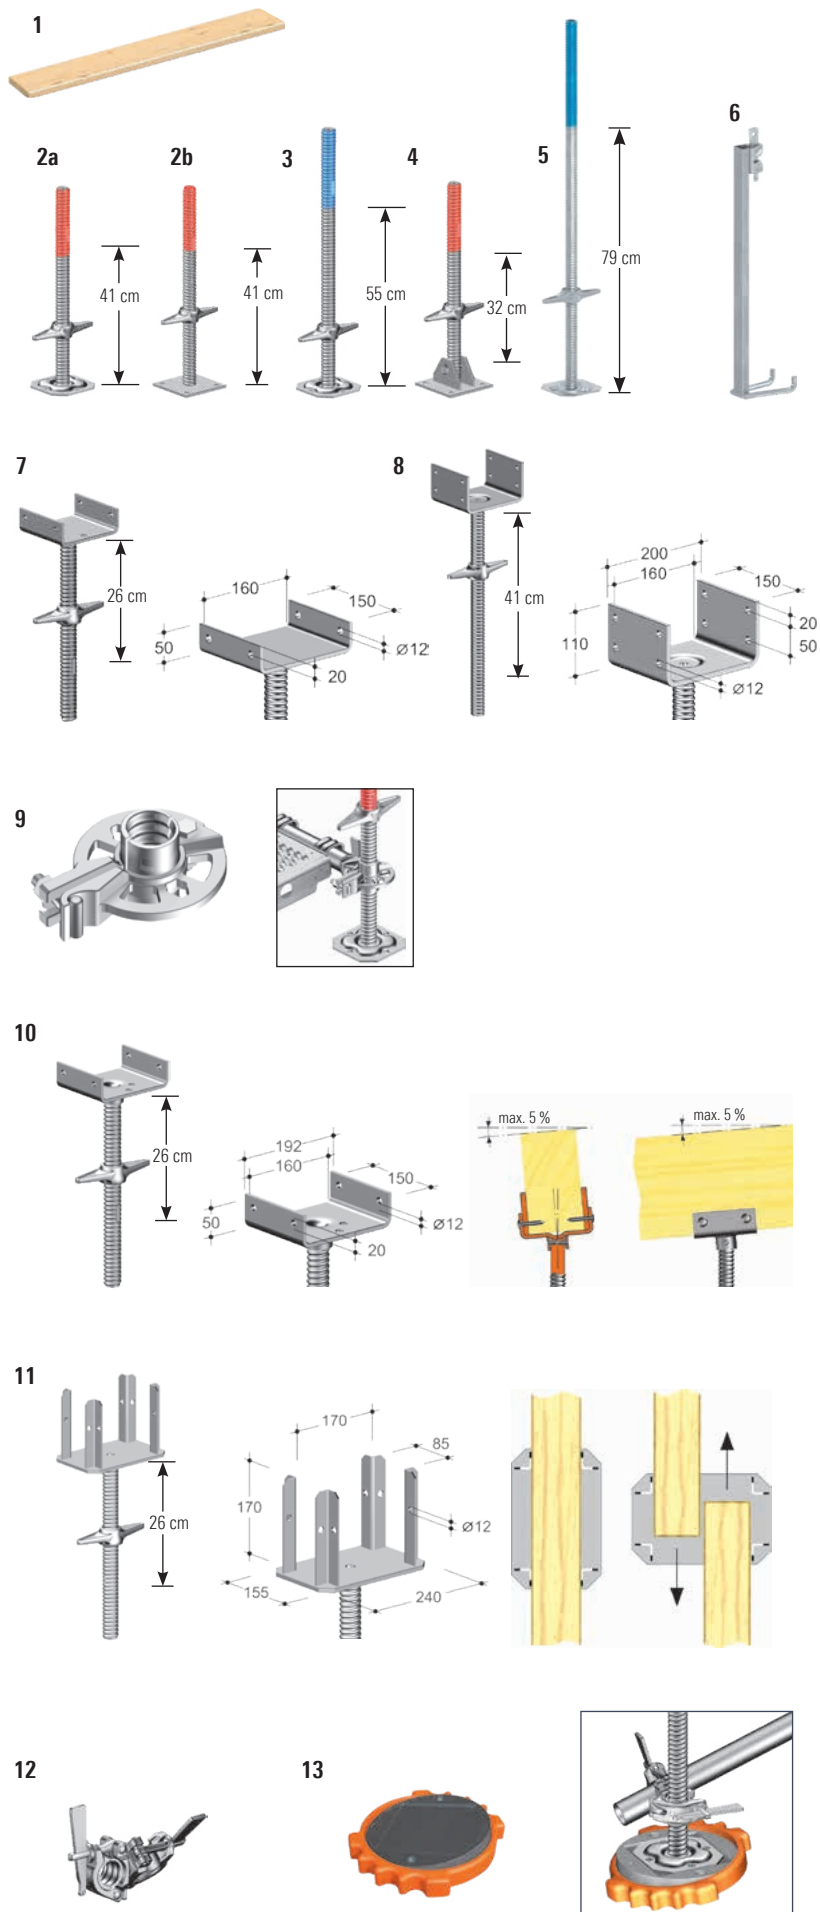





Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Scaffolding plank</b> 45 mm high, freshly sawn, sorting category S 10		1.00 x 0.24	5.20	80	<b>3816.100</b>	🕒
			1.50 x 0.24	7.80	80	<b>3816.150</b>	🕒
2	<b>Base plate 60</b> (max. spindle travel 41 cm) solid, without lock (max. spindle travel 41 cm)		0.56	3.60	200	<b>4001.060</b>	
			0.58	6.70	200	<b>5602.060</b>	📦
3	<b>Base plate 80</b> reinforced (max. spindle travel 55 cm)		0.73	4.90	200	<b>4002.080</b>	
4	<b>Swivelling base plate 60</b> reinforced (max. spindle travel 32 cm), ensure sufficient structural strength		0.58	6.10	250	<b>4003.000</b>	
5	<b>Base plate 110</b> <sup>new</sup> reinforced (max. spindle travel 79 cm)		1.10	6.47	100	<b>4002.110</b>	📦
6	<b>Spindle attachment</b> with wedge head		0.60	2.00	150	<b>2602.100</b>	📦
7	<b>Head jack 45</b> reinforced (max. spindle travel 26 cm), width of fork 16 cm		0.45	6.60	100	<b>5314.045</b>	📦
8	<b>Head jack 60</b> reinforced (max. spindle travel 41 cm), width of fork 16 cm		0.60	8.00	100	<b>5316.060</b>	📦
9	<b>Rosette with thread</b> clampable	19	0.12	1.70	250	<b>2602.119</b>	📦
		22	0.12	1.70	250	<b>2602.122</b>	📦
10	<b>Swivelling head jack 45</b> solid (max. spindle travel 26 cm), width of fork 16 cm		0.45	7.30	100	<b>5312.045</b>	📦
11	<b>Cross head jack 45</b> solid (max. spindle travel 26 cm), opening dimensions 8.5 / 17 cm		0.45	6.90	90	<b>5315.045</b>	📦
12	<b>Wedge spindle swivel coupler</b>			1.82	25	<b>4735.000</b>	📦
13	<b>Adjustment plate for base plate</b> of glass-fibre-reinforced polyamide plastic, inclination 0 – 16%		d=0.30	1.25	250	<b>4000.400</b>	📦

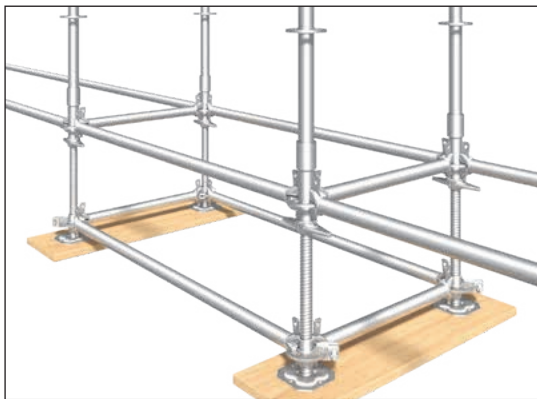

The **rosette with thread**, clampable **9** can be attached to the thread of the Layher base plate or head jack. This rosette can be used, when the spindle nut is undone, for bracing in the longitudinal, transverse and diagonal directions. Up to six connections are possible.

The **spindle attachment with wedge head** **6** serves to secure the base plate and the base collar against falling out when moving scaffolding with a crane.

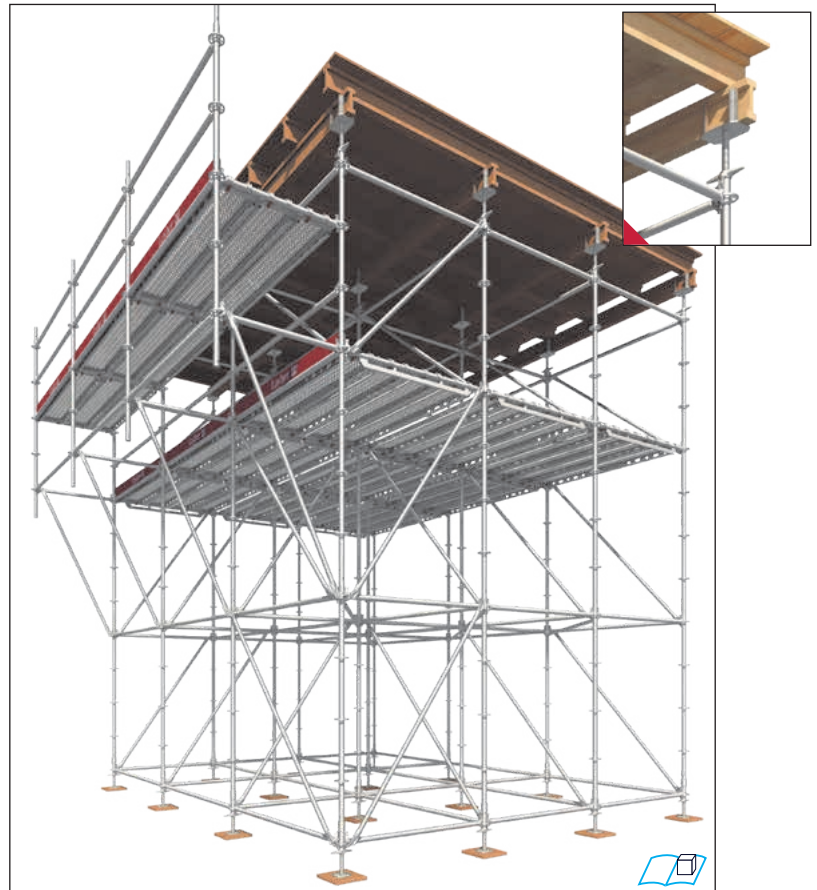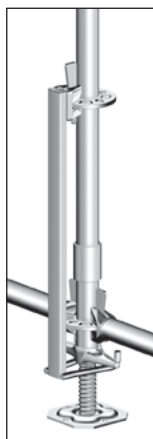



## Vertical support elements of steel and aluminium

**Standards** are available in hot-dip galvanized steel tubing,  $d=48.3$  mm, and aluminium tubing,  $d=48.3$  mm, with rosettes at every 50 cm for a maximum of eight connections. Four small openings in the rosette determine right-angled connections, four larger openings permit connections at any angles.



For use as suspended scaffolding or for moving by crane, only following standards may be used: **standards** without spigot **1b+c** together with **spigots 4+5**, **standards 3d** together with **spigots 2** or **standards LW 1a** with integrated spigot.




For connecting of each standard, you can use **hinged pins 6** or **special bolts M12 x 60 7**. The spigots should always be bolted into the standard with the special bolts.

**The standard LW, steel, with integrated spigot 1a – only one standard for stand or suspended scaffolding structures. Thanks to the transmission of tension load no different standards are necessary.**

**The rosette, clampable 8**, can be connected to any point on the standard – tightening torque 50 Nm – and allows up to six ledgers or diagonal braces to be connected to it. This permits flexible solutions between the rosettes even when connected to SpeedyScaf. Loading table available on request.

**The base collar 10**, with rosette and the height-adjustable base plate form the scaffolding base. The vertical standard is placed into the base collar for further construction. **The base collar, long 10**, is required with aluminium Allround standards. For Allround rolling towers it facilitates a correct securing of the castors with locks against falling out.

**The standard lock, 0.50 m 9** can be used to bridge standard joints, for example when moving scaffolding using a crane or for suspended scaffolding. Permissible load capacity: 18.8 kN.

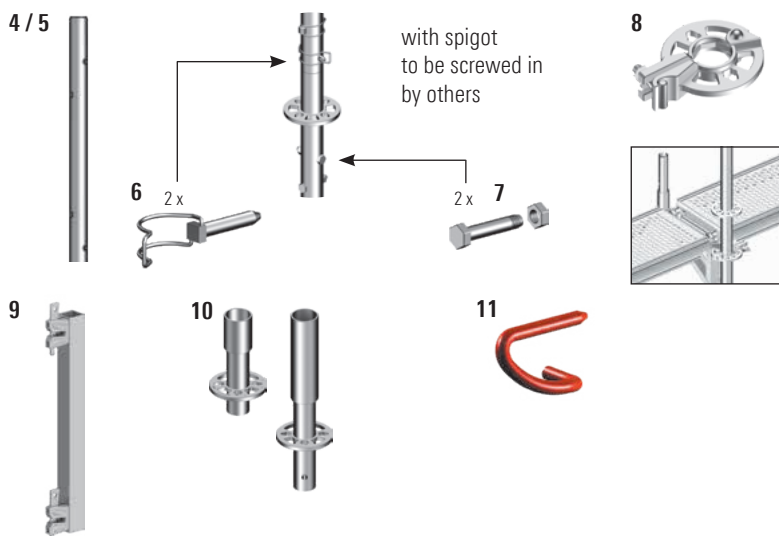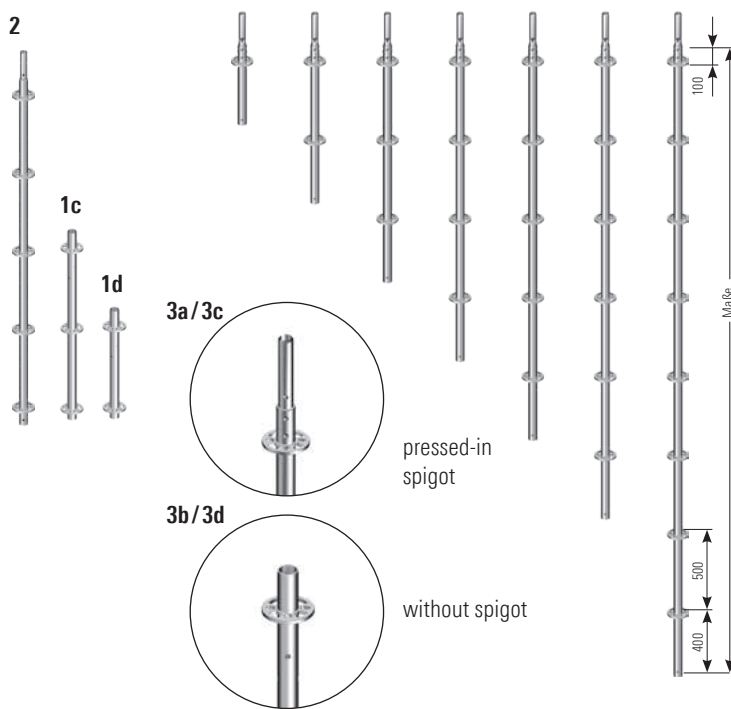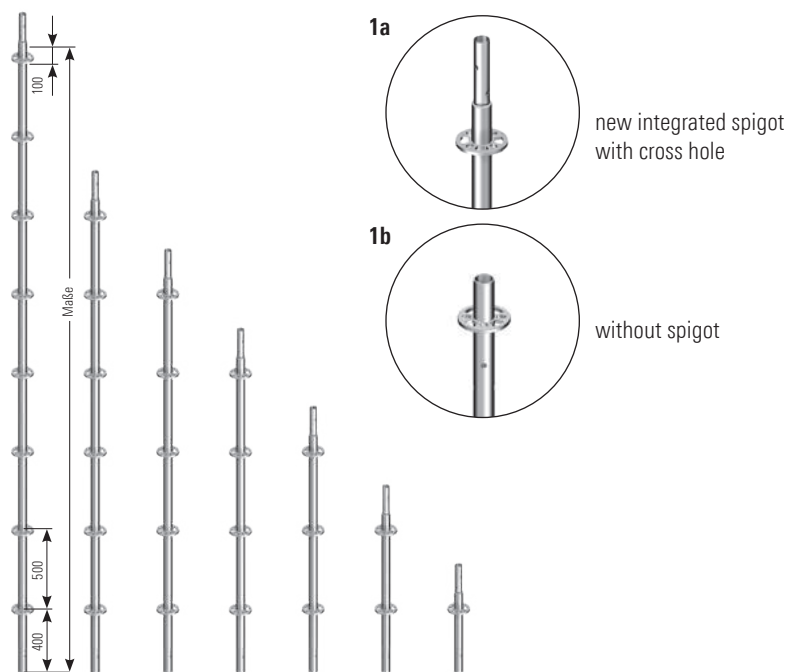

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Standard LW</b>						
	a) steel, with integrally shaped spigot with cross hole, for use in stand and suspended scaffolding			0.50	2.70	240	2617.050
				1.00	4.90	28	2617.100
				1.50	7.10	28	2617.150
				2.00	9.30	28	2617.200
				2.50	11.50	28	2617.250
				3.00	13.70	28	2617.300
				4.00	18.10	28	2617.400
	b) steel, without spigot, for scaffolding layer			1.16	5.75	28	2617.116
				0.50	2.20	300	2619.050
				1.00	4.40	28	2619.100
				1.50	6.60	28	2619.150
				2.00	8.80	28	2619.200
				2.50	11.00	28	2619.250
	c) 1.16 m, with 3 rosettes, without spigot with integrated base collar			3.00	13.20	28	2619.300
d) 0.67 m, with 2 rosettes, without spigot with integrated base collar			1.16	5.47	28	2619.116	
0.67			0.67	3.27	200	2619.066	
2	<b>Initial standard LW</b> steel, with integrally shaped spigot, for use in the lowest scaffolding level, without base collar or for assembly of the modular stairtower, with 5 rosettes			2.21	10.00	28	2617.221
3	<b>Standard</b>						
	a) steel, with pressed-in spigot			0.50	3.20	240	5603.050
				1.00	5.52	28	2603.100
				1.50	7.76	28	2603.150
				2.00	10.10	28	2603.200
				2.50	12.40	28	2603.250
				3.00	14.64	28	2603.300
				4.00	19.20	28	2603.400
	b) steel, without spigot e.g. for receiving head jacks, or for suspended scaffolding use the spigot Ref. No. 2605.000			0.50	2.50	300	2604.050
				1.00	4.60	28	2604.100
				1.50	6.82	28	2604.150
				2.00	8.96	28	2604.200
				2.50	11.70	28	2604.250
				3.00	13.71	28	2604.300
				3.00	13.71	28	2604.300
	c) aluminium, with pressed-in spigot			1.00	2.20	28	3200.100
				1.50	3.20	28	3200.150
				2.00	4.10	28	3200.200
				2.50	5.00	28	3200.250
				3.00	5.90	28	3200.300
	d) aluminium, without spigot, for suspended scaffolding			1.00	1.90	28	3209.100
			1.50	2.80	28	3209.150	
			2.00	3.80	28	3209.200	
			2.50	4.70	28	3209.250	
			3.00	5.60	28	3209.300	
4	<b>Spigot, steel</b> for standards Ref. No. 2619.xxx and 2604.xxx			0.52	1.60	350	2605.000
5	<b>Spigot, aluminium</b> for Ref. No. 3209.xxx			0.52	0.80	250	3209.000
6	<b>Hinged pin</b> d=12 mm, with pan-head				1.60	20	4905.668
7	<b>Special bolt M12 x 60</b> with nut		19		4.00	50	4905.062
8	<b>Rosette</b> clampable		19	0.12	1.14	450	2602.019
			22	0.12	1.19	450	2602.022
9	<b>Standard lock</b> 0.50 m			0.58	4.00	100	2603.000
10	<b>Base collar</b>			0.24	1.41	500	2602.000
	long			0.43	2.20	400	2660.000
11	<b>Locking pin</b> red, d=11 mm				0.15	100	4000.001

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible  
 = new in the catalogue



# Modular access system AGS for facades


For **advancing side protection without additional work steps**, Layher has designed the modular access system AGS for facades. Using the **AGS standard LW 1** and the **AGS Guardrails 5**, you can create facade scaffolding using Allround Scaffolding with two-part advancing side protection – on both the inside and the outside – without the use of temporary side protection parts.

Thanks to the innovative guardrail suspension, the AGS Guardrails can be fitted from the secured level underneath, and then swung upwards together with the AGS Standard.




During assembly or dismantling, **no assembly direction** for the scaffolding bays has to be adhered to. The AGS Standard has the same load-bearing properties as a normal 2.00 m long Allround Standard LW. Bracing components such as longitudinal ledgers or diagonal braces can be fitted in the familiar way to the Allround rosettes. That keeps you independent and able to deal flexibly with requirements arising at the site.


## The isotropy assembly principle Assembly variant 1: Outside AGS, Inside Allround Scaffolding

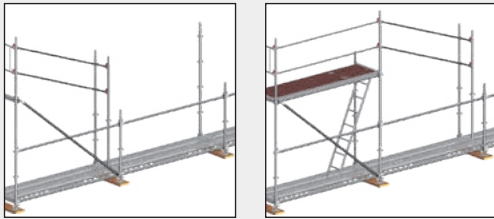


## The isotropy assembly principle Assembly variant 2: Outside and inside AGS

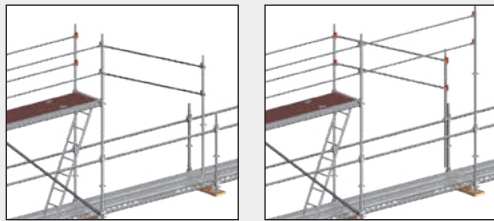

The **AGS eaves bracket 11** fulfils the work requirements for painters, plasterers and roofers. It replaces material- and time-consuming structures.

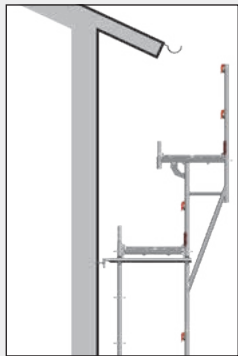

The **telescopic AGS guardrail 12** allows closing of adjustment bays in inner corners with system guardrails.

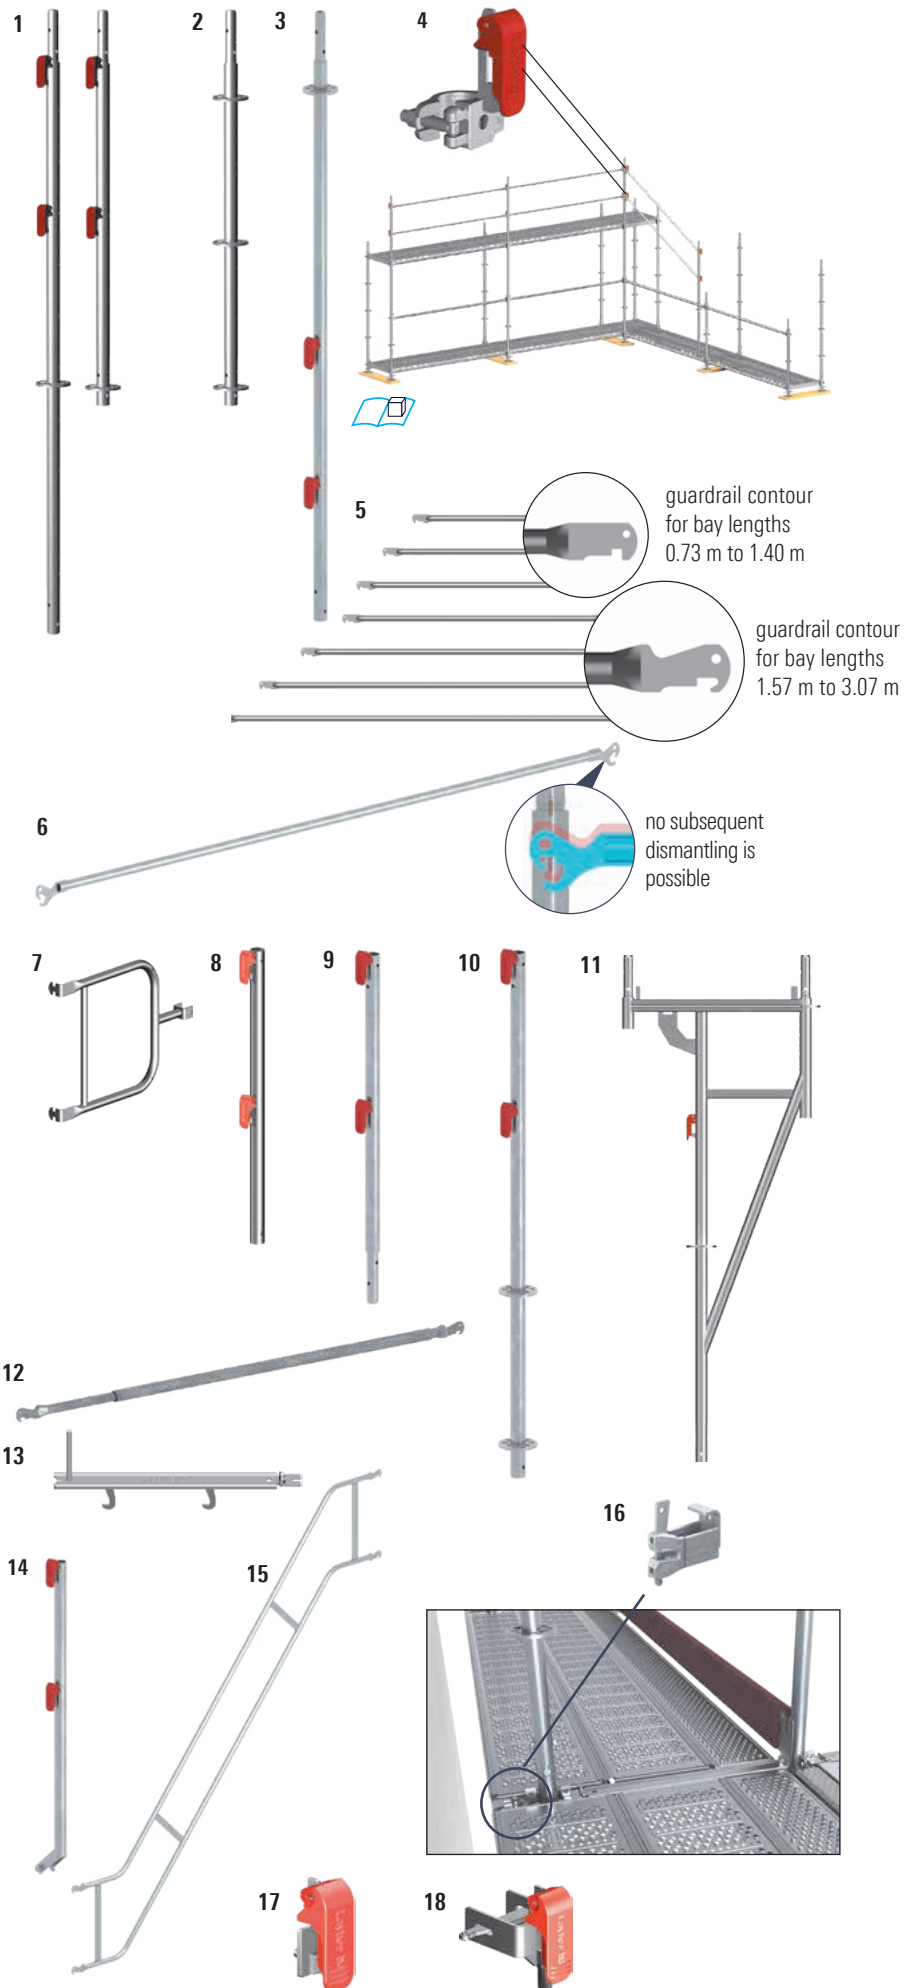

Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>AGS standard LW</b> normal standard for assembly with advanced side protection		2.00	8.00	28	<b>2602.065</b>	
	with integrated spigot, with 1 rosette and 2 AGS safety levers for quick scaffolding base assembly without base collar – suitable if a full stiffening with Allround ledgers on 1 m height is not necessary e.g. for low scaffolding heights		1.16	5.38	28	<b>2602.116</b>	
2	<b>Standard LW</b> with integrally shaped spigot, with cross hole, for use in stand and suspended scaffolding		1.16	5.75	28	<b>2617.116</b>	
3	<b>AGS interior standard</b> advanced guardrail assembly not possible, only for use at inner scaffolding side		2.00	8.00	28	<b>2602.075</b>	
4	<b>AGS guardrail adapter</b> with half-coupler, for further construction with guardrails in inner or outer corners			1.00	500	<b>2602.021</b>	
5	<b>AGS guardrail</b> lightweight guardrail made of 33.7 mm tube, assembly without tools ensures rapid installation and removal		0.73	1.40	140	<b>2602.005</b>	
			1.09	2.00	140	<b>2602.006</b>	
			1.40	2.60	140	<b>2602.007</b>	
			1.57	2.90	140	<b>2602.061</b>	
			2.07	3.70	140	<b>2602.062</b>	
			2.57	4.50	140	<b>2602.063</b>	
			3.07	5.50	140	<b>2602.064</b>	
6	<b>AGS guardrail Fixx</b> assembly only from secured level. Lightweight guardrail from d=33.7 mm tube; tool-free assembly guarantees a quick handling; subsequent dismantling not possible		1.57	3.10	140	<b>2602.067</b>	
			2.07	4.00	140	<b>2602.068</b>	
			2.57	4.90	140	<b>2602.069</b>	
			3.07	5.80	140	<b>2602.070</b>	
7	<b>AGS double end guardrail</b> closure of the scaffolding at its end		0.73	4.30	60	<b>2602.014</b>	
			1.09	5.60	50	<b>2602.018</b>	
8	<b>AGS guardrail support</b> top scaffolding closure		1.00	4.70	50	<b>2602.013</b>	
9	<b>AGS guardrail standard LW</b>		1.00	4.20	50	<b>2602.027</b>	
10	<b>AGS standard LW for roof edge protection</b> for safe and advanced assembly of an AGS roof edge protection		1.71	7.00	28	<b>2602.028</b>	
11	<b>AGS eaves bracket</b>		2.00 x 0.73	18.70	50	<b>2602.066</b>	
12	<b>Telescopic AGS guardrail</b> lightweight, telescopic guardrail for equalizing bays and inner corners		1.09 – 1.57	4.40	50	<b>2602.024</b>	
			1.57 – 2.57	6.50	50	<b>2602.025</b>	
13	<b>U-lift-off-preventer with toe board pin</b> for use of SpeedyScaf toe boards instead of standard Allround toe boards		0.73	1.40	260	<b>2627.008</b>	
			1.09	1.90	100	<b>2627.009</b>	
14	<b>AGS stair guardrail post</b>		1.20	4.60	50	<b>2602.076</b>	
15	<b>AGS stair guardrail</b>		2.57 x 1.50	15.00	30	<b>2602.077</b>	
			2.57 x 2.00	15.80	30	<b>2602.078</b>	
			3.07 x 2.00	17.60	30	<b>2602.079</b>	
16	<b>U-ledger bracket with 1 wedge head</b> for widening the working space between scaffolding and wall		0.14	1.00	500	<b>2618.014</b>	
17	<b>Internal guardrail holder</b> quick and tool-free assembly by swivelling in of the lever, for connection of internal guardrails			0.25	500	<b>2602.012</b>	
18	<b>Guardrail adapter</b> for lateral connection of AGS and Allround Scaffolding			0.64	500	<b>2602.016</b>	



More information about the AGS,  
you can find in the product film:  
[yt-ags-en.layher.com](http://yt-ags-en.layher.com)



WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layher Individual possible

= new in the catalogue



## Horizontal support elements, side protection

Depending on the scaffolding bay length, deck type and load, **ledgers** made of steel or aluminium are available in cylindrical tube, U-section and reinforcement sections for higher loads. The ledgers are deck beams, bracing elements and guardrails.


The wedge lock connection ensures positive and non-positive connection with central load introduction between standards and ledgers. Safety is already assured in the assembly state because the wedge lock already prevents unintentional disengagement when the wedge is loosely inserted. Longitudinal ledgers can be omitted at deck level if the decks are secured against lifting off by a lift-off preventer.

Load capacity of O-ledger, steel*							
Ledger length (system dimension) [m]	0.73	1.09	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load q [kN/m]	29.2	14.1	8.8	7.0	4.1	2.7	1.9
Individual load P in centre of bay [kN]	10.1	7.1	5.7	5.1	4.0	3.3	2.7


\* Working load

### O-ledger LW 1/2

The new **wedge head design with AutoLock function** means greater construction safety. By turning the ledger the function gets activated and the wedge descends into rosette slot automatically. Thanks to the reduction of the wall thickness **there is a weight saving of 12%**. That leads to less strenuous working conditions. Additionally the **bending strength got increased about 24%**.

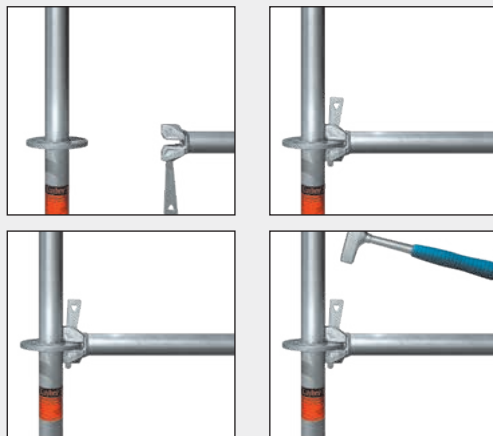


Slide the wedge head over the rosette.



Thanks to the AutoLock-function, the wedge automatically falls into the rosette. The component is secured against shifting and falling out.



Hammer down the wedge to provide a non-positive connection. (Use 500 g metal hammer until the blow bounces off.)

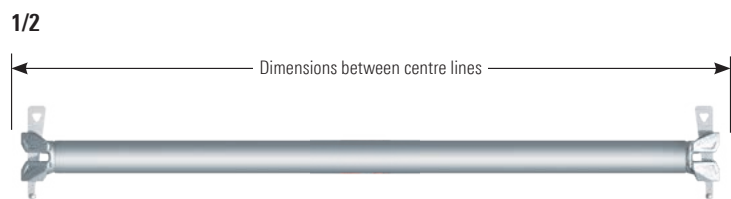

Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>O-ledger LW</b> steel, with AutoLock function						
			0.39	1.90	250	<b>2601.039</b>	
			0.45	2.10	250	<b>2601.045</b>	
			0.73	2.90	400	<b>2601.073</b>	
			0.86	3.30	50	<b>2601.086</b>	
			0.90	3.40	50	<b>2601.090</b>	
			1.04	3.80	50	<b>2601.103</b>	
			1.09	4.00	50	<b>2601.109</b>	
			1.29	4.60	50	<b>2601.129</b>	
			1.40	5.00	50	<b>2601.140</b>	
		1.57	5.50	50	<b>2601.157</b>		
		2.07	7.00	50	<b>2601.207</b>		
		2.57	8.50	50	<b>2601.257</b>		
		3.07	10.10	50	<b>2601.307</b>		
		4.14	13.40	50	<b>2601.414</b>		
		steel, metric, with AutoLock function	0.25	1.40	300	<b>2601.025</b>	
			0.50	2.20	250	<b>2601.050</b>	
			1.00	3.70	50	<b>2601.100</b>	
			1.50	5.30	50	<b>2601.150</b>	
			2.00	6.80	50	<b>2601.200</b>	
	2.5		8.30	50	<b>2601.250</b>		
		3.00	9.90	50	<b>2601.300</b>		
2	<b>O-ledger</b> aluminium		0.73	2.80	400	<b>3201.073</b>	
			1.09	2.84	50	<b>3201.109</b>	
			1.40	3.70	50	<b>3201.140</b>	
			1.57	4.00	50	<b>3201.157</b>	
			2.07	4.50	50	<b>3201.207</b>	
			2.57	4.90	50	<b>3201.257</b>	
			3.07	5.50	50	<b>3201.307</b>	
3	<b>Scaffolding tube</b> steel, hot-dip galvanized Scaffolding tubes 48.3 x 4.0 mm, as per DIN EN 39		0.50	2.30	250	<b>4600.050</b>	
			1.00	4.50	61	<b>4600.100</b>	
			1.50	6.80	61	<b>4600.150</b>	
			2.00	9.00	61	<b>4600.200</b>	
			2.50	11.30	61	<b>4600.250</b>	
			3.00	13.50	61	<b>4600.300</b>	
			3.50	15.80	61	<b>4600.350</b>	
			4.00	18.10	61	<b>4600.400</b>	
			5.00	22.70	61	<b>4600.500</b>	
			6.00	27.30	61	<b>4600.600</b>	
4	<b>U-ledger LW T14</b> steel		0.45	2.10	250	<b>2618.045</b>	
			0.50	2.50	250	<b>2618.050</b>	
			0.73	3.06	400	<b>2618.073</b>	
			1.00	4.10	50	<b>2618.100</b>	
			1.04	4.20	50	<b>2618.103</b>	
			1.09	4.30	50	<b>2618.109</b>	
			1.29	5.20	50	<b>2618.129</b>	
			1.40	5.40	50	<b>2618.139</b>	
5	<b>U-ledger</b> aluminium		0.73	1.50	400	<b>3203.073</b>	



# Horizontal support elements, side protection

## U-ledger deck configuration

Bay width   Deck width	0.19 m			0.32 m			0.50 m			0.61 m		
Version	A	B	C	A	B	C	A	B	C	A	B	C
0.45 m	-	-	-	1	-	-	-	-	-	-	-	-
0.50 m	2	-	-	-	-	-	-	-	-	-	-	-
0.73 m	-	-	-	2	-	-	-	-	-	-	1	-
1.00 m	3	-	2	1	-	-	-	-	1	-	-	-
1.04 m	-	-	-	1	-	-	-	-	-	1	-	-
1.09 m	-	-	-	3	1	-	-	-	2	-	1	-
1.29 m	1	1	1	1	3	-	-	-	2	1	-	-
1.40 m	-	5	-	4	1	1	-	-	2	-	-	-
1.50 m	3	2	-	1	-	-	1	2	-	-	-	-
1.57 m	1	-	-	4	-	-	-	-	3	-	-	-
2.00 m	-	3	-	4	4	-	-	-	-	1	-	-
2.07 m	-	7	-	6	-	-	-	-	4	-	1	-
2.50 m	1	4	-	5	5	-	-	-	-	1	-	-
2.57 m	1	-	-	7	-	-	-	-	5	-	-	-
3.00 m	2	-	2	6	9	-	-	-	5	1	-	-
3.07 m	7	1	-	5	1	-	-	-	6	-	4	-

Example: A 1.09 m wide bay can be covered with 3x 0.32 m decks (Variant A) or 1x 0.61 m + 1x 0.32 m decks (Variant B).

## Loading capacity U-ledger LW T14, steel\*

Ledger type and length [m]	U-LW 0.73	U-LW 1.09	U-LW 1.40
Evenly distributed line load q [kN/m]	19.0	17.5	10.8
Individual load P in bay centre [kN]	6.1	8.6	6.4


## Loading capacity U-ledger reinforced LW T14\*

Length [m]	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load q [kN/m]	19.8	17.7	13.0	8.4	5.0
Individual load P in bay centre [kN]	19.2	17.1	12.9	10.4	8.7




## Loading capacity O-ledger reinforced LW\*

Length [m]	1.09	1.40	1.57	2.07	2.57	3.07
Evenly distributed line load q [kN/m]	21.4	17.1	16.1	11.1	8.5	6.0
Individual load P in bay centre [kN]	19.6	19.4	17.3	13.2	10.7	9.0



\* permissible working load

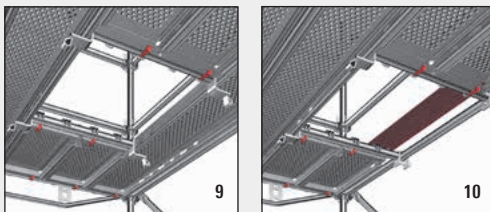


Openings, accesses and even conversions are easily constructed with **U- and O-ledgers 9-12** with lateral receiving elements.

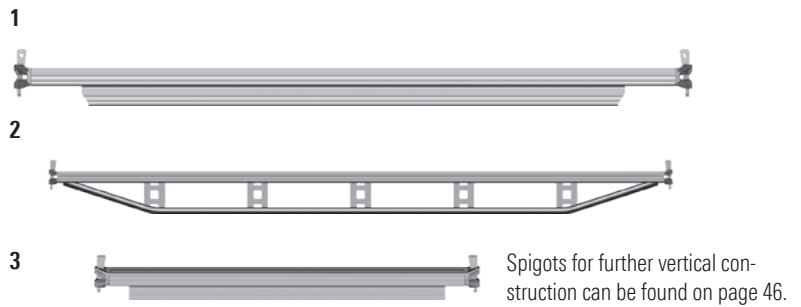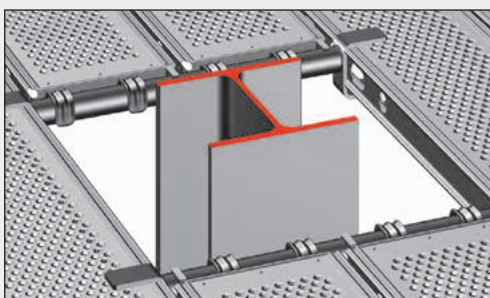


The **U-Lift-off preventer 3** is for U-ledgers, U-bridging ledgers, U-ledgers reinforced and U-lattice beams. It serves to prevent scaffolding decks from being lifted off.

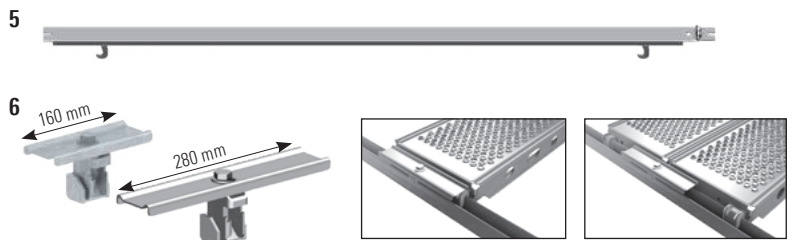


U-Version



O-Version

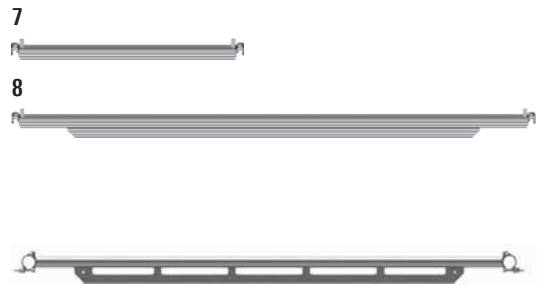

The use of the interchangeable ledger in O-variant can be made by use of the Speedy Vario anchoring ledger LW (Ref. No. 1754.xxx). Learn more in the catalogue SpeedyScaf.

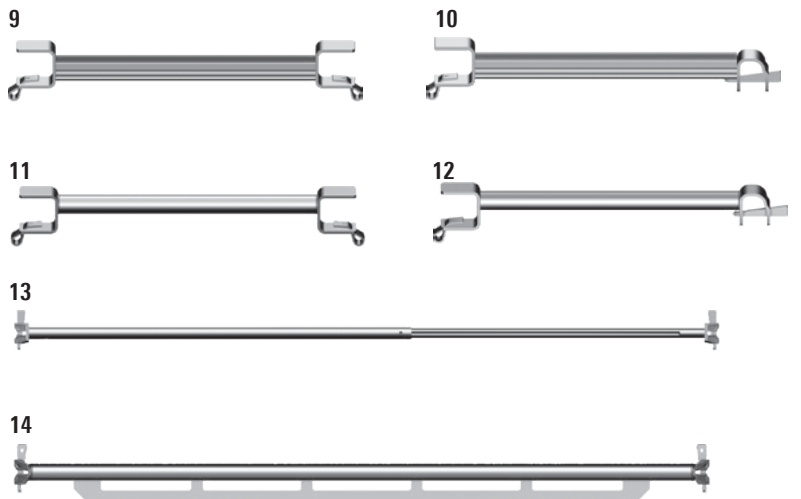


Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>U-ledger reinforced LW T14</b> steel			1.40	8.90	50	<b>2618.140</b>	
				1.57	9.40	50	<b>2618.157</b>	
				2.07	12.70	50	<b>2618.207</b>	
				2.57	15.70	50	<b>2618.257</b>	
	steel, metric			3.07	19.00	50	<b>2618.307</b>	
				2.00	12.50	50	<b>2618.200</b>	
				2.50	15.50	50	<b>2618.250</b>	
				3.00	18.50	50	<b>2618.300</b>	
2	<b>U-bridging ledger</b> aluminium			1.57	4.30	25	<b>3207.157</b>	
				2.07	5.50	25	<b>3207.207</b>	
3	<b>U-ledger reinforced</b> aluminium			1.09	3.70	50	<b>3203.109</b>	
				1.40	4.50	50	<b>3203.140</b>	
4	<b>U-Lift-off preventer T8</b>			0.39	0.60	250	<b>2635.039</b>	
				0.45	0.70	250	<b>2635.045</b>	
				0.50	0.80	250	<b>2635.050</b>	
				0.73	1.30	250	<b>2635.073</b>	
				1.00	1.70	50	<b>2635.100</b>	
				1.09	1.80	50	<b>2635.109</b>	
				1.29	2.10	50	<b>2635.129</b>	
5	<b>U-Lift-off preventer T9</b>			1.40	5.30	50	<b>2658.140</b>	
				1.57	5.90	50	<b>2658.157</b>	
				2.07	7.90	50	<b>2658.207</b>	
				2.57	9.90	50	<b>2658.257</b>	
				3.07	11.90	50	<b>2658.307</b>	
6	<b>Universal U-Lift-off preventer</b>		19	0.16	0.70	250	<b>2635.002</b>	
			22	0.16	0.70	250	<b>2635.003</b>	
			19	0.28	1.00	250	<b>2635.000</b>	
			22	0.28	1.00	250	<b>2635.001</b>	
7	<b>U-interchangeable ledger LW</b> steel, galvanized			0.73	2.90	100	<b>2600.073</b>	
				1.09	4.20	20	<b>2600.109</b>	
8	<b>U-interchangeable ledger LW reinforced</b> steel, galvanized			1.40	8.70	50	<b>2600.140</b>	
				1.57	9.50	20	<b>2600.157</b>	
				2.07	12.50	20	<b>2600.207</b>	
				2.57	15.50	20	<b>2600.257</b>	
				3.07	18.50	20	<b>2600.307</b>	
9	<b>U-ledger steel deck – steel deck</b> for connection on both sides to the steel deck flank, with securing flaps, loadable up to load class 3, up to steel decks of 3.07 m			0.32	3.10	100	<b>2614.030</b>	
				0.64	4.30	50	<b>2614.073</b>	
				0.96	5.50	50	<b>2614.108</b>	
10	<b>U-ledger steel deck – O-ledger</b> one side for connection to the steel deck flank, with securing flap, the other side for connection to an O-ledger, with securing wedge			0.32	3.30	100	<b>2614.001</b>	
				0.64	4.40	50	<b>2614.002</b>	
				0.96	6.50	50	<b>2614.004</b>	
11	<b>U-ledger steel deck – steel deck</b> for connection on both sides to the steel deck flank, with securing flaps, loadable up to load class 3, up to steel decks of 3.07 m			0.32	3.10	100	<b>2614.069</b>	
				0.64	4.20	50	<b>2614.070</b>	
				0.96	5.20	50	<b>2614.071</b>	
12	<b>U-ledger steel deck – O-ledger</b> one side for connection to the steel deck flank, with securing flap, the other side for connection to an O-ledger, with securing wedge			0.32	2.40	100	<b>2614.032</b>	
				0.64	4.40	50	<b>2614.064</b>	
				0.96	5.50	50	<b>2614.096</b>	
13	<b>Guardrail</b> adjustable, for use in compensation bays		1.57 – 2.57	8.50	50	<b>2606.000</b>		
			1.09 – 1.57	5.70	50	<b>2606.001</b>		
14	<b>O-bridging ledger LW</b> steel			1.09	5.90	50	<b>2672.109</b>	
				1.40	7.70	50	<b>2672.140</b>	
				1.57	8.70	50	<b>2672.157</b>	
				2.07	11.40	50	<b>2672.207</b>	
				2.57	14.30	50	<b>2672.257</b>	
				3.07	17.00	50	<b>2672.307</b>	

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layerher Individual possible  
 = new in the catalogue



## Diagonal bracing

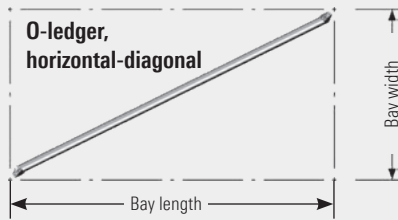

The **O-ledge LW, horizontal-diagonal**, with wedge heads serves to brace horizontal levels in scaffolding without standard decks or in scaffolding with board decking.

The **diagonal braces LW** with wedge locks further brace the basic system consisting of standards and ledgers, and thanks to their high connection values also facilitate special structures.



The bay length is displayed in numbers and by a defined colour code.


Number of rosettes tell you which standard is used.

**Note:** labels can be reordered.


### COLOUR CODING

Bay length	Bay width	Ref. No.
0.73 m	2.00 m	2683.073
1.09 m	2.00 m	2683.109
1.40 m	2.00 m	2683.140
1.57 m	2.00 m	2683.157
2.07 m	2.00 m	2683.207
2.57 m	2.00 m	2683.257
3.07 m	2.00 m	2683.307


### O-ledge LW, horizontal-diagonal

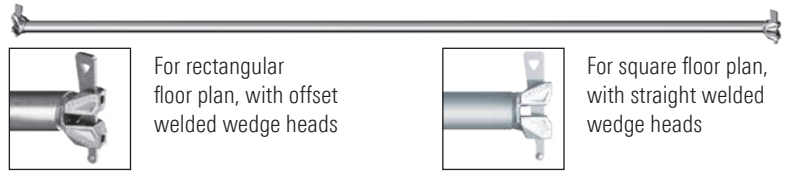

### Distinction between right and left horizontal diagonal brace




From top view, the wedge head of a left horizontal diagonal brace points to the left side.

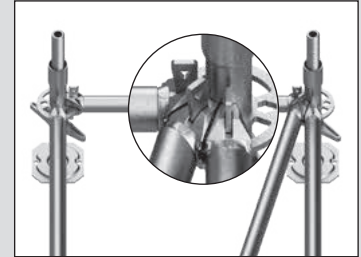

From top view, the wedge head of a right horizontal diagonal brace points to the right side.

### Diagonal

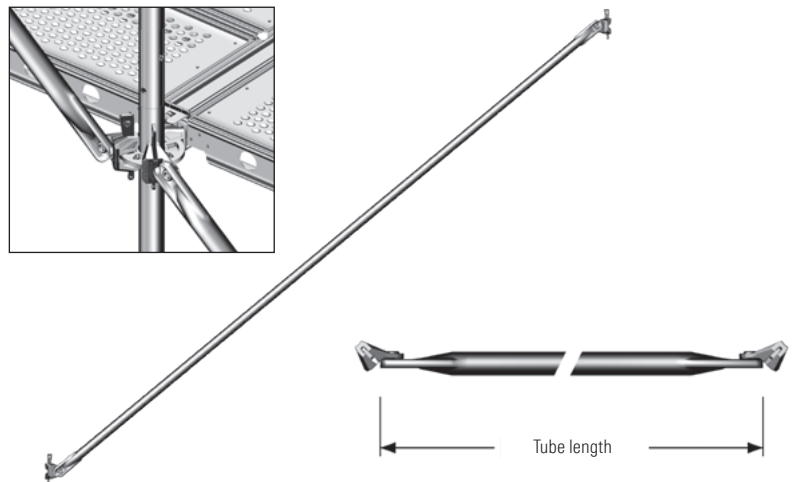


Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>O-ledge LW, horizontal-diagonal, steel</b>				
	for 1.09 m bay length, 1.09 m bay width		1.54	5.50	50 <b>2678.109</b> 🚚
	for 1.29 m bay length, 1.29 m bay width		1.82	6.45	50 <b>2678.129</b> 🕒
	for 1.57 m bay length, 1.09 m bay width, right		1.91	6.73	50 <b>2678.158</b> 🚚
	for 1.57 m bay length, 1.57 m bay width		2.20	7.70	50 <b>2678.157</b> 🚚
	for 2.00 m bay length, 1.00 m bay width, left		2.23	7.83	50 <b>2678.201</b> 🚚
	for 2.00 m bay length, 2.00 m bay width		2.83	9.60	50 <b>2678.200</b> 🚚
	for 2.07 m bay length, 0.73 m bay width, left		2.19	7.80	50 <b>2678.208</b> 🚚
	for 2.07 m bay length, 1.04 m bay width, left		2.32	8.08	50 <b>2678.206</b> 🚚
	for 2.07 m bay length, 1.09 m bay width, right		2.34	8.10	50 <b>2678.209</b> 🚚
	for 2.07 m bay length, 1.57 m bay width, left		2.60	9.20	50 <b>2678.205</b> 🕒
	for 2.07 m bay length, 2.07 m bay width		2.93	10.00	50 <b>2678.207</b> 🚚
	for 2.57 m bay length, 0.73 m bay width, left		2.67	9.30	50 <b>2678.258</b> 🚚
	for 2.57 m bay length, 1.09 m bay width, right		2.79	9.61	50 <b>2678.259</b> 🚚
	for 2.57 m bay length, 1.57 m bay width, right		3.01	10.30	50 <b>2678.256</b> 🚚
	for 2.57 m bay length, 2.07 m bay width, right		3.30	11.20	50 <b>2678.255</b> 🚚
	for 2.57 m bay length, 2.57 m bay width		3.64	12.20	50 <b>2678.257</b> 🚚
	for 3.07 m bay length, 0.73 m bay width, left		3.16	10.90	50 <b>2678.308</b> 🕒
	for 3.07 m bay length, 1.09 m bay width, right		3.26	11.11	50 <b>2678.309</b> 🕒
	for 3.07 m bay length, 3.07 m bay width		4.34	14.50	50 <b>2678.307</b> 🚚

Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Diagonal brace LW, steel, 2.00 m bay height</b>					
	0.73 m bay length		2.12	7.10	50	2683.073
	1.04 m bay length		2.23	7.60	50	2683.104
	1.09 m bay length		2.25	7.60	50	2683.109
	1.29 m bay length		2.35	7.80	50	2683.129
	1.40 m bay length		2.40	7.90	50	2683.140
	1.57 m bay length		2.49	8.20	50	2683.157
	2.07 m bay length		2.81	9.20	50	2683.207
	2.57 m bay length		3.18	10.00	50	2683.257
	3.07 m bay length		3.58	11.10	50	2683.307
	4.14 m bay length		4.51	13.70	50	2683.414
	1.00 m bay length		2.22	7.30	50	2683.100
	2.00 m bay length		2.76	9.10	50	2683.200
	2.50 m bay length		3.12	9.90	50	2683.250
3.00 m bay length		3.52	11.00	50	2683.300	
2	<b>Diagonal brace LW, steel, 1.50 m bay height</b>					
	0.73 m bay length		1.65	5.80	50	2682.073
	1.04 m bay length		1.79	6.20	50	2682.104
	1.09 m bay length		1.81	6.30	50	2682.109
	1.29 m bay length		1.92	6.70	50	2682.129
	1.40 m bay length		1.99	6.80	50	2682.140
	1.57 m bay length		2.11	7.30	50	2682.157
	2.07 m bay length		2.48	8.20	50	2682.207
	2.57 m bay length		2.89	9.50	50	2682.257
	3.07 m bay length		3.32	10.50	50	2682.307
	1.00 m bay length		1.77	6.20	50	2682.100
	2.00 m bay length		2.42	8.00	50	2682.200
	2.50 m bay length		2.83	9.00	50	2682.250
	3.00 m bay length		3.26	10.30	50	2682.300
3	<b>Diagonal brace LW, steel, 1.00 m bay height</b>					
	0.73 m bay length		1.20	4.80	50	2681.073
	1.04 m bay length		1.39	5.10	50	2681.104
	1.09 m bay length		1.41	5.20	50	2681.109
	1.29 m bay length		1.55	5.60	50	2681.129
	1.40 m bay length		1.64	5.80	50	2681.140
	1.57 m bay length		1.79	6.20	50	2681.157
	2.07 m bay length		2.20	7.40	50	2681.207
	2.57 m bay length		2.66	8.60	50	2681.257
	3.07 m bay length		3.13	9.90	50	2681.307
	1.00 m bay length		1.36	5.00	50	2681.100
	2.00 m bay length		2.14	7.20	50	2681.200
	2.50 m bay length		2.59	8.50	50	2681.250
	3.00 m bay length		3.06	9.70	50	2681.300
4	<b>Diagonal brace LW, steel, 0.50 m bay height</b>					
	0.73 m bay length		0.75	3.60	50	2680.073
	1.04 m bay length		1.08	4.20	50	2680.104
	1.09 m bay length		1.10	4.40	50	2680.109
	1.29 m bay length		1.29	4.90	50	2680.129
	1.40 m bay length		1.38	5.10	50	2680.140
	1.57 m bay length		1.55	5.60	50	2680.157
	2.07 m bay length		2.03	6.90	50	2680.207
	2.57 m bay length		2.51	8.20	50	2680.257
	3.07 m bay length		3.00	9.60	50	2680.307
	1.00 m bay length		1.03	4.30	50	2680.100
	2.00 m bay length		1.96	6.70	50	2680.200
	2.50 m bay length		2.44	8.10	50	2680.250
	3.00 m bay length		2.93	9.40	50	2680.300
5	<b>Diagonal brace, aluminium, 2.00 m bay height</b>					
	0.73 m bay length		2.12	3.85	50	3204.073
	1.09 m bay length		2.25	4.05	50	3204.109
	1.40 m bay length		2.40	4.20	50	3204.140
	1.57 m bay length		2.49	4.30	50	3204.157
	2.07 m bay length		2.81	4.72	50	3204.207
	2.57 m bay length		3.18	4.90	50	3204.257
3.07 m bay length		3.58	5.25	50	3204.307	

## Scaffolding decks, U-suspension

Our scaffolding decks comply with the requirements of DIN EN 12811.

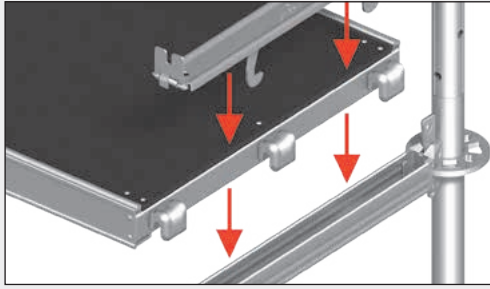


### U-suspension

In the Layher system, depending on the type of application and scaffolding group but also in accordance with your working requirements and priorities, choose from decks made of hot-dip galvanized steel, aluminium, or an aluminium frame with plywood or plastic board. The load-bearing capacity of the overall system must be observed. The claws of the Layher scaffolding decks slide easily during assembly into the U-/O-sections of the transverse ledgers, ensuring unbeatable speed of assembly. Decks with round ledger supports are especially suitable for abrasive-blasting work in order to avoid blasting residue deposits.


The **U-steel deck LW 1** fulfils the same load-bearing capacities as the proven **U-steel deck T4 2** with a considerably lower weight thanks to the use of high-tensile steel and intelligent combination of perforation and profiling.

The **U-Xtra-N deck 4** is identical in construction with the robust deck, but is equipped with a glass-fibre-reinforced plastic plate. It is very weather-resistant: No rotting, no fungus growth, no split-open rivet holes. The breaking load of the plastic plate is about 3 times that of dry plywood. The surface has a proven anti-slip structure, which is very easy to clean. Plaster and dirt can be easily removed by using a high-pressure cleaner or a scraper.



Thanks to optimization of the cap of the **steel deck T4/LW**, precision-fit decking above the rosette is possible.

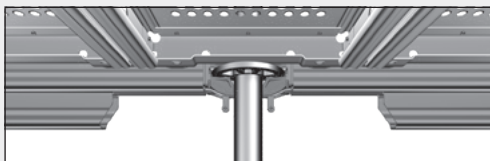

The **U-stalu deck 6-9**, is an extremely lightweight and durable aluminium deck with a sturdy, riveted steel cap.

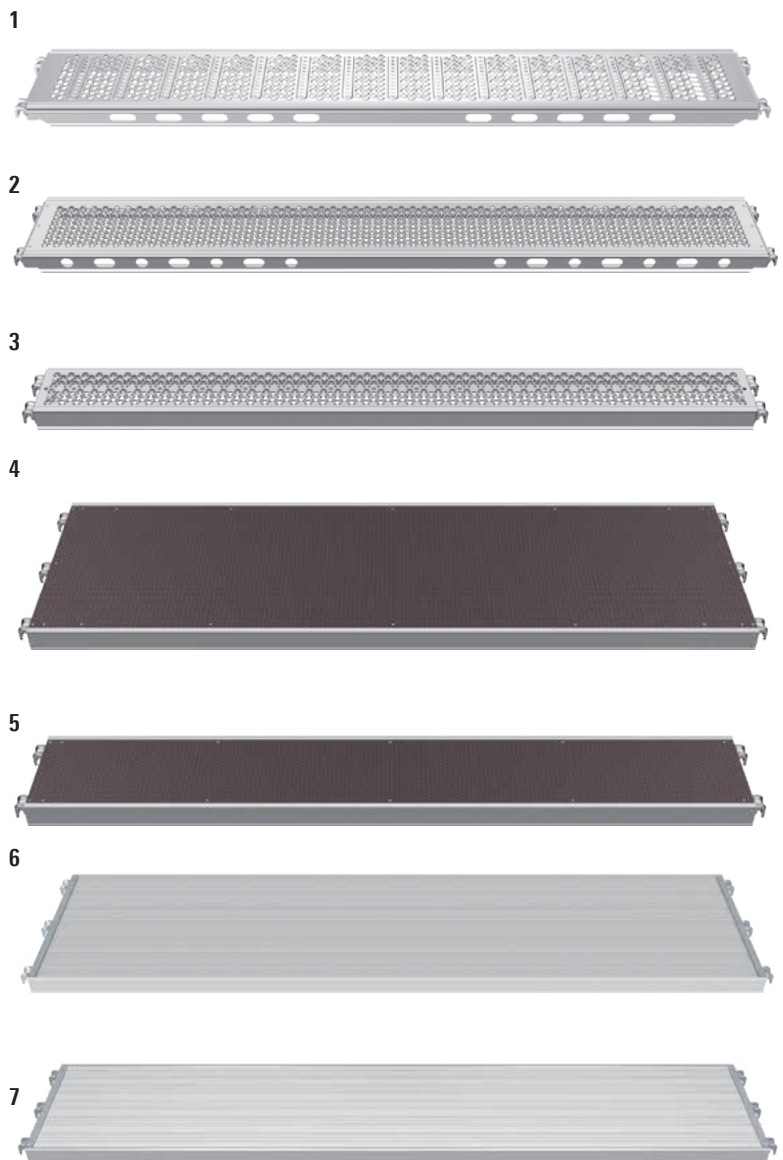

### U-stalu deck 50 in surface scaffolding

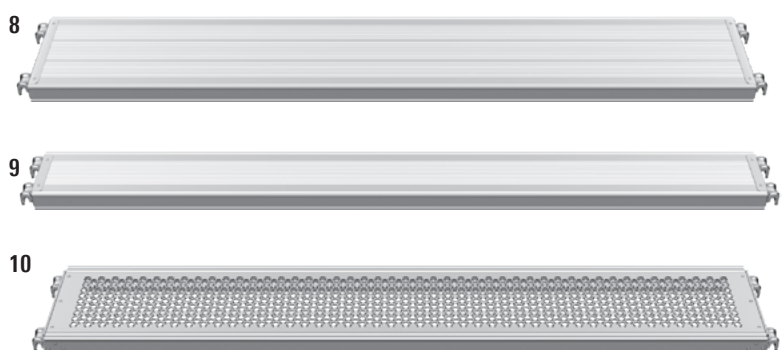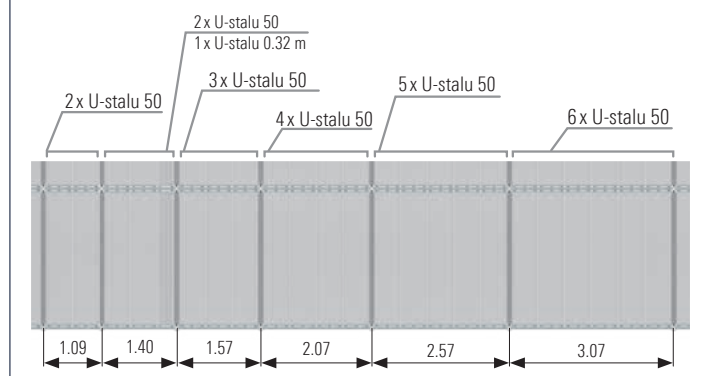




Pos.	Description		Use up to load class	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>U-steel deck LW, 0.32 m wide</b> steel, hot-dip galvanized, perforated, non-slip working surface	IND	6	0.73 x 0.32	5.60	60	<b>3883.073</b>	
		IND	6	1.00 x 0.32	7.20	60	<b>3883.100</b>	
		IND	6	1.04 x 0.32	7.40	60	<b>3883.104</b>	
		IND	6	1.09 x 0.32	7.70	60	<b>3883.109</b>	
		IND	6	1.29 x 0.32	8.60	60	<b>3883.129</b>	
		IND	6	1.40 x 0.32	9.35	60	<b>3883.140</b>	
		IND	6	1.50 x 0.32	10.10	60	<b>3883.150</b>	
		IND	6	1.57 x 0.32	10.50	60	<b>3883.157</b>	
		IND	6	2.00 x 0.32	12.90	60	<b>3883.200</b>	
		IND	6	2.07 x 0.32	13.40	60	<b>3883.207</b>	
		IND	5	2.50 x 0.32	15.90	60	<b>3883.250</b>	
		IND	5	2.57 x 0.32	16.40	60	<b>3883.257</b>	
		IND	4	3.00 x 0.32	18.80	60	<b>3883.300</b>	
		IND	4	3.07 x 0.32	19.30	60	<b>3883.307</b>	
2	<b>U-steel deck T4, 0.32 m wide</b> steel, hot-dip galvanized, perforated, non-slip working surface	IND	6	0.73 x 0.32	6.00	60	<b>3812.073</b>	
		IND	6	1.09 x 0.32	8.30	60	<b>3812.109</b>	
		IND	6	1.40 x 0.32	10.60	60	<b>3802.140</b>	
		IND	6	1.57 x 0.32	11.60	60	<b>3812.157</b>	
		IND	6	2.07 x 0.32	14.90	60	<b>3812.207</b>	
		IND	5	2.57 x 0.32	18.20	60	<b>3812.257</b>	
		IND	4	3.07 x 0.32	21.50	60	<b>3812.307</b>	
3	<b>U-steel deck, 0.19 m wide</b> constructed as Ref. No. 3812.xxx, as equalizing deck, e.g. for birdcage scaffolding	IND	6	0.73 x 0.19	5.10	50	<b>3801.073</b>	
		IND	6	1.09 x 0.19	6.40	50	<b>3801.109</b>	
		IND	6	1.29 x 0.19	7.40	50	<b>3801.129</b>	
		IND	6	1.40 x 0.19	8.00	50	<b>3801.140</b>	
		IND	6	1.57 x 0.19	8.50	50	<b>3801.157</b>	
		IND	6	2.07 x 0.19	10.20	50	<b>3801.207</b>	
		IND	5	2.57 x 0.19	13.20	50	<b>3801.257</b>	
		IND	4	3.07 x 0.19	15.30	50	<b>3801.307</b>	
4	<b>U-Xtra-N deck, 0.61 m wide</b> aluminium stile section, glass-fibre-reinforced plastic plate, extremely durable, lightweight, non-slip working surface	IND	3	0.73 x 0.61	7.00	60	<b>3866.073</b>	
		IND	3	1.09 x 0.61	9.50	60	<b>3866.109</b>	
		IND	3	1.57 x 0.61	13.00	40	<b>3866.157</b>	
		IND	3	2.07 x 0.61	16.20	40	<b>3866.207</b>	
		IND	3	2.57 x 0.61	19.00	40	<b>3866.257</b>	
		IND	3	3.07 x 0.61	22.50	40	<b>3866.307</b>	
5	<b>U-Xtra-N deck, 0.32 m wide</b> constructed as Ref. No. 3866.xxx, as equalizing deck, e.g. for birdcage scaffolding	IND	6	1.57 x 0.32	8.50	30	<b>3877.157</b>	
		IND	5	2.07 x 0.32	10.70	30	<b>3877.207</b>	
		IND	4	2.57 x 0.32	13.00	30	<b>3877.257</b>	
		IND	3	3.07 x 0.32	15.20	30	<b>3877.307</b>	
6	<b>U-stalu deck T21, 0.61 m wide</b> lightweight aluminium deck with sturdy, riveted steel caps	IND	6	0.73 x 0.61	6.70	34	<b>3898.073</b>	
		IND	6	1.09 x 0.61	9.00	34	<b>3898.109</b>	
		IND	6	1.40 x 0.61	11.00	34	<b>3898.140</b>	
		IND	6	1.57 x 0.61	12.10	34	<b>3898.157</b>	
		IND	6	2.07 x 0.61	15.30	34	<b>3898.207</b>	
		IND	5	2.57 x 0.61	18.50	34	<b>3898.257</b>	
		IND	4	3.07 x 0.61	21.70	34	<b>3898.307</b>	
7	<b>U-stalu deck 50</b> for quick and economical decking of surface scaffolding with the U-cover ledger 80 LW for closed surface	IND	6	0.73 x 0.50	6.00	34	<b>3855.073</b>	
		IND	6	1.09 x 0.50	8.00	34	<b>3855.109</b>	
		IND	6	1.40 x 0.50	9.70	40	<b>3855.140</b>	
		IND	6	1.57 x 0.50	10.30	34	<b>3855.157</b>	
		IND	6	2.07 x 0.50	13.10	34	<b>3855.207</b>	
		IND	5	2.57 x 0.50	15.90	34	<b>3855.257</b>	
		IND	4	3.07 x 0.50	18.60	34	<b>3855.307</b>	
		IND	6	1.57 x 0.32	7.40	30	<b>3856.157</b>	
8	<b>U-stalu deck T9, 0.32 m wide</b> constructed as Ref. No. 3867.xxx, as equalizing deck, e.g. for birdcage scaffolding	IND	6	2.07 x 0.32	9.20	30	<b>3856.207</b>	
		IND	5	2.57 x 0.32	11.00	30	<b>3856.257</b>	
		IND	4	3.07 x 0.32	13.30	30	<b>3856.307</b>	
		IND	6	1.57 x 0.19	5.60	50	<b>3857.157</b>	
9	<b>U-stalu deck T9, 0.19 m wide</b> constructed as Ref. No. 3867.xxx, as equalizing deck, e.g. for birdcage scaffolding	IND	6	2.07 x 0.19	7.20	50	<b>3857.207</b>	
		IND	5	2.57 x 0.19	8.70	50	<b>3857.257</b>	
		IND	4	3.07 x 0.19	10.20	50	<b>3857.307</b>	
		IND	6	0.73 x 0.32	3.10	60	<b>3803.073</b>	
10	<b>U-alu deck, perforated, 0.32 m wide</b> deck and caps of aluminium with robust steel claws, perforated, non-slip working surface		6	1.09 x 0.32	4.40	60	<b>3803.109</b>	
			6	1.57 x 0.32	6.50	60	<b>3803.157</b>	
			5	2.07 x 0.32	8.00	60	<b>3803.207</b>	
			4	2.57 x 0.32	10.00	60	<b>3803.257</b>	
			3	3.07 x 0.32	11.50	60	<b>3803.307</b>	

## Scaffolding decks, access decks, corner-decks, U-suspension

Internal accesses can be built into the scaffolding with the **access decks**. These decks conform to the requirements of DIN EN 12811 and are available with a separate or an integrated access ladder for internal access.




In the case of circular scaffolding, the corners are covered with the **U-corner deck, adjustable**, with toe board **8**. System-conforming covers are thus no longer a problem. You obtain a continuous walk surface with integrated toe board.



Installation situation 45° **8**




Installation situation 90° **8**




Installation situation 90° **10**

The **access ladder, T19 13**, 7-rungs is a flexible aid to climbing inside the scaffolding to a storey height of 2 m.

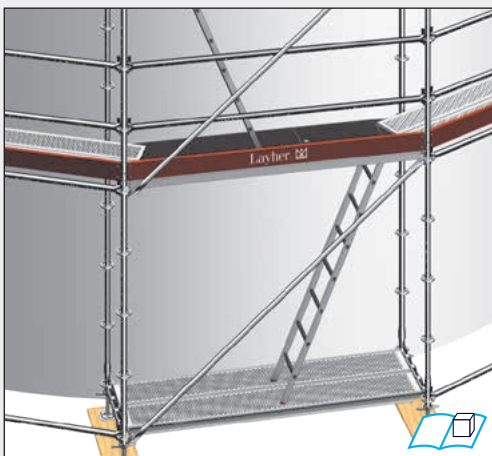

Installation situation U-robust access deck with hatch offset **14**

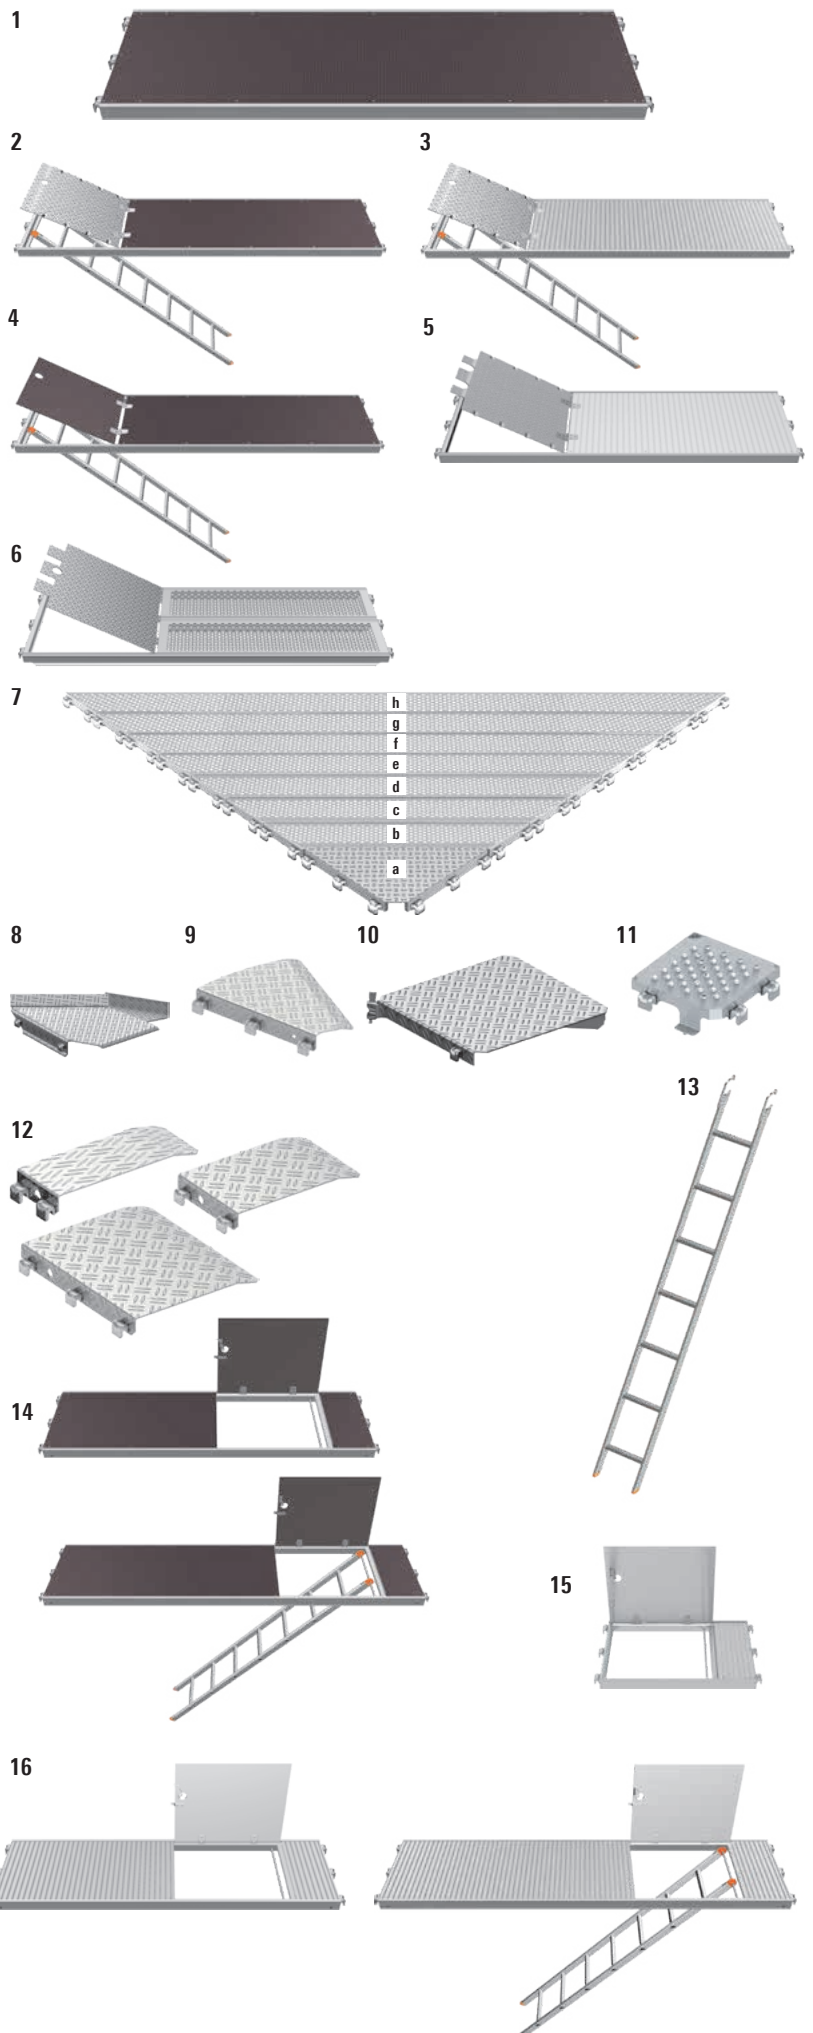


Pos.	Description		Use up to load class	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>U-robust deck T9, 0.61 m wide</b> aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection; lightweight, non-slip, easily stackable	IND	3	1.57 x 0.61	13.10	40	3835.157	
		IND	3	2.07 x 0.61	16.40	40	3835.207	
		IND	3	2.57 x 0.61	19.30	40	3835.257	
		IND	3	3.07 x 0.61	22.60	40	3835.307	
2	<b>U-Xtra-N hatch-type access deck 0.61 m wide, with integrated access ladder</b> deck surface of glass-fibre-reinforced plastic, aluminium access hatch	IND	3	2.57 x 0.61	25.40	40	3869.257	
		IND	3	3.07 x 0.61	29.50	40	3869.307	
3	<b>U-aluminium access deck, 0.61 m wide, with integrated access ladder</b> lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	2.57 x 0.61	24.00	40	3852.257	
		IND	3	3.07 x 0.61	28.00	40	3852.307	
4	<b>U-robust access deck, 0.61 m wide, with integrated access ladder</b>	IND	3	2.57 x 0.61	24.00	40	3838.257	
		IND	3	3.07 x 0.61	27.40	40	3838.307	
5	<b>U-aluminium access deck, 0.61 m wide</b> lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	1.57 x 0.61	15.10	40	3851.157	
		IND	3	2.07 x 0.61	17.00	40	3851.207	
		IND	3	2.57 x 0.61	20.00	40	3851.257	
		IND	3	3.07 x 0.61	24.50	40	3851.307	
6	<b>U-access deck, steel, 0.64 m wide</b> aluminium access hatch		4	2.07 x 0.64	28.90	30	3813.207	
			4	2.57 x 0.64	38.00	30	3813.257	
7	<b>U-steel deck 45°</b>							
		Ⓢ	3	0.80 x 0.35	8.61	60	3868.101	
		Ⓢ	3	1.17 x 0.19	6.35	50	3868.102	
		Ⓢ	3	1.56 x 0.19	7.89	50	3868.103	
		Ⓢ	3	1.94 x 0.19	9.68	50	3868.104	
		Ⓢ	3	2.33 x 0.19	11.46	50	3868.105	
		Ⓢ	3	2.71 x 0.19	13.25	50	3868.106	
		Ⓢ	3	3.09 x 0.19	16.82	50	3868.107	
8	<b>Corner deck, adjustable</b> steel, for angles from 45° – 90°, with toe board		3	0.61	21.50	30	3819.000	
9	<b>U-corner deck for circular scaffolding 30°</b>		3	0.73	8.50	120	3868.000	
10	<b>U-corner deck</b>							
		Ⓢ	3	0.36 x 0.36	6.40	50	2630.037	
11	<b>U-console corner deck</b>	Ⓢ		0.19 x 0.19	2.09	100	3868.319	
		Ⓢ		0.32 x 0.32	3.66	50	3868.332	
12	<b>U-deck for equalisation bay</b> for bridings up to 0.50 m		3	0.50 x 0.19	4.30	100	3868.019	
			3	0.50 x 0.32	7.22	100	3868.032	
			3	0.50 x 0.61	13.76	100	3868.061	
13	<b>Access ladder, T19</b> steel, 7 rungs			2.15 x 0.35	7.60	70	4009.007	
14	<b>U-robust access deck, 0.61 m wide, hatch offset</b>							
		IND	3	1.57 x 0.61	14.20	40	3858.157	
		IND	3	2.07 x 0.61	17.20	40	3858.207	
		IND	3	2.57 x 0.61	25.20	40	3859.257	
15	<b>U-aluminium access deck, 1.00 m wide</b> lightweight access deck with aluminium deck surface and aluminium access hatch	IND	3	1.00 x 0.61	10.00	40	3851.100	
16	<b>U-access deck</b>							
		IND	3	2.07 x 0.61	17.60	40	3875.207	
		IND	3	2.57 x 0.61	25.00	40	3875.257	
		IND	3	3.07 x 0.61	29.00	40	3875.307	


WS = wrench size PU = packaging unit Ⓢ = available ex works ⌚ = delivery time on request 📦 = only available in this packaging unit Ⓢ = the approval process is not yet completed IND = Layer Individual possible

📦 = new in the catalogue



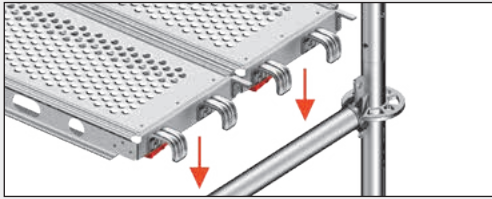

O-suspension

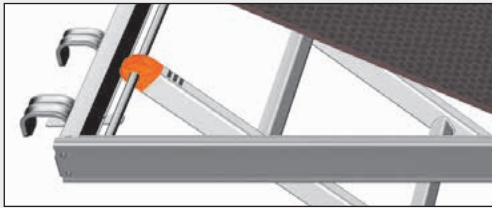


**Individual stamping**

The Layher steel decks can be provided with individual lettering. Conspicuously visible on the side section, they give the Layher steel deck that certain something.



Similar to the steel decks also the Stalu, Xtra-N and robust decks can be individualized. The stamping is particularly high-quality. The needle stamping process provides fine and very precise lettering.

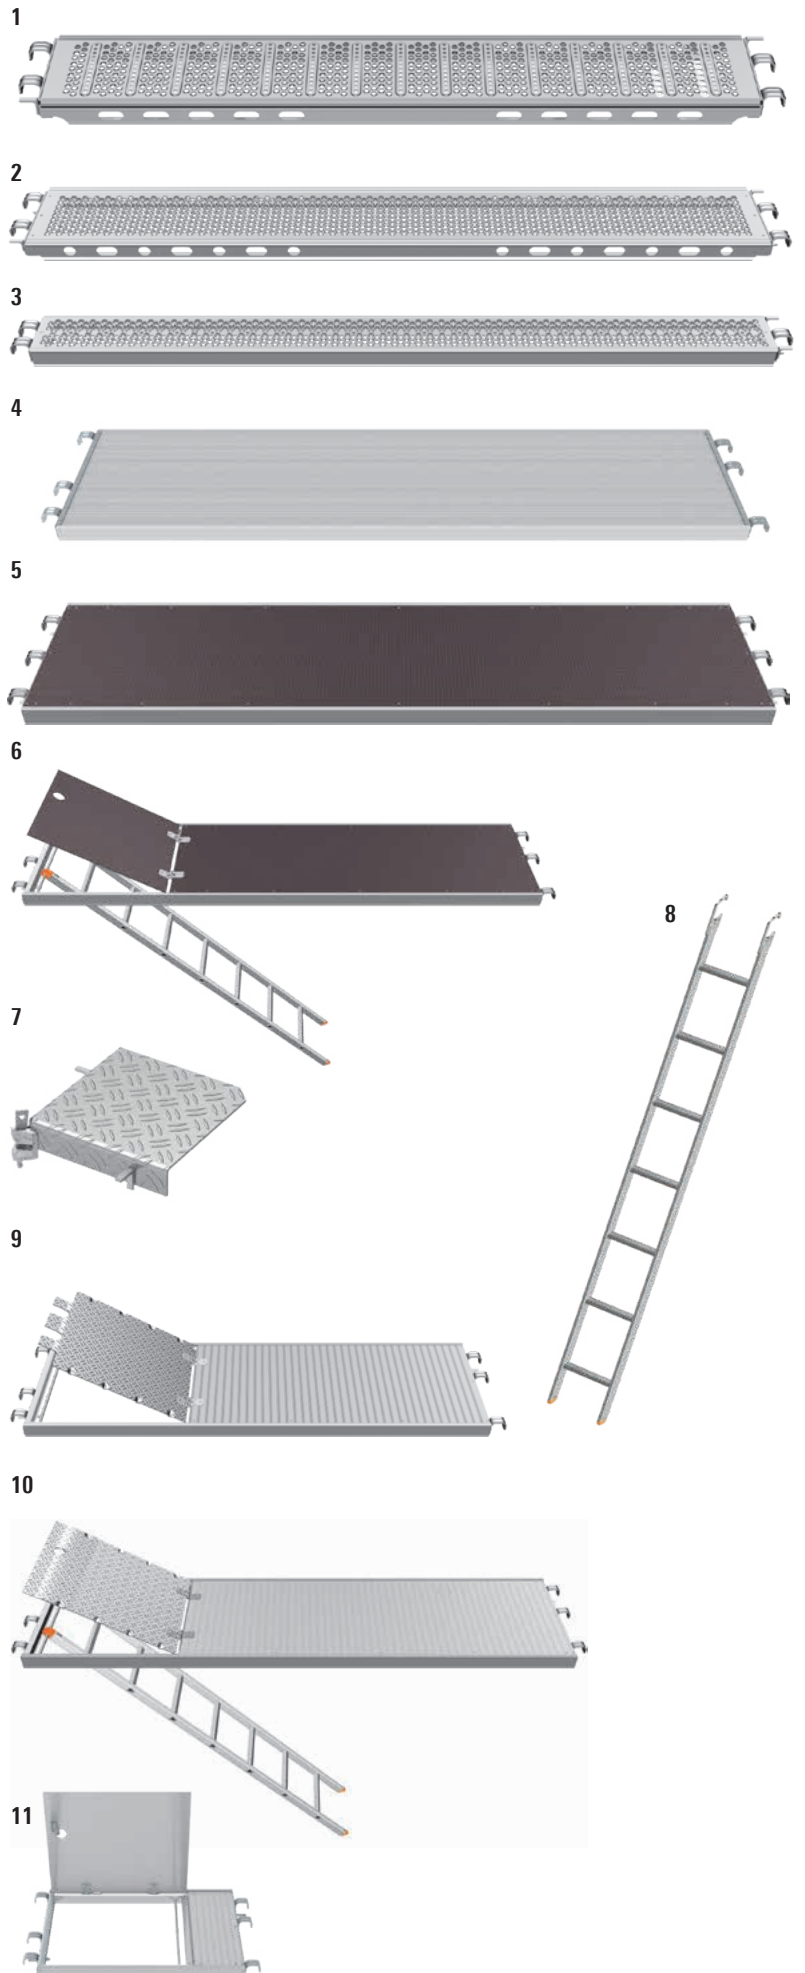

Pos.	Description		Use up to load class	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>O-steel deck LW, 0.32 m wide</b> steel, hot-dip galvanized; with integrated lift-off and tilt preventer, perforated, non-slip working surface	IND	6	0.73 x 0.32	6.40	30	<b>3890.073</b>	
		IND	6	1.00 x 0.32	7.60	30	<b>3890.100</b>	
		IND	6	1.09 x 0.32	8.50	30	<b>3890.109</b>	
		IND	6	1.29 x 0.32	9.30	30	<b>3890.129</b>	
		IND	6	1.40 x 0.32	10.10	30	<b>3890.140</b>	
		IND	6	1.50 x 0.32	10.80	30	<b>3890.150</b>	
		IND	6	1.57 x 0.32	11.30	30	<b>3890.157</b>	
		IND	6	2.00 x 0.32	13.70	30	<b>3890.200</b>	
		IND	6	2.07 x 0.32	14.20	30	<b>3890.207</b>	
		IND	5	2.50 x 0.32	16.90	30	<b>3890.250</b>	
		IND	5	2.57 x 0.32	17.20	30	<b>3890.257</b>	
		IND	4	3.00 x 0.32	19.60	30	<b>3890.300</b>	
		IND	4	3.07 x 0.32	20.10	30	<b>3890.307</b>	
2	<b>O-steel deck T9, 0.32 m wide</b> steel, hot-dip galvanized; with integrated swivelling lift-off and tilt preventer, perforated, non-slip working surface	IND	6	0.73 x 0.32	6.80	30	<b>3862.073</b>	
		IND	6	1.09 x 0.32	9.10	30	<b>3862.109</b>	
		IND	6	1.40 x 0.32	10.80	30	<b>3862.140</b>	
		IND	6	1.57 x 0.32	12.40	30	<b>3862.157</b>	
		IND	6	2.07 x 0.32	15.70	30	<b>3862.207</b>	
		IND	5	2.57 x 0.32	19.00	30	<b>3862.257</b>	
		IND	4	3.07 x 0.32	22.30	30	<b>3862.307</b>	
3	<b>O-steel deck T9, 0.19 m wide</b> steel, hot-dip galvanized; with integrated swivelling lift-off and tilt preventer, perforated, non-slip working surface	IND	6	0.73 x 0.19	5.00	50	<b>3863.073</b>	
		IND	6	1.09 x 0.19	7.00	50	<b>3863.109</b>	
		IND	6	1.40 x 0.19	7.60	50	<b>3863.140</b>	
		IND	6	1.57 x 0.19	8.40	50	<b>3863.157</b>	
		IND	6	2.07 x 0.19	10.71	50	<b>3863.207</b>	
		IND	5	2.57 x 0.19	13.00	50	<b>3863.257</b>	
		IND	4	3.07 x 0.19	18.20	50	<b>3863.307</b>	
4	<b>O-stalu deck T21</b> lightweight aluminium deck with sturdy, riveted steel caps	IND	6	1.57 x 0.61	12.90	34	<b>3888.157</b>	
		IND	6	2.07 x 0.61	16.10	34	<b>3888.207</b>	
		IND	5	2.57 x 0.61	19.30	34	<b>3888.257</b>	
		IND	4	3.07 x 0.61	22.50	34	<b>3888.307</b>	
5	<b>O-robust deck T9, 0.61 m wide,</b> aluminium stile section, plywood panel BFU 100G, phenolic resin coating and rot protection; lightweight, non-slip, easily stackable	IND	3	0.73 x 0.61	8.70	60	<b>3870.073</b>	
		IND	3	1.09 x 0.61	11.20	60	<b>3870.109</b>	
		IND	3	1.57 x 0.61	14.60	40	<b>3870.157</b>	
		IND	3	2.07 x 0.61	17.90	40	<b>3870.207</b>	
		IND	3	2.57 x 0.61	21.90	40	<b>3870.257</b>	
		IND	3	3.07 x 0.61	26.50	40	<b>3870.307</b>	
6	<b>O-robust access deck T9, 0.61 m wide</b> with integrated access ladder	IND	3	2.57 x 0.61	25.90	40	<b>3872.257</b>	
		IND	3	3.07 x 0.61	29.70	40	<b>3872.307</b>	
7	<b>O-corner deck</b> steel, for 0.36 m wide scaffolding		3	0.34 x 0.34	6.90	50	<b>2630.040</b>	
8	<b>Access ladder, T19</b> steel, 7 rungs			2.15 x 0.35	7.60	70	<b>4009.007</b>	
9	<b>O-access deck T9</b> aluminium, 0.61 m wide, easy access with aluminium deck surface and aluminium access hatch	IND	3	1.57 x 0.61	14.90	40	<b>3871.157</b>	
		IND	3	2.07 x 0.61	17.90	40	<b>3871.207</b>	
10	<b>O-access deck</b> aluminium, 0.61 m wide, with integrated access ladder	IND	3	2.57 x 0.61	26.50	40	<b>3874.257</b>	
11	<b>O-access deck, 1.00 m long</b> aluminium, 0.61 m wide	IND	3	1.00 x 0.61	10.00	40	<b>3871.100</b>	

## Steel plank, cover plates


The **steel plank 1** is a very safe bridging element capable of bearing high loads for all scaffolding systems. It is preferred to wooden planks for use in areas with stringent fire protection requirements.

- ▶ Long service life, reusable
- ▶ Lower weight compared with wooden planks
- ▶ Non-slip and non-flammable
- ▶ If at least 2 steel planks are adjacent to one another, they may also be used in brick guards

The support length must be at least 10 cm at every support.

i

Gerüstdielen aus Holz finden Sie in unserer Preisliste für Systemfreies Zubehör.

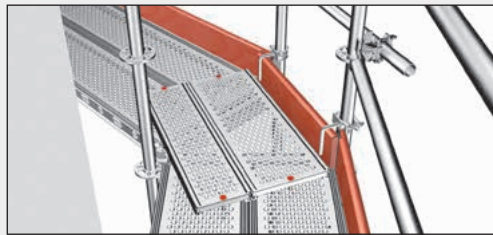


Every plank has to be secured at every bearing point with two locking pins against slipping and lifting-off. If **securing screws 3** are used, one screw per end is enough.

### Cover plates



The **cover plate 320 4** can be used between two scaffolding decks on SpeedyScaf and Allround Scaffolding. For use on openings widths up to 20 cm.

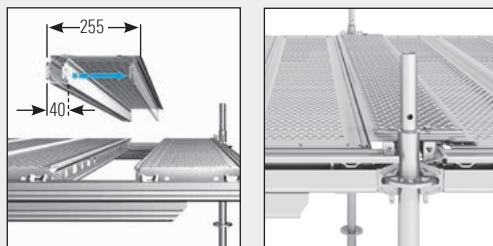


To create a completely closed deck surface, the **telescoping U-system deck 6** can be used. Even with mounted ledgers, it is possible to create a closed decking over the rosette.




### Spans of steel planks

plane bearing



punctual bearing





Maximum span  $L_s$  dependable on the used load class

	steel plank 300	steel plank 200
Load class 3	2.30 m**)	2.30 m**)
Load class 4	2.14 m	2.30 m**)
Load class 5	1.76 m	2.06 m
Load class 6	1.53 m	1.79 m

\*) statical span

\*\*\*) limited by the plank length and the minimum bearing width

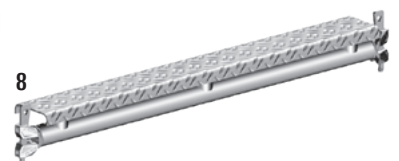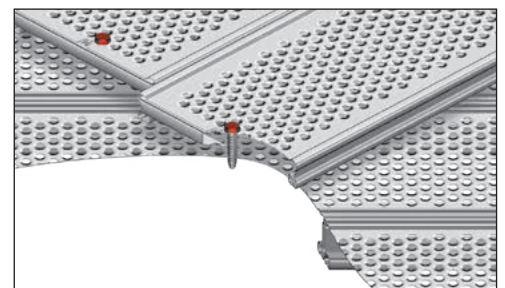



Pos.	Description	Use up to load class	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>Steel plank</b> 0.30 m, system-free, completely made of hot-dip galvanized steel	6		1.00 x 0.30	6.30	30	3880.100		
		6		1.50 x 0.30	9.30	30	3880.150		
		4		2.00 x 0.30	12.30	30	3880.200		
		3		2.50 x 0.30	15.30	30	3880.250		
	0.20 m, system-free, completely made of hot-dip galvanized steel	6		1.00 x 0.20	4.80	100	3878.100		
		6		1.50 x 0.20	7.20	100	3878.150		
		5		2.00 x 0.20	9.50	100	3878.200		
		4		2.50 x 0.20	11.80	100	3878.250		
2	<b>Locking pin for steel plank</b> d=11 mm, not for multiple use			0.08	0.50	100		3800.013	
3	<b>Securing screw</b> long (red), steel, galvanized, for securing of steel planks on steel decks	19		0.08 x 0.03	4.00	50		3800.016	
		22		0.08 x 0.03	3.90	50		3800.017	
	short (blue), steel, galvanized, for securing of cover plate 320 on steel decks	19		0.04 x 0.02	2.30	50		3800.018	
		22		0.04 x 0.02	2.30	50		3800.019	
4	<b>Cover plate 320, steel, 0.32 m</b> for 0.73 m bay length for 1.09 m bay length for 1.57 m bay length for 2.07 m bay length for 2.57 m bay length for 3.07 m bay length	6		0.73 x 0.32	2.60	150	3881.000		
		6		1.09 x 0.32	3.80	150	3881.001		
		6		1.57 x 0.32	4.20	100	3881.002		
		6		2.07 x 0.32	6.30	100	3881.003		
		6		2.57 x 0.32	8.50	100	3881.004		
		6		3.07 x 0.32	12.00	100	3881.005		
5	<b>Cover plate 320 with hooks, 0.32 m</b> for 1.57 m bay length for 2.07 m bay length for 2.57 m bay length for 3.07 m bay length	6		1.57 x 0.32	4.52	100	3882.157		
		6		2.07 x 0.32	6.62	100	3882.207		
		6		2.57 x 0.32	8.82	100	3882.257		
		6		3.07 x 0.32	12.32	100	3882.307		
6	<b>Telescoping U-system deck</b> closes openings from 40 to 255 mm, continuously adjustable	6		0.73	5.20	40	3881.073		
		6		1.09	7.80	40	3881.109		
		6		1.40	10.10	40	3881.140		
		6		1.57	11.40	40	3881.157		
		6		2.07	14.90	40	3881.207		
		5		2.57	18.60	40	3881.257		
		4		3.07	22.30	40	3881.307		
7	<b>U-deck 110</b> 0.11 m with wedge heads			0.73	4.50	150	2602.073		
				1.09	5.90	50	2602.109		
				1.40	6.90	50	2602.140		
				1.57	7.80	50	2602.157		
				2.07	8.50	50	2602.207		
				2.57	10.10	50	2602.257		
				3.07	13.50	50	2602.307		
8	<b>U-cover ledger 80 LW</b> for a closed decking on surface scaffolding with the stalu-deck 50			0.73 x 0.08	4.60	200	2677.073		
				1.09 x 0.08	6.70	50	2677.109		
				1.40 x 0.08	8.50	50	2677.140		
				1.57 x 0.08	9.50	50	2677.157		
				2.07 x 0.08	12.40	50	2677.207		
		2.57 x 0.08	15.40	50	2677.257				

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible

= new in the catalogue

## Toe boards

The **O-board bearer 1** is used to provide trip-proof decking surfaces with boards. For use of scaffolding boards see DIN 4420. Accesses with O-decks can also be provided.



The **U-ledger LW**, 0.73 m, 15° – 44°, WS 19 **3** permits low angles in large circular scaffolding structures.

The three-part side protection in the scaffolding bay and at the ends of the scaffolding is completed with **toe boards**. The fitting is positioned between vertical standard and wedge.


### Individual toe boards

From a minimum order quantity of 500 pcs. the toe boards can be individually designed in printing and painting. Further information can be found in the Layher Info "Layher Individual".



The **O-/U-steel toe board T18 6/7** reduces the fire risk. The offset fittings permit a closed transition from the deck to the toe board. It features high stiffness and is easy to stack.


The **O-/U-toe board, aluminium 8/9** is the lightweight alternative and can also be used in the case of special fire protection requirements.



Assembly of the wooden toe board



Assembly of the steel toe board



4



5



6



7




### Advantages:

- ▶ Reduction of fire risk
- ▶ High stiffness and sturdiness
- ▶ Easy stacking of the toe boards
- ▶ Closed transition between toe board and deck

8



9



10




Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>O-board bearer</b> steel			0.73	3.70	50	<b>2615.073</b>	
				1.09	4.60	50	<b>2615.109</b>	
				1.40	5.26	50	<b>2615.140</b>	
				1.57	7.40	50	<b>2615.157</b>	
				2.07	10.30	50	<b>2615.207</b>	
				2.57	12.50	50	<b>2615.257</b>	
				3.07	15.00	50	<b>2615.307</b>	
2	<b>U-board bearer</b> 0.73 m			0.73	3.60	50	<b>2615.000</b>	
3	<b>U-ledger LW</b> 0.73 m, 15° – 44°		19	0.73	3.60	100	<b>2618.000</b>	
4	<b>U-toe board, wood</b> for decks with U-insertion, for longitudinal and end sides			0.73 x 0.15	1.50	140	<b>2640.073</b>	
				1.09 x 0.15	2.50	140	<b>2640.109</b>	
				1.40 x 0.15	3.50	140	<b>2640.140</b>	
				1.57 x 0.15	3.50	140	<b>2640.157</b>	
				2.07 x 0.15	4.60	140	<b>2640.207</b>	
				2.57 x 0.15	5.70	140	<b>2640.257</b>	
				3.07 x 0.15	7.10	140	<b>2640.307</b>	
5	<b>O-toe board, wood</b> for decks with O-insertion, for longitudinal and end sides			0.73 x 0.15	1.50	140	<b>2642.073</b>	
				1.09 x 0.15	2.50	140	<b>2642.109</b>	
				1.40 x 0.15	3.40	140	<b>2642.140</b>	
				1.57 x 0.15	3.50	140	<b>2642.157</b>	
				2.07 x 0.15	4.30	140	<b>2642.207</b>	
				2.57 x 0.15	5.70	140	<b>2642.257</b>	
				3.07 x 0.15	6.30	140	<b>2642.307</b>	
6	<b>U-steel toe board T18</b> for decks with U-insertion, for longitudinal and end sides			0.73 x 0.15	1.80	280	<b>2644.073</b>	
				1.09 x 0.15	2.50	140	<b>2644.109</b>	
				1.40 x 0.15	3.10	140	<b>2644.140</b>	
				1.57 x 0.15	3.40	140	<b>2644.157</b>	
				2.07 x 0.15	4.40	140	<b>2644.207</b>	
				2.57 x 0.15	5.40	140	<b>2644.257</b>	
				3.07 x 0.15	6.30	140	<b>2644.307</b>	
7	<b>O-steel toe board T18</b> for decks with O-insertion, for longitudinal and end sides			0.73 x 0.15	1.70	280	<b>2643.073</b>	
				1.09 x 0.15	2.40	140	<b>2643.109</b>	
				1.40 x 0.15	3.00	140	<b>2643.140</b>	
				1.57 x 0.15	3.30	140	<b>2643.157</b>	
				2.07 x 0.15	4.30	140	<b>2643.207</b>	
				2.57 x 0.15	5.30	140	<b>2643.257</b>	
				3.07 x 0.15	6.20	140	<b>2643.307</b>	
8	<b>U-toe board, aluminium</b> for longitudinal and end sides, lightweight and durable			0.73 x 0.15	1.50	210	<b>2651.073</b>	
				1.09 x 0.15	2.20	210	<b>2651.109</b>	
				1.40 x 0.15	2.90	70	<b>2651.140</b>	
				1.57 x 0.15	3.10	210	<b>2651.157</b>	
				2.07 x 0.15	3.70	210	<b>2651.207</b>	
				2.57 x 0.15	4.70	210	<b>2651.257</b>	
				3.07 x 0.15	5.70	210	<b>2651.307</b>	
9	<b>O-toe board, aluminium</b> for longitudinal and end sides, lightweight and durable			0.73 x 0.15	1.50	210	<b>2641.073</b>	
				1.09 x 0.15	1.70	210	<b>2641.109</b>	
				1.40 x 0.15	2.90	70	<b>2641.140</b>	
				1.57 x 0.15	3.10	210	<b>2641.157</b>	
				2.07 x 0.15	3.25	210	<b>2641.207</b>	
				2.57 x 0.15	4.10	210	<b>2641.257</b>	
				3.07 x 0.15	4.90	210	<b>2641.307</b>	
10	<b>Half-coupler with toe board pin</b>		19		1.00	25	<b>4708.019</b>	
			22		1.00	25	<b>4708.022</b>	


WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible

= new in the catalogue





The **wedge-head coupler** serves to connect  $d=48.3$  mm scaffolding tubes to the rosettes of the standards.



The twin **wedge coupler** is for connecting several standards to each other, e.g. for combining standards in support scaffolding construction.

**Scaffolding couplers 2–5** connections, in steel, drop-forged; as per DIN EN 74-1. Tightening torque of collar nuts 50 Nm.

Further scaffolding couplers can be found in the catalogue for System-free Accessories

Scaffolding must be anchored vertically to and parallel with the facade with resistance to both tensile and compressive stress. The **Allround wall tie**, 0.80 m **7** must be secured with a standard coupler to the standard and supported with the fork plate on the U-section of the transverse ledger.

1



2 / 3



4 / 5



For right-angled connection of tubes with  $d=48.3$  mm.

For connection at any angle of tubes with  $d=48.3$  mm.

6



7



8



9



10




Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Wedge-head coupler</b>						
	rigid	19		1.10	25	2628.019	
		22		1.10	25	2628.022	
	swivelling	19		1.50	25	2629.019	
		22		1.50	25	2629.022	
	twin			1.20	25	2629.000	
2	<b>Double coupler</b> EN 74-1, class BB, C3, M (quality-monitored), for use on steel and aluminium tube	19		1.30	25	4700.019	
		22		1.30	25	4700.022	
3	<b>Rapid double coupler</b> Description as 4700.xxx, acc. to approval Z-8.331-947	19		1.30	25	4777.019	
		22		1.30	25	4777.022	
4	<b>Swivel coupler</b> EN 74-1, class B, C3, M (quality-monitored), for use on steel and aluminium tube	19		1.50	25	4702.019	
		22		1.50	25	4702.022	
5	<b>Rapid swivel coupler</b> Description as 4702.xxx, acc. to approval Z-8.331-947	19		1.50	25	4778.019	
		22		1.50	25	4778.022	
6	<b>Allround rosette cover</b>						
	with connected ledger polyethylene, fixing with disposable tie			0.70	10	4007.012	
	without connected ledger polyethylene, fixing with disposable tie			0.90	10	4007.013	
7	<b>Allround wall tie</b> 0.80 m			0.80	3.30	100	2639.080
8	<b>Wall tie</b>			0.20	0.90	250	1754.020
				0.38	1.60	250	1754.038
				0.69	2.80	50	1754.069
				0.95	3.70	50	1754.095
				1.45	5.70	50	1754.145
				1.75	5.80	50	1754.175
9	<b>Plastic wall insert</b> plastic, drilled hole d=14 mm			70 mm	0.25	25	4008.072
				100 mm	0.25	25	4008.102
				135 mm	0.25	25	4008.137
10	<b>Ring screw</b> steel, galvanized, d=12 mm, for expanding plug			95 mm	1.60	10	4009.097
				120 mm	1.80	10	4009.122
				190 mm	2.50	10	4009.192
				230 mm	3.00	10	4009.232
				300 mm	3.50	10	4009.302
				350 mm	5.00	10	4009.352


## Brackets

Widening of scaffolding can be easily performed by fitting **brackets** in the rosette on the standard. System decks in brackets must be secured against lifting off with the **lift-off preventer** (page 19).


Widened scaffolding can also be constructed with O-ledgers or U-transverse ledgers, base collar and diagonal braces in any projection depending on the working load. Structural strength verification is required here for each individual case.

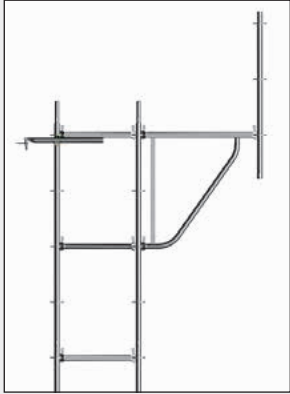


The **bracket LW**, 1.09 m wide **6** is used for widening birdcage scaffolding. Transverse ledger at the height of the lower bracket connection is required. Permissible load capacity: 2.0 kN/m<sup>2</sup> for bay widths 3.07 m.

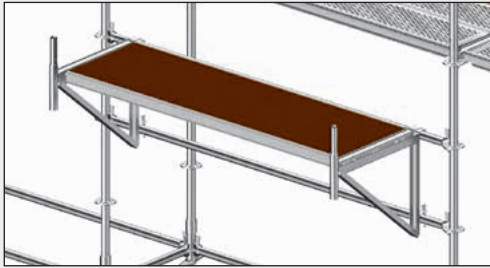

**U-bracket**, with 2 hooks **2**, suspended from the ledgers, for projecting platforms.




The **bracket brace** 2.05 m **3** is used to support the 0.73 m bracket.




The **U-extension bracket** **4** is used for quick conversion during construction, e.g. when installing external thermal insulation compound systems. It is simply plugged onto the spigot of Allround brackets. No tools are required.

The **O-bracket**, 0.69 m wide, adjustable **6d** is used incrementally and facilitates optimum stand height and wall distance.

Original Allround Scaffolding from Layher is made up of more than just standards and ledgers: complete system technology with additional parts and accessories to suit the construction site provides for safety and assembly benefits at all sites. System brackets are available for quickly widening scaffolding bays and for converting projecting building parts and eaves.

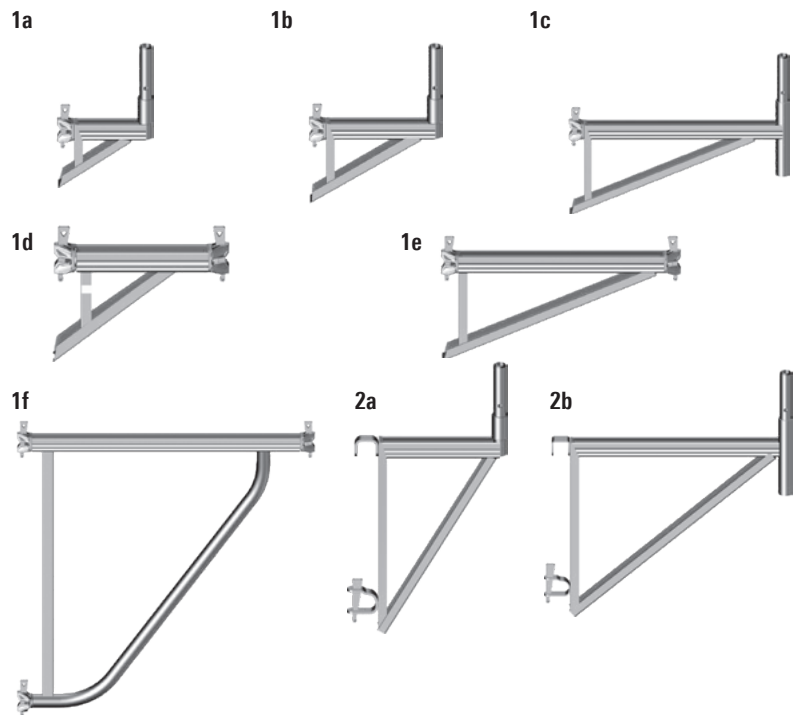

**U-lift-off-preventers** or **Universal U-lift-off-preventers** can be used for all U-console brackets.

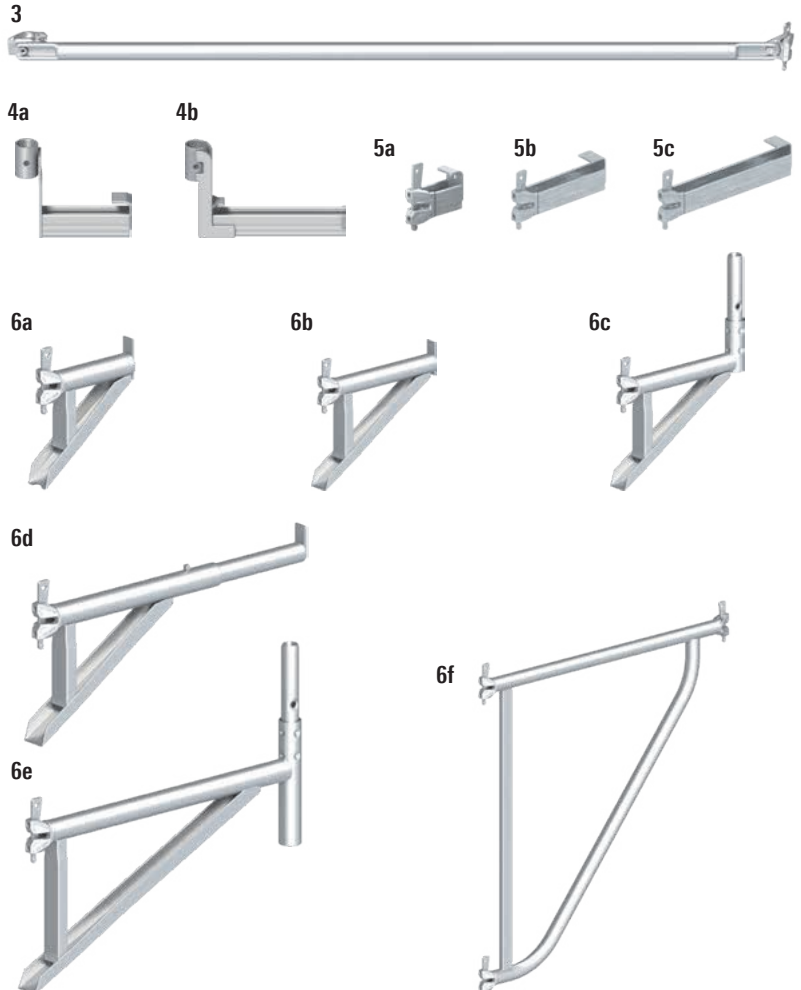




Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>U-console bracket LW</b>				
	a) 0.28 m wide, for U-deck 0.19 m wide, lift-off preventer provided by customer	0.28	3.40	100	<b>2632.019</b>
	b) 0.39 m wide, for U-deck 0.32 m wide	0.39	3.90	125	<b>2632.039</b>
	c) 0.73 m wide, for 2 U-decks 0.32 m or 1 U-deck 0.61 m wide	0.73	6.40	80	<b>2632.073</b>
	d) 0.45 m wide, with 2 wedge heads for U-decks, 0.32 m wide	0.45	3.10	80	<b>2632.045</b>
	e) 0.73 m wide, with 2 wedge heads for U-decks, 2 x 0.32 m wide or 1 x 0.61 m	0.73	5.00	80	<b>2632.074</b>
f) 1.09 m wide, with U-section, for 3 U-decks 0.32 m wide	1.09	12.00	30	<b>2632.109</b>	
2	<b>U-console bracket</b>				
	a) with 2 hooks, 0.36 m wide, for U-decks, 0.32 m wide	0.36	6.60	80	<b>4005.036</b>
	b) with 2 hooks, 0.73 m wide, for U-decks, 2 x 0.32 m or 1 x 0.61 m wide	0.73	8.50	40	<b>4005.073</b>
3	<b>Bracket brace</b> 2.05 m	2.05	8.80	50	<b>2631.205</b>
4	<b>U-extension bracket</b>				
	a) 0.19 m wide, for U-deck 0.19 m wide, with tilting preventer	0.19	1.57	125	<b>2632.001</b>
	b) 0.32 m wide, for U-deck 0.32 m wide, with tilting preventer	0.32	2.11	125	<b>2632.002</b>
5	<b>U-ledger bracket with 1 wedge head</b>				
	a) for widening the working space between scaffolding and wall	0.14	1.00	500	<b>2618.014</b>
	b) 0.26 m wide, for U-deck 0.19 m wide, with tilting preventer	0.26	1.40	500	<b>2618.026</b>
	c) 0.38 m wide, for U-deck 0.32 m wide, with tilting preventer	0.38	1.50	300	<b>2618.038</b>
6	<b>O-console bracket</b>				
	a) 0.26 m wide, without spigot, for O-deck 0.19 m wide	0.26	2.30	250	<b>2631.026</b>
	b) 0.36 m wide, without spigot, for O-deck 0.32 m wide	0.36	3.40	125	<b>2630.038</b>
	c) 0.39 m wide, for O-deck 0.32 m wide	0.39	3.90	125	<b>2631.039</b>
	d) 0.69 m wide, adjustable pushed in: for accommodating 2 x 0.19 m O-steel decks T4 pulled out: for accommodating 3 x 0.19 m O-steel decks T4	0.69	4.20	125	<b>2630.069</b>
	e) 0.73 m wide, for 2 O-decks 0.32 m or 1 O-deck 0.61 m wide	0.73	6.80	80	<b>2631.073</b>
f) 1.09 m wide, for 3 O-decks 0.32 m wide	1.09	12.00	30	<b>2631.109</b>	



Assembly situation: **U-console bracket LW**, 0.73 m wide **1c** (top) or alternatively **U-ledger** 0.73 m in conjunction with **bracket brace** 2.05 m **3** (left).



**O-/U-cover ledgers 110 LW**, 0.11 m wide are available in a variety of lengths for fully closed deckings between main scaffolding decks and console bracket decks.

## Pedestrian protection, roof edge protection, scaffolding enclosure

The **U-walkway beam LW 1** is designed for further construction with 0.73 m or 1.09 m wide scaffolding. Additional bracing is required for constructing pedestrian passages.



The heightened side protection specified for roofing work is swiftly assembled in Allround Scaffolding: The **side protection nets** are attached at the top, at scaffolding deck height, to the O-ledger. Without a quick strap fastener, the protection net is threaded with each loop of its mesh into the O-ledgers. With quick strap fasteners, the side protection net is attached to the O-ledgers at every 750 mm. Toe board and handrail are required.

Side protection net 10.00 x 2.00 m,  
Specification: Mesh width 100 mm, blue, made of PPM 4.5 mm, knotless, as per DIN EN 1263-1.


### Scaffolding tarpaulins and nets

To protect passers-by and traffic during spraying work and other site work causing dirt, facade scaffolding is covered with tarpaulins and nets.


Layher scaffolding tarpaulins and nets meet the requirements of DIN 4420-1. Compliance with design parameters prevents objects falling from the scaffolding level.

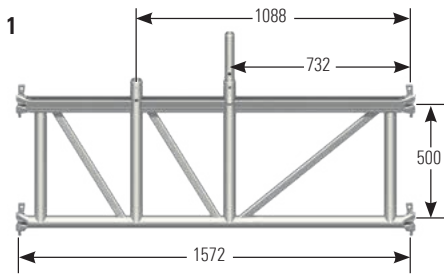

Scaffolding tarpaulin



Scaffolding net

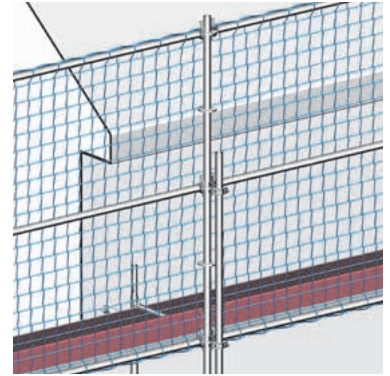

Roof edge protection




Scaffolding tarpaulins and nets you'll find in the catalogue System-free Accessories.




### Protection net 2

The nets are attached at the bottom (at scaffolding deck height) and at the top (2 m above the scaffolding deck) to the tubes at every 750 mm. Toe board and handrail are required.

Side protection net 10.00 x 2.00 m, Specification: Mesh width 100 mm, blue, made of PPM 4.5 mm, knotless, as per DIN EN 1263-1.

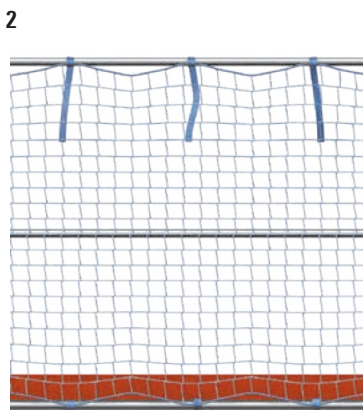



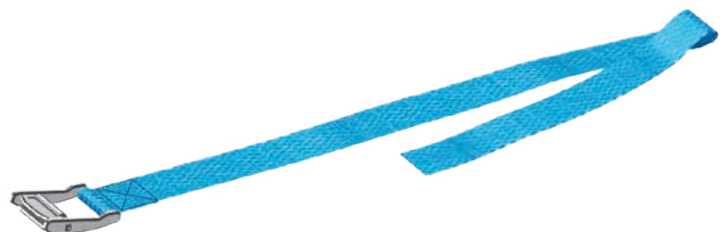



3



Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>U-walkway beam LW</b> 1.57 m wide, steel up to load class 4, up to bay length 3.07 m and load class 4: max. assembly height 14 m	1.57 x 0.50	20.90	25	2666.157 
2	<b>Protection net</b> with quick strap fastener	10.00 x 2.00	5.90	40	6232.002
3	<b>Quick strap fastener</b>	0.50	1.50	50 	6235.002



U-walkway beam

WS = wrench size PU = packaging unit  = available ex works  = delivery time on request  = only available in this packaging unit  = the approval process is not yet completed  = Layher Individual possible  
 = new in the catalogue




## Platform stairway, comfort stairway








Safe, fatigue-free stairway ascent – also with transportation of materials – without impairment of the working surface. With the **platform stairway 1/2**, it is simple to construct a 4-standard stairtower, either integrated into the scaffolding or as a free-standing access structure anchored on the building. Both parallel and opposite stairways are possible here. There is no hindrance to work on scaffolding with this version. Permissible load capacity: 2.0 or 2.5 kN/m<sup>2</sup>.

The **comfort stairway 3/4** bases on the platform stairway. It is equipped with 175 mm wide, grooved steps. That leads to more comfortable access – especially for high access heights. The stronger stringer profile offers only small bending guardrails, internal guardrails and stairwell guardrails can be used from the platform stairway.



The **internal stairway guardrail T12 8** is required for opposite stairways and serves to increase the stability of single-flight stairways.

The **stair guardrail post 10** with the **O-ledger with wedge head and U-fork 11** is used for the stairwell at the top level. Optionally the exit of the top stair level can be assembled with console brackets. In that case, the stairwell guardrail is not needed.

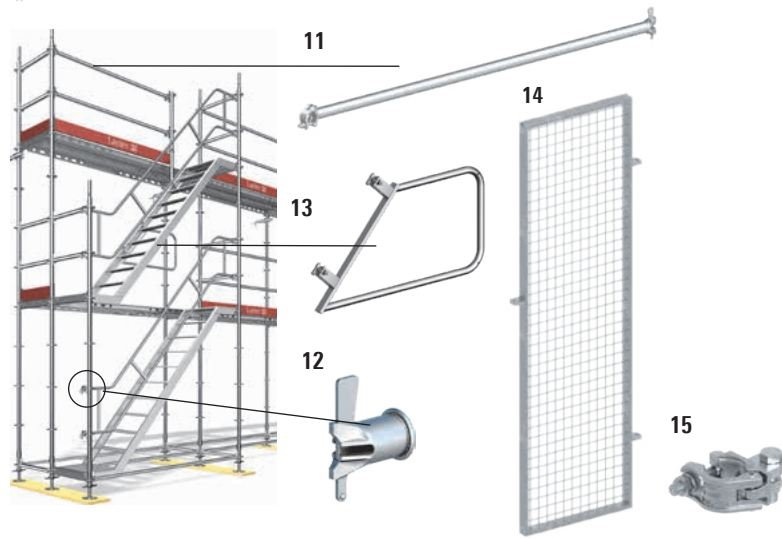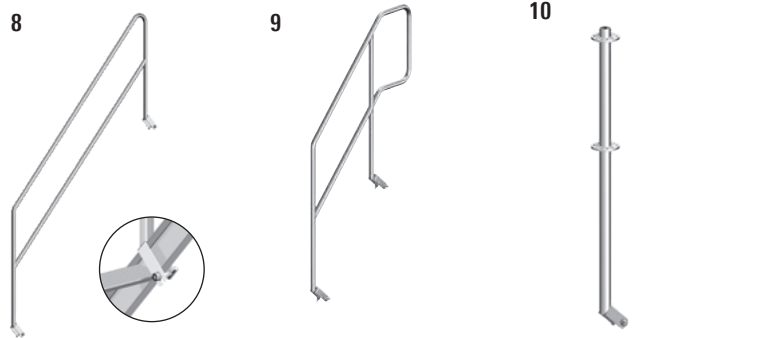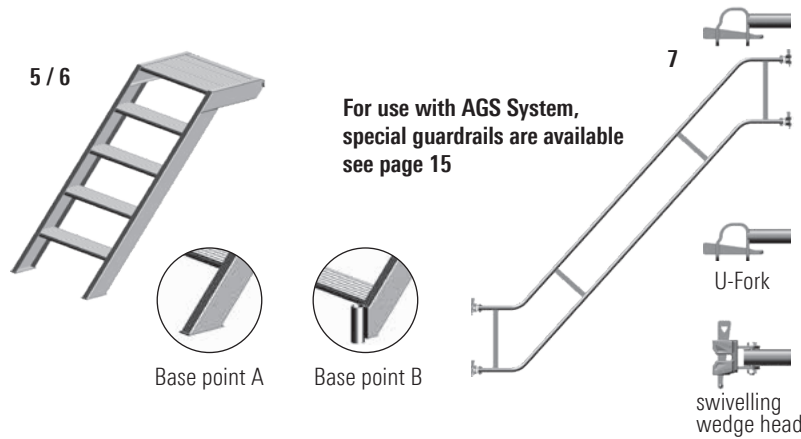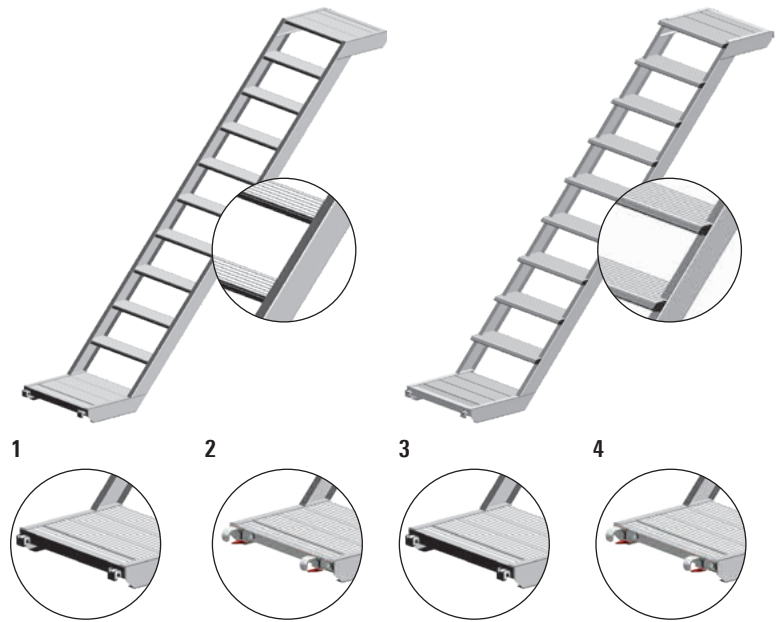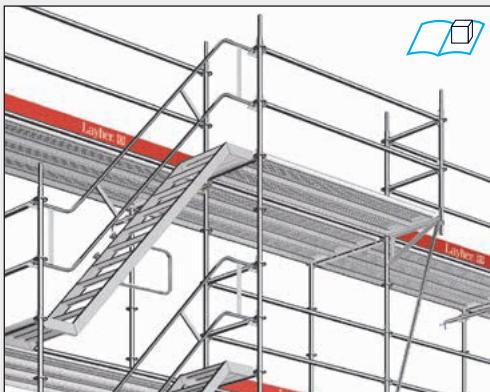

Pos.	Description	WS [mm]	Maße L / H x B [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>U-platform stairway, aluminium, stair class A acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, for 2.57 m bay length, step height 0.20 m	Ⓞ	2.57 x 0.64	21.90	10	1753.257	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, for 3.07 m bay length, step height 0.20 m	Ⓞ	3.07 x 0.64	26.30	10	1753.307	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.50 m high, for 2.57 m bay length, step height 0.18 m	Ⓞ	2.57 x 0.64	21.50	10	1753.251	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 2.00 m high, for 2.57 m bay length, step height 0.20 m	Ⓞ	2.57 x 0.94	33.70	10	1753.258	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 2.00 m high, for 3.07 m bay length, step height 0.20 m	Ⓞ	3.07 x 0.94	40.10	10	1753.308	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 1.50 m high, for 2.57 m bay length, step height 0.18 m	Ⓞ	2.57 x 0.94	36.60	10	1753.252	
2	<b>O-platform stairway, aluminium, stair class A acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, for 2.57 m bay length, step height 0.20 m	Ⓞ	2.57 x 0.64	23.20	10	2633.257	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, for 3.07 m bay length, step height 0.20 m	Ⓞ	3.07 x 0.64	27.70	10	2633.307	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.50 m high, for 2.57 m bay length, step height 0.18 m	Ⓞ	2.57 x 0.64	22.80	10	2633.258	
3	<b>U-comfort stairway, aluminium, stair class B acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, für 2.57 m bay length, step height 0.22 m	Ⓞ	2.57 x 0.64	27.00	10	1755.257	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, für 3.07 m bay length, step height 0.22 m	Ⓞ	3.07 x 0.64	32.00	10	1755.307	
	0.94 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, für 2.57 m bay length, step height 0.22 m	Ⓞ	2.57 x 0.94	37.00	10	1755.258	
4	<b>O-comfort stairway, aluminium, stair class B acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 2.00 m high, für 2.57 m bay length, step height 0.22 m	Ⓞ	2.57 x 0.64	29.20	10	2635.257	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 2.00 m high, für 2.57 m bay length, step height 0.22 m	Ⓞ	2.57 x 0.94	39.10	10	2635.258	
5	<b>U-starting stairway, aluminium, stair class A acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.00 m high, step height 0.20 m, base point A	Ⓞ	1.00 x 0.64	11.50	10	1753.003	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.20 m high, step height 0.20 m, base point B	Ⓞ	1.20 x 0.64	13.50	10	1753.002	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.70 m high, step height 0.19 m, base point B	Ⓞ	1.70 x 0.64	18.30	10	1753.004	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 1.00 m high, step height 0.20 m, base point A	Ⓞ	1.00 x 0.94	16.80	10	1753.005	
	0.94 m wide, 2.0 kN / m <sup>2</sup> , 1.20 m high, step height 0.20 m, base point B	Ⓞ	1.20 x 0.94	17.60	10	1753.006	
6	<b>O-starting stairway, aluminium, stair class A acc. to EN 12811-1</b>						
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.00 m high, step height 0.20 m, base point A	Ⓞ	1.00 x 0.64	13.80	10	2633.003	
	0.64 m wide, 2.5 kN / m <sup>2</sup> , 1.20 m high, step height 0.20 m, base point B	Ⓞ	1.20 x 0.64	15.30	10	2633.002	
7	<b>Stairway guardrail, steel galvanized</b>						
	2.00 m high, for 2.57 m bay length with U-fork	Ⓞ	2.57	18.10	30	2638.257	
	2.00 m high, for 3.07 m bay length with U-fork	Ⓞ	3.07	20.10	30	2638.307	
	2.00 m high, for 2.57 m bay length with swivelling wedge head	Ⓞ	2.57	18.10	30	2638.258	
	2.00 m high, for 3.07 m bay length with swivelling wedge head	Ⓞ	3.07	20.10	30	2638.308	
	1.50 m high, for 2.57 m bay length with U-fork	Ⓞ	2.57	17.00	30	2638.251	
	1.50 m high, for 2.57 m bay length with swivelling wedge head	Ⓞ	2.57	17.00	30	2638.252	
8	<b>Internal stairway guardrail T12</b>						
	for 2.57 x 2.00 m bay length and 2.07 x 2.00 m bay length	19	2.25	13.50	20	1752.007	
		22	2.25	13.50	20	1752.008	
	for 2.57 x 1.50 m bay length	19	2.00	11.50	20	1752.012	
	1.00 m high	19	0.90	7.80	20	1752.011	
9	<b>Initial stairway guardrail</b>	19	0.90 x 1.70	9.90	20	1752.009	
		22	0.90 x 1.70	9.90	20	1752.013	
10	<b>Stair guardrail post</b> is used for the stairwell at the top level	19	1.30	6.10	28	2638.400	
11	<b>O-ledger with wedge head and U-fork</b>						
	for 2.57 m bay length, is used for the stairwell at the top level	19	1.90	7.80	50	2638.401	
	for 3.07 m bay length, is used for the stairwell at the top level	19	2.15	9.70	50	2638.402	
12	<b>Stairway guardrail adapter</b>			0.70	450	2637.000	
13	<b>Stairwell guardrail</b>	19		6.20	40	1752.004	
		22		6.20	40	1752.014	
14	<b>Door lockable</b> <small>new</small>		1.96 x 0.77	14.97	20	4780.732	
15	<b>Half coupler with hanger for door</b> <small>new</small>	19		1.24	250	4710.019	

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible  
 = new in the catalogue

## Modular stairway, outside access, construction staitower 200

With the **modular stairway**, accesses that always fit and that match the system can be constructed. Any intermediate dimension can be achieved simply by fitting together the individual stairway parts. The stairway rises 20 cm from step to step, and the bottom element with spindles is used for precise levelling. A wide variety of applications thanks to modular design. Little space needed for transport and assembly.

Height differences from 0.60 m to 1.60 m can be bridged. Load-bearing capacity: 3.0 kN/m<sup>2</sup>. Design: steel, hot-dip galvanized. Connection of elements with **bolt d=12 x 55 mm** and **safety clip d=2.8 mm** (2 per joint). (They are already included in the scope of delivery).

Constructing outward-facing access bays requires simple **scaffolding ladders 4/5** together with the **swing door 7** and the **guardrail standard, 1.70 m, bended 8**.



Layher pole ladders for scaffolding conform to DIN EN 131 individually or when connected to each other. The stile connections must have proper support and be secured with spring clips. The regulations in DGUV 38 must be followed.


Stairtowers can be used in many areas outside scaffolding construction, e.g. in public areas and as escape stairtowers.

The **U-/O-stairway stringer 200**, 10-step **9** and the **platform stairway, aluminium** (see page 38) are not just a quick and comfortable means of upward access which permits problem-free vertical transportation of materials and working on all scaffolding levels, they also easily enable stairtowers of differing widths and load capacities to be built for the purpose of rapidly linking up various construction site levels.

U-/O-stairway stringer 200		
	10 steps	Permissible load with a stair flight width of 1.29 m
Riser s	20.0 cm	2.0 kN/m <sup>2</sup>
Tread a	24.1 cm	
Undercut u	7.9 cm	



Installation situation of Allround O-side part 0.75 m

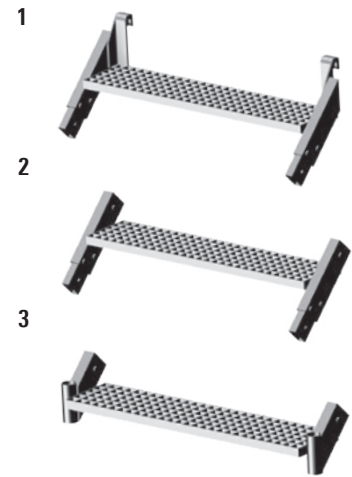


4/5



7



9/10

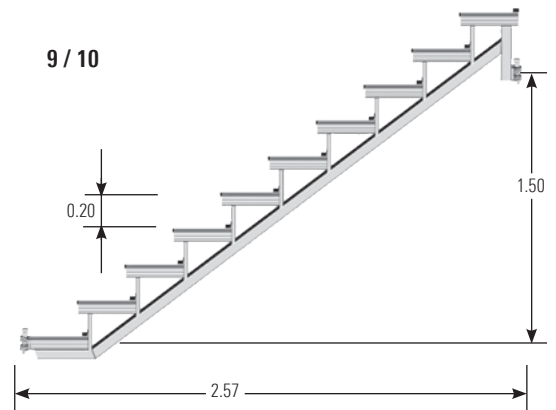

8



12



13





















11



Locks the deck, which bears in the stringers against lift-off.





Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>U-stair head section</b> Spigot preassembled with bolts and safety clips			0.60	10.70	15	2637.060
				0.95	11.70	50	2637.095 
2	<b>Stair middle section</b> Spigot preassembled with bolts and safety clips			0.60	9.20	15	2638.060
				0.95	10.20	50	2638.095 
3	<b>Stair foot section</b>			0.60	6.80	15	2639.060
				0.95	7.80	50	2639.095 
4	<b>Aluminium pole ladder</b> extendable, with 10 rungs						
				2.90 x 0.46	8.20	50	1004.010
				4.00 x 0.46	11.30	50	1004.014
				4.90 x 0.46	13.80	50	1004.017
		5.70 x 0.46	16.10	50	1004.020		
5	<b>Steel pole ladder</b> extendable, with 6 rungs						
				1.50 x 0.43	12.00	50	1002.006 
				2.00 x 0.43	15.00	50	1002.008 
				3.00 x 0.43	21.50	50	1002.012 
		4.00 x 0.43	28.00	50	1002.016 		
6	<b>Spring clip</b> 11 mm pin, for securing the joint connections				0.10	20	1250.000
7	<b>Swing door</b>			0.73	7.79	40	2627.073 
				1.00	9.16	40	2627.100 
8	<b>Guardrail standard</b> 1.70 m, bended			1.70	8.50	50	2606.170 
9	<b>U-stairway stringer 200</b> 10-step, 2.00 m storey height			2.00 x 2.57	28.40	20	2639.010 
10	<b>O-stairway stringer 200 LW</b> 10-step, 2.00 m storey height			2.00 x 2.57	28.40	20	2638.011 
11	<b>Lift-off prevention clamp</b>				1.00	20 	2634.032 
12	<b>O-side part</b> 0.75 m	22	0.75 x 1.00	11.90	30		2627.015 
		19	0.75 x 1.00	11.90	25		2627.017 
13	<b>U-side part</b> 0,75 m	22	0.75 x 1.00	11.20	30		2627.016 
		19	0.75 x 1.00	11.20	25		2627.018 

In the 12-standard construction staitower 200, the stairways are made up of individual **U-/O-stairway stringers 200**, 10-step and steps made of standard decks. Thus the weights/volumes of the individual parts are lower, the proportions of standard material higher, and the additional costs lower. In addition, different variants of stairway widths are possible.



## Stairtowers 500 and 750

Separate stringers and standard decking ensure variable widths for the stairway (1.09 m, 1.57 m, 2.07 m). This keeps the weight and the volume of the components low and permits a high proportion of standard Layher Allround material to be used.

The 16-standard ground plan of the stairtowers 500 and 750 allows both temporary and stationary stairtower structures of high loading capacity to be built.



The stairtower 500 is used for preference in non-public areas, e.g. as access to the construction site, as non-public road crossings during construction work or as additional escape stairtower. In special cases it also can be used in public areas.

### U-/O-stairway stringer 500

	9 steps	5 steps (U-version)	Permissible load with a stair flight width of 2.07 m	
Riser s	20.0 cm	20.0 cm		5.0 kN/m <sup>2</sup>
Tread a	27.5 cm	29.0 cm		
Under-cut u	4.5 cm	3.0 cm		



The stairtower 750 with child protected guardrail is thanks to its riser measures mainly used in public areas and event constructions as access to stages and grandstands. Its features are the high load-bearing capacity and the reduced stairway riser.


### U-stairway stringer 750

	8 steps	5 steps	2 steps	Permissible load with a stair flight width of 2.07 m	
Riser s	16.6 cm	16.7 cm	16.7 cm		7.5 kN/m <sup>2</sup>
Tread a	31.0 cm	29.0 cm	32.7 cm		
Under-cut u	1.0 cm	3.0 cm	-0.7 cm		


A height adjustment outside the 2.00 m or 1.50 m standard dimension is achieved with 5-step stairway stringers (1.00 m high). Alternatively, the stairway stringers 500 and 750 can also be combined in the stairtower structure, while the riser needs to be constant within one storey stairway.

The stairtower structures must be verified for each single structure as regards structural strength.


1 / 2

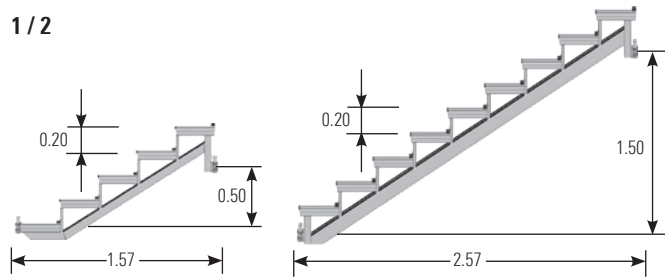


3

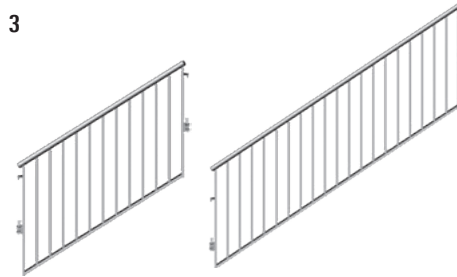

4 / 5

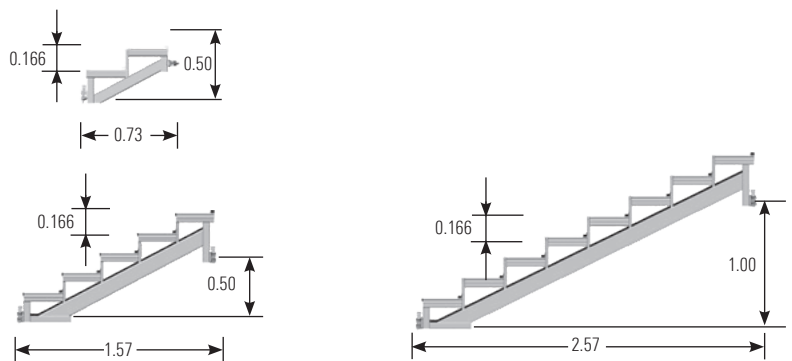


6

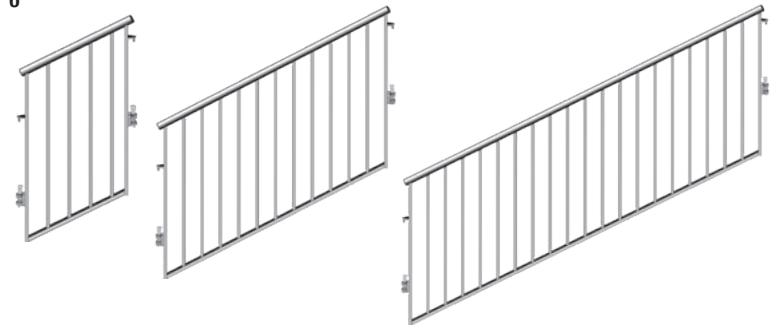

7



8 / 9

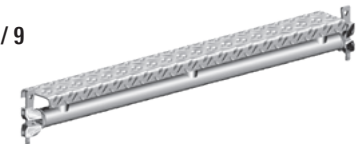

The deck ledger 110 LW is needed at the start and end of a stairway to an intermediate landing (in conjunction with U-steel decks).



10



11



Pos.	Description	Use up to load class	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>U-stairway stringer 500 LW</b> 5 steps (1.00 m storey height)		1.00 x 1.57	18.00	20	<b>2639.004</b>	
			2.00 x 2.57	34.00	20	<b>2639.009</b>	
2	<b>O-stairway stringer 500 LW</b> 9 steps (2.00 m storey height)		2.00 x 2.57	36.00	20	<b>2638.012</b>	
3	<b>Guardrail for stairs 500 T12</b> 5 steps (1.00 m storey height)		1.00 x 1.57	24.80	25	<b>2616.104</b>	
			2.00 x 2.57	35.80	25	<b>2616.100</b>	
4	<b>U-stairway stringer 750 LW</b> 2 steps (0.50 m storey height)		0.50 x 0.73	8.90	20	<b>2639.002</b>	
			1.00 x 1.57	19.20	20	<b>2639.005</b>	
			1.50 x 2.57	36.40	20	<b>2639.008</b>	
5	<b>O-stairway stringer 750 LW</b> 2 steps (0.50 m storey height)		0.50 x 0.73	10.80	20	<b>2638.013</b>	
			1.00 x 1.57	19.90	20	<b>2638.014</b>	
			1.50 x 2.57	37.20	20	<b>2638.015</b>	
6	<b>Guardrail for stairs 750 with child protection</b> 2 steps (0.50 m storey height)		0.50 x 0.73	14.80	25	<b>2616.110</b>	
			1.00 x 1.57	24.30	25	<b>2616.105</b>	
			1.50 x 2.57	34.60	25	<b>2616.101</b>	
7	<b>Guardrail T12 with child protection</b>		0.45	10.40	25	<b>2616.045</b>	
			0.73	14.10	25	<b>2616.073</b>	
			1.09	17.80	25	<b>2616.109</b>	
			1.29	19.40	25	<b>2616.129</b>	
			1.40	20.60	25	<b>2616.140</b>	
			1.57	22.70	25	<b>2616.157</b>	
			2.07	27.70	25	<b>2616.207</b>	
8	<b>U-cover ledger 110 LW</b> 0.11 m width		0.73	5.20	200	<b>2675.073</b>	
			1.09	7.60	50	<b>2675.109</b>	
			1.29	8.90	50	<b>2675.129</b>	
			1.40	9.70	50	<b>2675.140</b>	
			1.57	10.80	50	<b>2675.157</b>	
			2.07	14.20	50	<b>2675.207</b>	
			2.57	17.60	50	<b>2675.257</b>	
9	<b>O-cover ledger 110 LW</b> 0.11 m width		0.73	5.20	200	<b>2675.074</b>	
			1.09	7.50	50	<b>2675.110</b>	
			1.29	9.00	50	<b>2675.130</b>	
			1.40	9.40	50	<b>2675.141</b>	
			1.57	11.00	50	<b>2675.158</b>	
			2.07	14.10	50	<b>2675.208</b>	
			2.57	18.10	50	<b>2675.258</b>	
10	<b>U-transition deck 154 with claws</b>	3	1.09	5.00	50	<b>3868.109</b>	
		3	1.29	6.00	50	<b>3868.129</b>	
		3	1.40	6.50	60	<b>3868.140</b>	
		3	1.57	7.30	50	<b>3868.157</b>	
		3	2.07	9.70	50	<b>3868.207</b>	
11	<b>Guardrail fixing device</b>			0.80	250	<b>2636.000</b>	

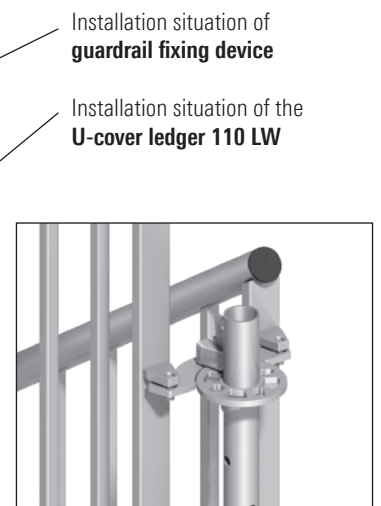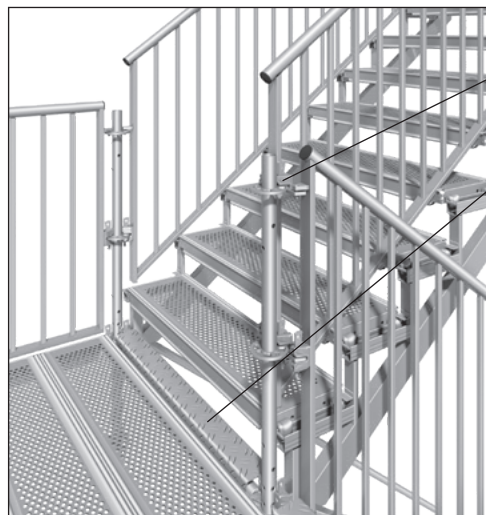





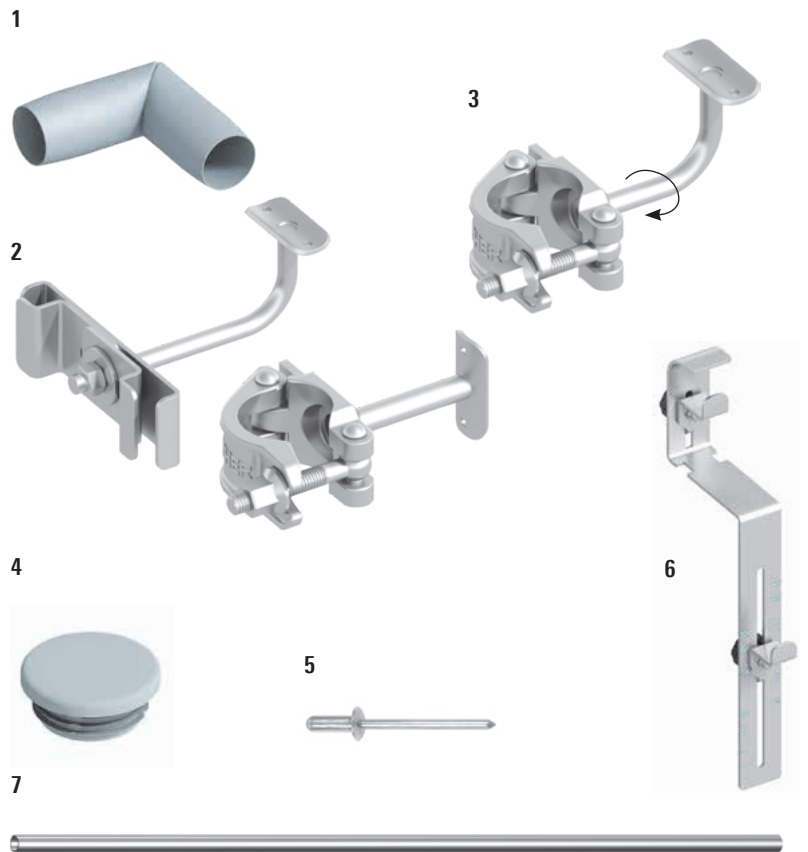
## System handrail

Stairtowers, wheelchair ramps or bridges open to the public must, to conform to German state building regulations, be provided with continuous handrails. With the system handrail, complex one-off designs and assembly work can be avoided. With just three parts – handrail holder, joint and handrail tube – the guardrail can be installed quickly and easily in line with regulations for every stair type. The lightweight aluminium handrail tubes of  $d=42.3$  mm for a comfortable grip are easy to cut and drill holes into, and also quick to clean. They are simply riveted to the fitted handrail holders.

With rotating joints that permit any angle between  $90^\circ$  and  $180^\circ$  to be set and used, all transitions between the handrail tubes are smooth and pleasant to the touch.

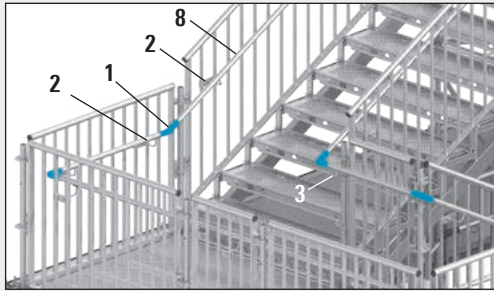


 For information about the assembly, see the **instructions for assembly and use for the system handrail**.




## Step cover

Sure footing with **Layher step covers**. With their non-slip surface using quartz sand, they ensure maximum safety on Layher stairways in rain, snow and ice conditions. The step covers are made from glass-fibre-reinforced plastic. They are permanently resistant to weather effects, easy to clean, electrically non-conductive and flame-retardant. They can be fitted quickly and are optimally matched to the Layher stairway range.



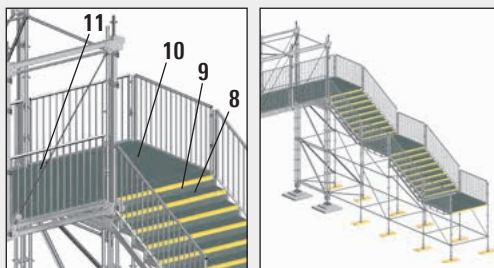

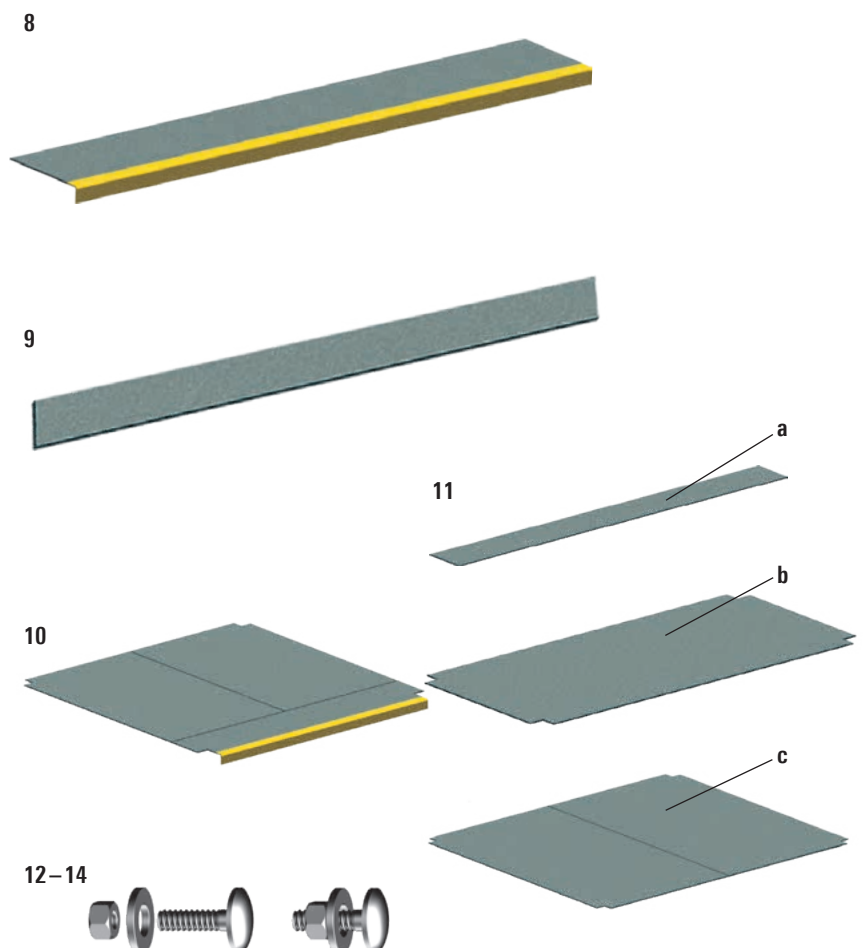

A dependable solution for safe footing in all weather conditions.



The risers and the step covers correspond to the non-slip value R13 according to DIN EN 51130.




Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>Joint for system handrail, 10 pcs.</b> infinitely adjustable from 90 to 180°			1.00	10	2616.007
2	<b>System handrail holder</b> for child safety guardrail	19		0.68	200	2616.001
	with half-coupler, vertical	19		0.94	500	2616.004
3	<b>System handrail holder</b> with half-coupler	19		1.00	200	2616.008
4	<b>End caps for system handrail tube, plastic, 10 pcs.</b>			0.01	10	2616.009
5	<b>Blind rivet 4.8 x 12, 100 pcs.</b> for fastening the handrail tubes to the handrail holder			0.50	100	6493.357
6	<b>Assembly aid for system handrail</b>			1.15	200	2616.005
7	<b>System handrail tube, aluminium, d=42.3 mm, 6.00 m</b>			4.34	138	2616.003
8	<b>Step cover</b> necessary fixation material: each 3 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 0.33	3.20	20	4000.157
			2.07 x 0.33	4.20	20	4000.207
9	<b>Riser</b> necessary fixation material: each 2 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 0.16	1.60	20	4001.157
			2.07 x 0.16	2.00	20	4001.207
10	<b>Landing cover with nose</b> with nose, for adjacent stair, necessary fixation material: each 21 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 1.57	15.30	20	4002.157
			2.07 x 2.07	26.60	20	4002.207
11	<b>Landing cover</b> a) flat, for use in intermediate bay, necessary fixation material: each 2 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 0.15	1.50	20	4003.015
			2.07 x 0.15	2.00	20	4003.016
	b) flat, for use in intermediate bay, necessary fixation material: each 6 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 0.73	7.10	20	4003.073
			2.07 x 0.73	9.40	20	4003.074
	c) flat, for use on platforms, necessary fixation material: each 18 pcs. (of PU 50 pcs.) 6495.069, 6494.580 und 6495.070		1.57 x 1.57	15.30	20	4003.157
			2.07 x 2.07	26.60	20	4003.207
12	<b>Countersunk bolt M8 x 30</b>	5		0.60	50	6495.069
13	<b>Securing nut M8</b>			0.20	50	6494.580
14	<b>Spring washer A 8.4 x 18 mm</b>			0.30	50	6495.070



WS = wrench size PU = packaging unit  = available ex works  = delivery time on request  = only available in this packaging unit  = the approval process is not yet completed  = Layher Individual possible  
 = new in the catalogue

# Stringers and guardrails for modular stairway

## Modular stairway at scaffolding

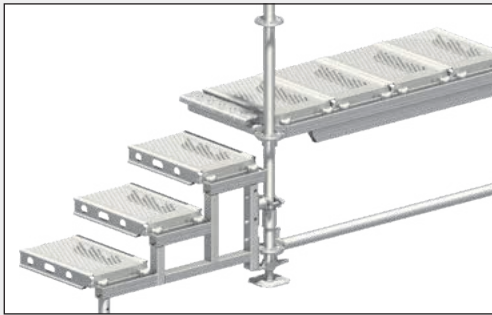

## Modular stairway at Event stage

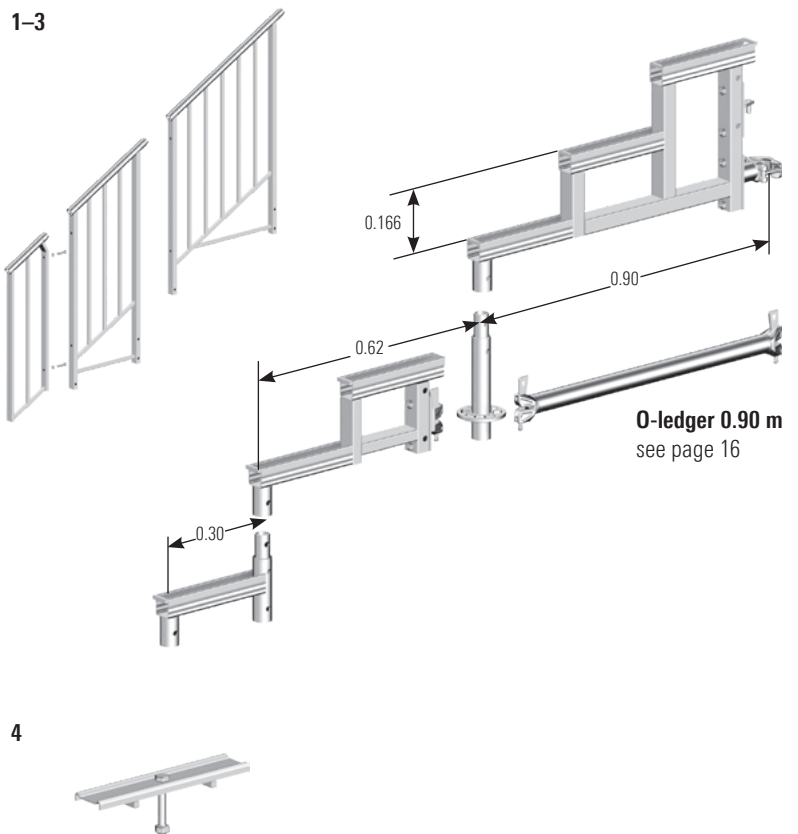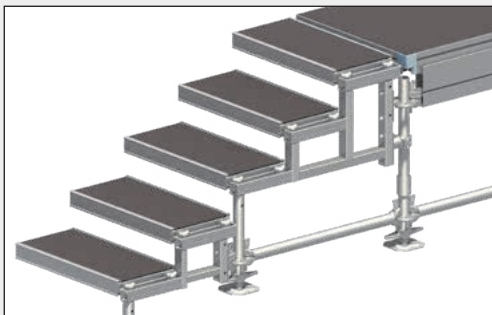

## Lattice beams

The **U-lattice beam LW**, steel **5** and the **U-lattice beam**, aluminium **6**, with 4 wedge heads for locating on standards are used to construct birdcage scaffolding or in conjunction with the **spigot for U-lattice beam 9**, for further construction in the scaffolding standard dimension or for bridging.

**O-lattice beam LW**, with 4 wedge heads **7**, steel, is used for further construction in the scaffolding standard dimension. The top and bottom cylindrical tube chords are secured to the standard with the wedge heads.


**U-ledger for lattice beam 8** for accommodating scaffolding decks for bridging with Allround lattice beams.

Applicable to lattice beams: when lattice beams are used, the stability of the scaffolding must be verified in each case. Loading tables available on request. The scaffolding deck must be secured against lifting off in each case with **U-lift-off preventer**.


### 5 / 6



U-lattice beam deck configuration	
2.07 m	6 x 0.32 m
2.57 m	7 x 0.32 m and 1 x 0.19 m
3.07 m	9 x 0.32 m
4.14 m	12 x 0.32 m and 1 x 0.19 m
5.14 m	15 x 0.32 m and 1 x 0.19 m
6.14 m	18 x 0.32 m and 1 x 0.19 m

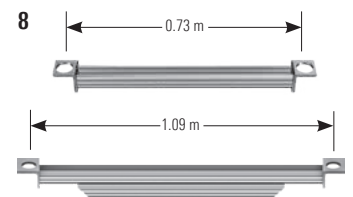

### 7

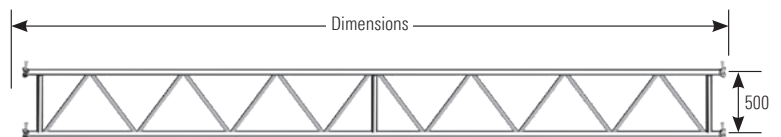


### 9

Ref. No. 2656.000

Ref. No. 2656.001

Ref. No. 2656.002

### 10

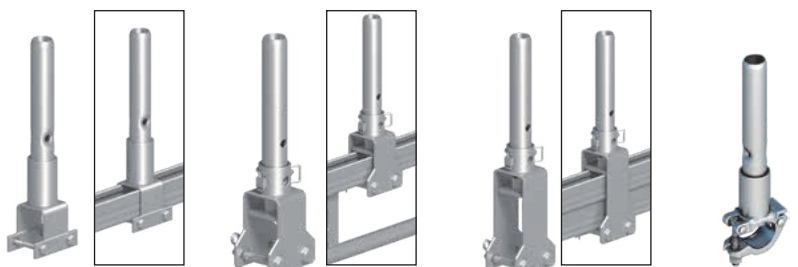

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Stringer for modular stairway</b>						
	1-step			0.30	2.40	50	5407.001
	2-step			0.60	5.50	50	5407.002
	3-step			0.90	8.00	20	5407.003
2	<b>Base collar 0.26 m</b> or modular stairway, with spigot			0.26	2.00	450	5407.021
3	<b>Guardrail for modular stairway</b>						
	1-step			0.30 x 1.10	6.50	40	5407.011
	2-step			0.60 x 1.10	14.00	25	5407.012
	3-step			0.90 x 1.10	16.00	25	5407.013
4	<b>Lift-off preventer with bolt</b>			0.29	0.40	500	5407.030
5	<b>U-lattice beam LW</b> with 4 wedge heads, steel			2.07 x 0.50	21.40	40	2673.207
				2.57 x 0.50	24.90	40	2673.257
				3.07 x 0.50	31.90	40	2673.307
				4.14 x 0.50	40.00	40	2673.414
				5.14 x 0.50	51.20	40	2673.514
				6.14 x 0.50	60.50	40	2673.614
6	<b>U-lattice beam</b> with 4 wedge heads, aluminium			1.57 x 0.50	8.60	50	3206.157
				2.07 x 0.50	12.30	50	3206.207
				2.57 x 0.50	15.20	50	3206.257
				3.07 x 0.50	17.00	50	3206.307
				4.14 x 0.50	24.60	50	3206.414
				5.14 x 0.50	30.20	50	3206.514
7	<b>O-lattice beam LW</b> with 4 wedge heads, steel			2.07 x 0.50	22.20	40	2674.207
				2.57 x 0.50	25.50	40	2674.257
				3.07 x 0.50	30.90	40	2674.307
				4.14 x 0.50	40.20	40	2674.414
				5.14 x 0.50	51.20	40	2674.514
				6.14 x 0.50	59.20	40	2674.614
				7.71 x 0.50	71.00	40	2674.771
8	<b>U-ledger for lattice beam</b> only in conjunction with Ref. No. 2656.000			0.73	3.10	42	4923.073
				1.09	7.80	42	4923.109
9	<b>Spigot for U-section</b>						
	only for uses without lift-off preventer, incl. 2 bolts				1.80	250	2656.000
	for lattice beam, incl. 2 bolts, also for U-bridging ledger				2.10	250	2656.001
					2.10	180	2656.002
10	<b>Spigot for O-lattice beam</b> with half-coupler for lattice beam and ledger	19		0.30	1.81	25	4706.019
		22		0.30	1.81	25	4706.022







## FW System

To provide wide-span bridging too, or to support heavier loads, the Layher range includes the **Allround FW System (FW)**. This additional Allround component is a modular-designed lattice beam of high load-bearing capacity that can be completely integrated into the Allround construction kit thanks to the standardised system dimensions. For lattice structures, only three essential supplementary components are needed, and they can be rapidly connected using pins: **an Allround FW post 2**, **a sturdy Allround FW chord 1** as the top and bottom chord, and a length-adjustable **Allround FW diagonal rod** consisting of **4/6**. A contribution to the high load-bearing capacity of the new product is made on the one hand by the use of efficient steel grades and the design height of the Allround FW System, and on the other hand by its installation in the Allround system standard dimension. This ensures a structurally advantageous and central force transmission – an offset is prevented.

A further special feature is the stepless adjustment of the diagonal rods using a **turnbuckle 4** – for example to build slightly higher structures. This compensates for unwelcome sagging. A crossed diagonal configuration is also possible for transmitting both positive and negative lateral forces.

The modular design of the Allround FW System not only permits flexible heights, widths and lengths for optimum adjustment to load and geometry requirements, but also ensures economical transport and assembly. This is thanks to bolt-free connection technologies and the low weight of the handy individual components, which is 19 kilograms maximum. If no crane is available at the site, the Allround FW System can be assembled manually without any problem – also in cantilevered construction from a secured level.

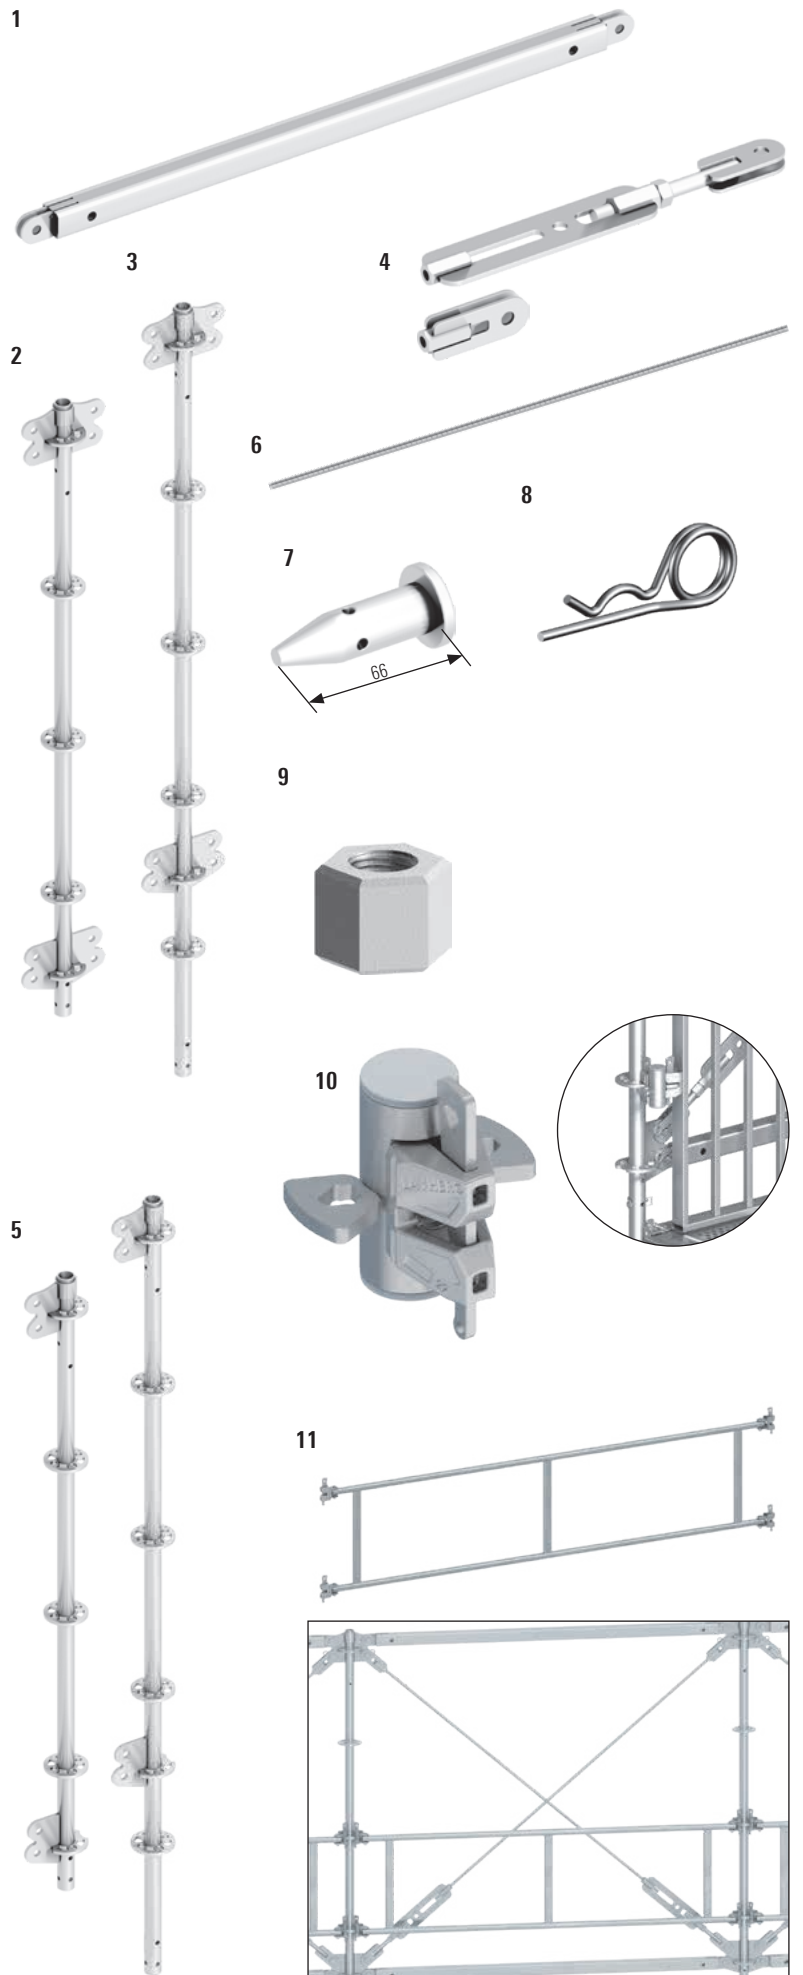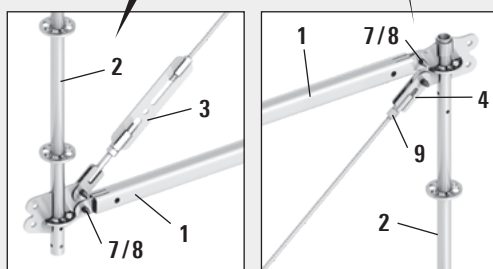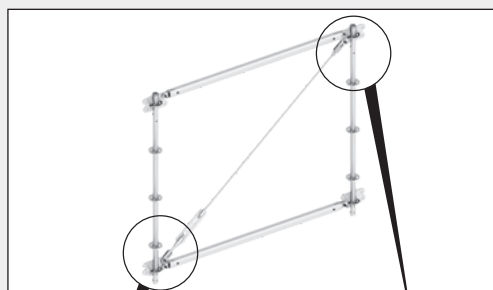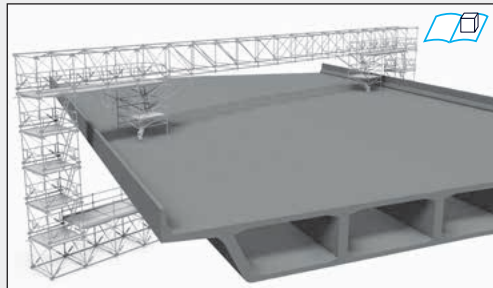

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	FW chord		1.57	10.50	20	2646.157		
			2.07	13.90	20	2646.207		
			2.57	17.40	20	2646.257		
2	FW post		1.00	12.60	28	2646.100		
			1.50	15.40	28	2646.150		
			2.00	17.20	28	2646.200		
3	FW post, extended for accessible bridgings		2.50	19.90	28	2646.250		
4	FW endfitting with turnbuckle			3.80	250	2646.202		
				0.95	500	2646.203		
5	FW post, single-side-connection for connection to the Allround Scaffolding in longitudinal direction		1.00	9.50	28	2646.105		
			1.50	12.30	28	2646.155		
			2.00	14.60	28	2646.205		
			2.50	17.30	28	2646.255		
6	FW diagonal rod							
			for 2.57 x 2.00 m bay	2.37	3.30	100	2646.210	
			for 2.07 x 2.00 m bay	1.96	2.80	100	2646.211	
			for 2.57 x 1.50 m bay	2.07	2.90	100	2646.213	
			for 2.07 x 1.50 m bay and 1.57 x 2.00 m bay	1.63	2.43	100	2646.214	
			for 1.57 x 1.50 m bay	1.23	1.85	100	2646.215	
			for 2.07 x 1.00 m bay	1.40	2.12	100	2646.216	
	for 1.57 x 1.00 m bay	0.96	1.44	100	2646.217			
7	Bolt 20 x 66			1.61	10	2646.221		
8	Securing pin, d=4 mm			1.50	50	5905.002		
9	FW nut, 30 x 15 as counter nut for distortion lock while spanning	30		1.50	10	2646.231		
10	FW guardrail adapter for guardrail mounting			1.20	300	2646.001		
11	FW double guardrail with swivelling wedge heads		1.57	9.20	30	2647.157		
			2.07	11.90	30	2647.207		
			2.57	13.60	30	2647.257		





## Bridging system

The **Allround bridging system** is the ideal complement to Layher Allround equipment. With just a few additional components, the load-bearing capacity of the proven Allround system can be increased enough to create, for example, wide-span footbridges or support structures for heavy loads.

The Allround bridging system is available in the familiar Layher dimensions of 2.07 m and 2.57 m, with its unique wedge head connection making it fully compatible with Layher Allround equipment. Simple bolt connections enable the components of the bridging system to be connected up, resulting in quick and easy assembly.

When used as a support beam for a scaffolding structure, podium or roof structure, the Allround bridging system is connected to the structure above it by using Allround standards integrated into the top. Using the wedge heads welded onto the sides, even suspended scaffolding structures can be connected, or several bridging units can be connected next to one another for a further increase in the load bearing capacity.

When a footbridge is built, the Allround bridging system is connected to Allround standards using the wedge heads provided on the sides of the posts. Depending on application, either Event decks or steel decks can be used. The bridge can also be clad using Layher Protect cassettes and roofed. The bridge is mounted on Layher heavy-duty columns with specially designed support elements. These support elements permit pre-assembly on the ground and subsequent insertion by crane, which is a major advantage when spanning bridges across roads.

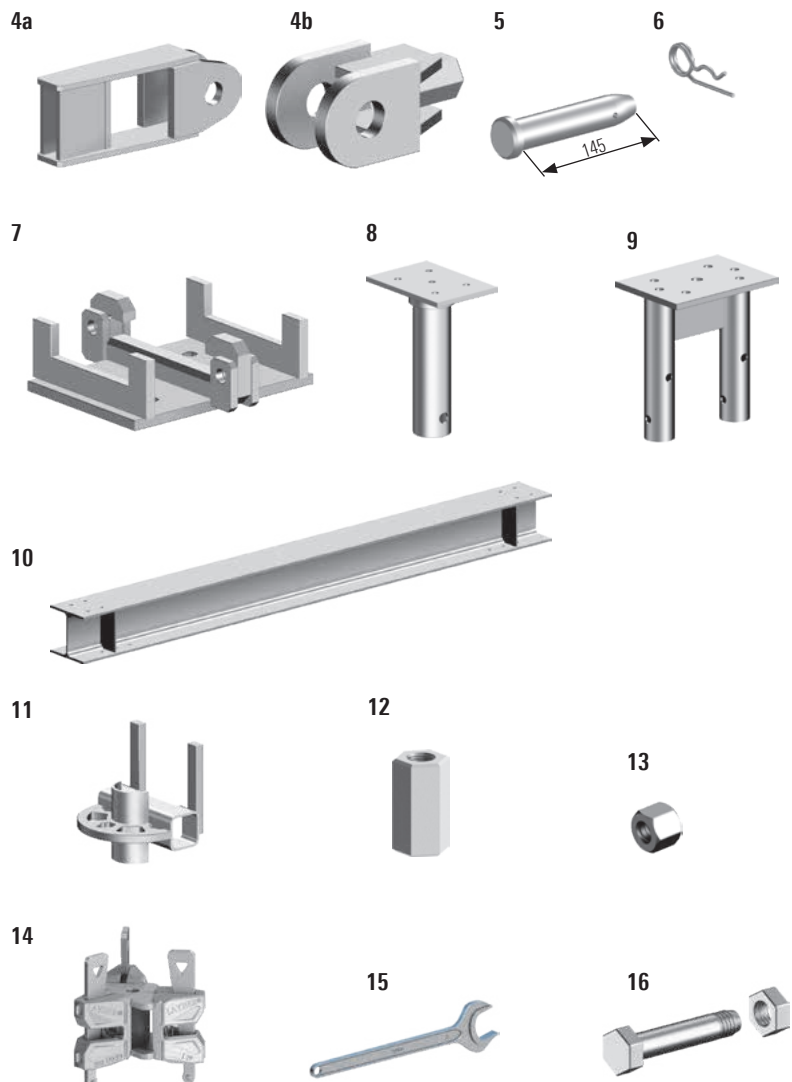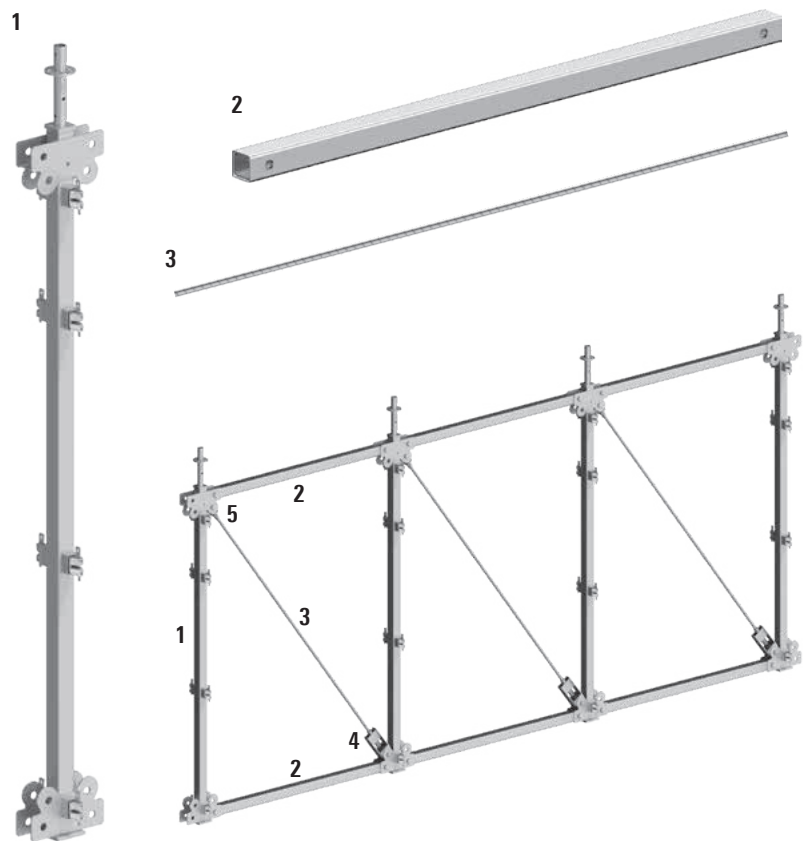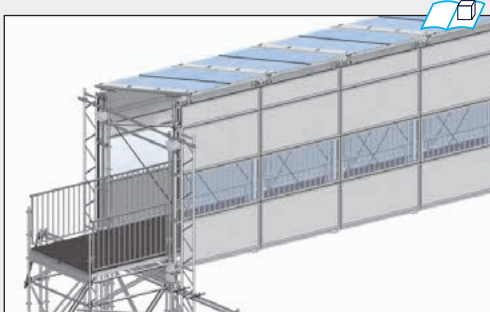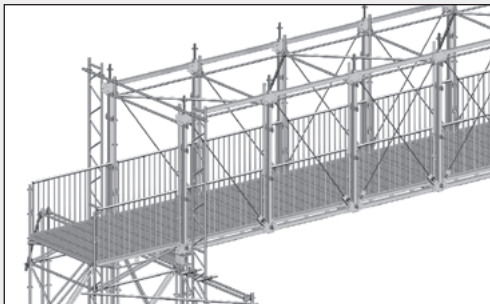

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>Bridging system post</b>			3.22	57.30	18	<b>2671.000</b>	
2	<b>Bridging system chord</b>							
	for 2.07 m bay length			1.97	20.80	45	<b>2671.010</b>	
	for 2.57 m bay length			2.47	25.80	45	<b>2671.020</b>	
3	<b>Bridging system diagonal rod</b>							
	for 2.07 m bay length			3.05	7.90	75	<b>2671.030</b>	
	for 2.57 m bay length			3.37	8.70	75	<b>2671.040</b>	
4	<b>Bridging system diagonal anchoring</b>							
	a) without nut				5.50	300	<b>2671.050</b>	
	b) with nut	36			2.90	300	<b>2671.060</b>	
5	<b>Bolt 30 x 145</b>				8.00	10	<b>2671.072</b>	
6	<b>Securing pin d=4 mm</b>				1.50	50	<b>5905.002</b>	
7	<b>Bridging system support element</b>				4.75	80	<b>2671.080</b>	
8	<b>Bridging system adapter for heavy-duty column</b>				5.50	124	<b>2671.090</b>	
9	<b>Bridging system support for double standard</b>				4.90	50	<b>2671.140</b>	
10	<b>Bridging system support beam</b>							
	for bridge width 1.57 m				119.20	4	<b>2671.095</b>	
	for bridge width 2.07 m				145.75	4	<b>2671.100</b>	
	for bridge width 2.57 m				167.00	4	<b>2671.105</b>	
11	<b>Protect holder</b>				1.00	250	<b>2671.110</b>	
12	<b>Clamping nut</b>	36			4.00	10	<b>2671.122</b>	
	for diagonal rod, WS 36 x 70, galvanized							
13	<b>Locking nut</b>	36			4.00	20	<b>2671.132</b>	
	for diagonal rod, WS 36 x 30, galvanized							
14	<b>Wedge-head coupler triple</b>				2.30	250	<b>2671.150</b>	
15	<b>Open ended wrench WS 36</b>	36			0.50	5	<b>2671.135</b>	
16	<b>Hexagon head bolt M12 x 35 with nut</b>	19			5.00	50	<b>2671.162</b>	

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible  
 = new in the catalogue



## FlexBeam


Rapid assembly and optimum use of materials ensure economical scaffolding structures. The aluminium **FlexBeam** makes it possible. It enables surface scaffolding to be efficiently assembled both suspended and upright.

Because when compared with the steel lattice beam 450:

- ▶ The **bending load capacity is up to 2.5 times higher**, meaning that larger support and suspension configurations are possible
- ▶ The **structural height with just 280 mm is about 40% lower**, resulting in lower construction heights and thus expanded possibilities for use
- ▶ As a rule **no compression chord bracing** is required
- ▶ A channel-shaped upper side of the section is provided for **direct suspension of U-system decks** which are also secured in position by the use of a new and easy-to-fit lift-off preventer

Further expansion using standard Allround components is also possible. In the case of use as suspended scaffolding the **anchor plate 3** and the **suspension shoe 4** are available for receiving the beam. The **anchor plate 3** is intended for direct wall-plug connection to the structure.

The **suspension shoe 4** can be directly connected to the **tie rod adapter 5**. Optionally the suspension can be extended in length by Allround standards using the **standard adapter male/female 6/7**. The tie rod adapter is used for connection to a tie rod firmly anchored in the structure and suitable for this purpose.




The **standard connector 8** is used for expansion within the Layher system dimensions. The **lift-off preventer 13** can be inserted anywhere and moved in the longitudinal direction of the beam. The lift-off preventer is fixed in place with the **lift-off preventer bolt 15**.

To extend the length of beams the **FlexBeam spigot 1** is available, which is inserted into the hollow chamber of the beam section and then pinned to the beam.

The timber beam support permits lateral fitting of an extra beam, for example to act as a basis for providing fitted bays in curved sections.



The **end bracket adapter 20** permits connection of the FlexBeam end to an Allround standard at the system level. It offers adjustment possibilities in both the vertical and horizontal directions. The decking protects pedestrians from falling items.

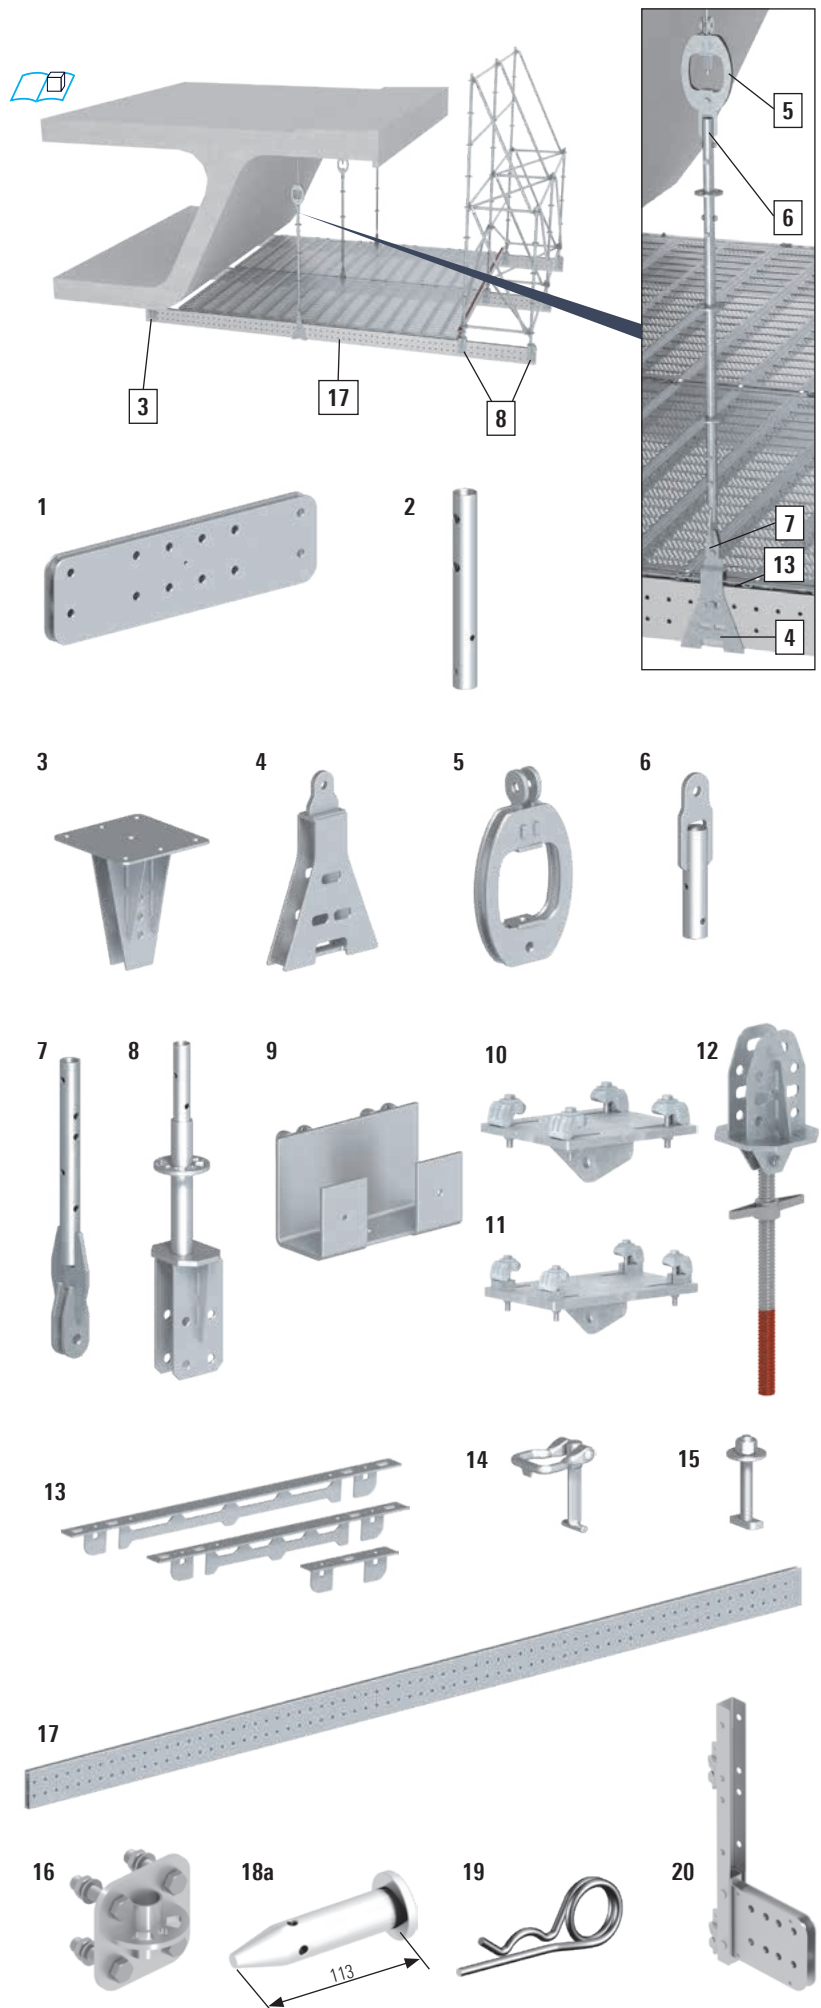


Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.			
1	<b>FlexBeam spigot</b> for stiff connections of FlexBeams			0.80	16.40	50	2657.010		
2	<b>FlexBeam anchor plate tube</b>				1.31	200	2657.020		
3	<b>FlexBeam anchor plate</b>				12.00	50	2657.030		
4	<b>FlexBeam suspension shoe</b> vertical bearer for the FlexBeam				9.30	50	2657.040		
5	<b>FlexBeam tie rod adapter</b> as connection between Allround standards (w/o spigot) to the diagonal rod				5.70	100	2657.050		
6	<b>FlexBeam standard adapter male</b> for further construction with Allround standards (w/o spigot)				1.70	300	2657.060		
7	<b>FlexBeam standard adapter female</b> for connection between Allround standard and suspension shoe				2.94	250	2657.070		
8	<b>FlexBeam standard connector</b> for protective wall structures				6.64	100	2657.080		
9	<b>FlexBeam timber beam support</b> use for e.g. trapeziform adjustment bays				3.41	150	2657.090		
10	<b>Clamping plate 70 to 210 mm</b> perm. load 59.5 kN, drilling d=21 mm, flange width 5–26 mm		0.29 x 0.26		12.50	50	4015.210		
11	<b>Clamping plate 190 to 330 mm</b> perm. load 59.5 kN, drilling d=21 mm, flange width 5–46 mm		0.30 x 0.26		21.70	25	4015.211		
12	<b>FlexBeam head jack 60, swivelling</b>				11.20	50	2657.160		
13	<b>FlexBeam lift-off preventer</b>		0.26	0.70	250	2657.026			
			0.76	2.22	150	2657.076			
			1.00	3.30	50	2657.100			
14	<b>FlexBeam lift-off preventer lock</b>				8.10	50		2657.111	
15	<b>FlexBeam lift-off preventer bolt</b>				2.80	20		2657.121	
16	<b>FlexBeam rosette adapter</b> for the lateral connection of Allround O-ledgers and horizontal diagonal braces to the beam. Including 4 bolts and nuts	30			2.73	150	2657.130		
17	<b>FlexBeam Alu U-beam</b>		3.00	30.00	12	2657.300			
			4.00	40.00	12	2657.400			
			5.00	50.00	12	2657.500			
			6.00	60.00	12	2657.600			
			7.00	70.00	12	2657.700			
18	<b>Bolt 20 x 113</b>				3.00	10		2646.281	
19	<b>Securing pin d=4 mm</b>				1.50	50		5905.002	
20	<b>FlexBeam end bracket adapter</b> for connection to an Allround standard in system level at beam end	24			11.82	20	2657.015		

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layher Individual possible

= new in the catalogue


## FlexBeam

The **cross-connector 1** allows FlexBeams, positioned one above the other and at right angles, to be turned into a grid structure. Special structures produced specifically for projects – e.g. welded steel structures – can simply be replaced by them, not only resulting in economic benefits but also saving on raw material resources.

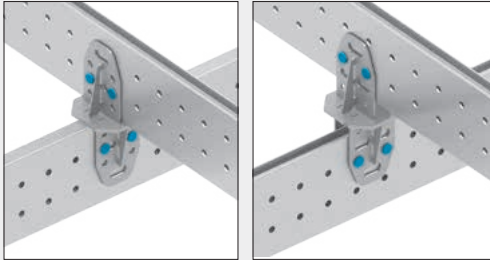

Securing positions of beams

Suspended beams



Using existing Allround system components to provide side protection on the FlexBeam permits economical system solutions without the need for costly improvisation. Where necessary the **guardrail adapter 2** can also be used as a connecting piece for elevated scaffolding.

## Allround Wall Bracket

A wall bracket is used in scaffolding construction to support scaffolding on the facade. The conventional and previously known brackets are steelwork-based designs made from, for example, I-sections which are heavy and awkward to handle. This greatly hinders assembly.

The new Allround wall bracket – consisting of the **wall connection unit 3** and **pressure support 4** – is by contrast lightweight, small and handy. That makes it ideal for quick attachment to the facade. In combination with the components from the Allround construction kit, they enable a wide range of possible configurations to be created. Building of the facade scaffolding can continue using both Allround components and the modular access system AGS for facades.

If one or more wall brackets cannot be arranged on the wall in the axis dimension of the scaffolding structure (e.g. in the case of window openings), or to further reduce the assembly effort, the Aluminium FlexBeam can be used to absorb the loads.

The transition between the wall bracket and the Aluminium FlexBeam is created with a **FlexBeam crosspiece 5** and the **cross-connector 1**.

The scaffolding is mounted on the Aluminium FlexBeam, using the **base plate support 6**.




Depending on the position of the guardrail adapter 2, a different configuration with lift-off preventers is chosen:




**Standard spacing 0.73 m**  
1 x lift-off preventer 0.26 m



**Standard spacing 1.09 m**  
1 x lift-off preventer 0.76 m




**Standard spacing 2.07 m**  
1 x lift-off preventer 1.00 m, 1 x lift-off preventer 0.76 m






**Standard spacing 2.57 m**  
2 x lift-off preventer 1.00 m, 1 x lift-off preventer 0.26 m





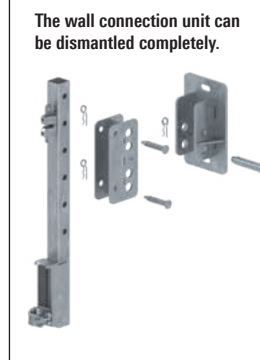



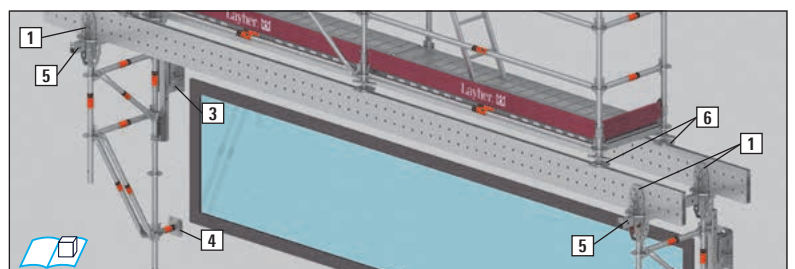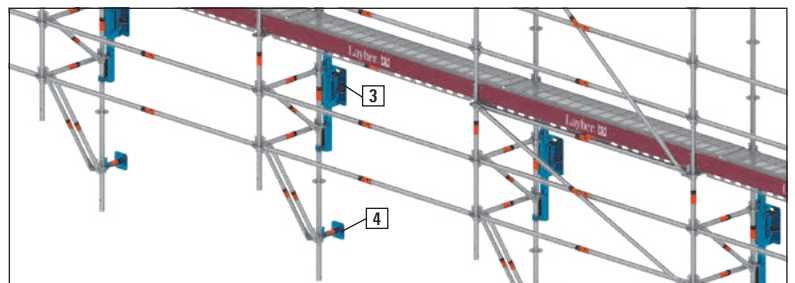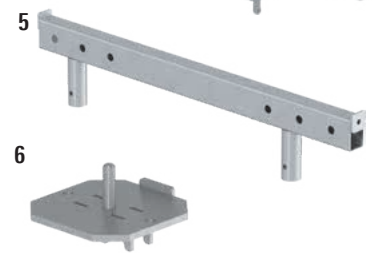





**Standard spacing 3.07 m**  
2 x lift-off preventer 1.00 m, 1 x lift-off preventer 0.76 m



The wall connection unit can be dismantled completely.



Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	FlexBeam cross-connector			10.40	30	2657.140	
2	FlexBeam guardrail adapter	19		3.80	72	2657.085	
3	Allround wall connection unit	19		25.80	40	2632.500	
4	Allround pressure support			2.44	100	2632.501	
5	FlexBeam crosspiece		0.73	7.09	50	2657.073	
6	Base plate support			1.83	100	2657.150	

WS = wrench size   PU = packaging unit    = available ex works    = delivery time on request    = only available in this packaging unit    = the approval process is not yet completed    = Layher Individual possible  
 = new in the catalogue




The high-strength, multifunctional **aluminium TwixBeam 1** from Layher – consisting of two bolted aluminium U-sections with a height of 200 mm – has a wide range of possible uses, both in shoring construction and in scaffolding construction. The TwixBeam is available in lengths from 0.80 m to 6.60 m. The beam is characterised by high load-bearing capacity yet low weight.

The bolted structure permits dismantling of the beam for different applications while ensuring that the material remains its maximum loading capacities and is not weakened by welding.



	TwixBeam	Beam connector
Height [mm]	200	140
Width [mm]	160	50
Weight [kg/m] completely assembled	ca. 13.0	ca. 7.0
Bending stiffness EI [kNm <sup>2</sup> ] – gross	1,760	440
Bending moment M <sub>Rd</sub> [kNm]	57.1	22.2
Shear force V <sub>Rd</sub> [kN]	226	138

There are many matching expansion parts available for the aluminium TwixBeam: The **swivelling spindle 60 4** is inserted into the 52 mm-wide intermediate area of the beam and pinned in place. It can be used as a head jack or base plate. Standard or suspended structures can be built by passing through an Allround standard or the swivelling spindle. The **spindle strut 8** (patent pending) permits stiffening or bracing of various structures – it can transmit tensile and compressive forces. **Beam connector 9** and **insertion beam 7** complete the system for flexible adaptability to all site conditions and contours.


To assemble grid structures, the TwixBeam can be placed above the other. The connection is made by beam clamps.

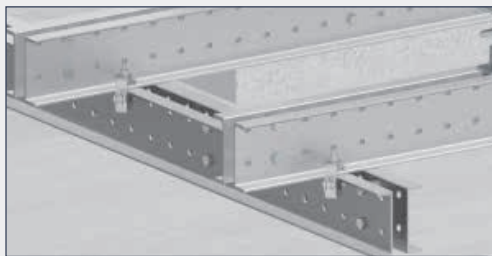

To increase the loading capacity, the beams can also be mounted one above the other in the same direction. They are secured using beam clamps or by an offset arrangement of the spacer.

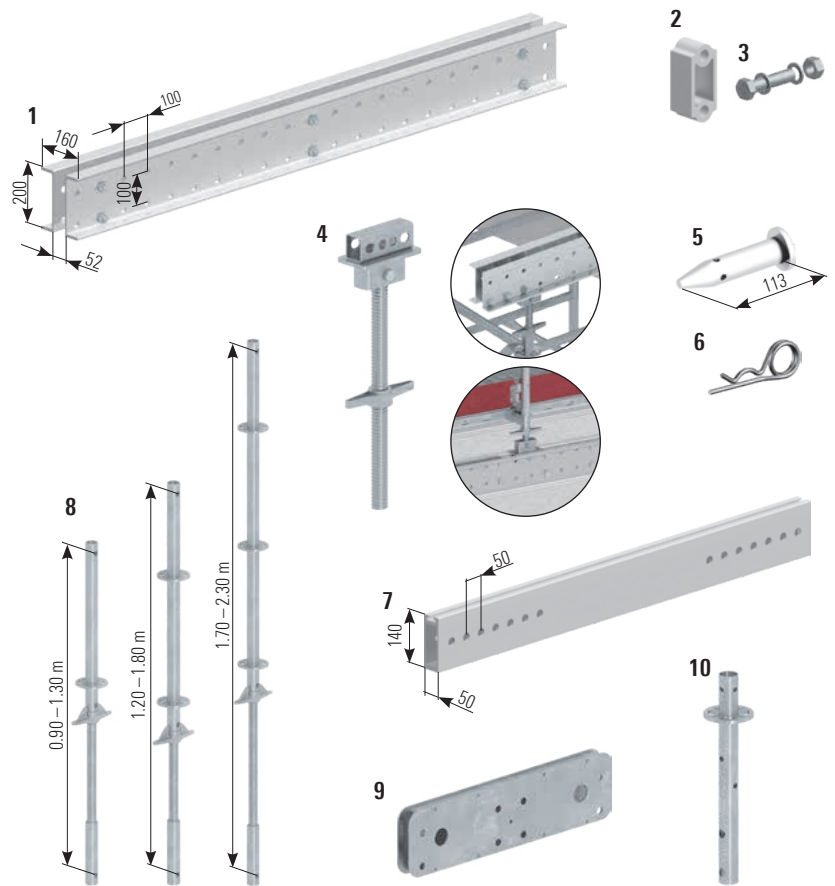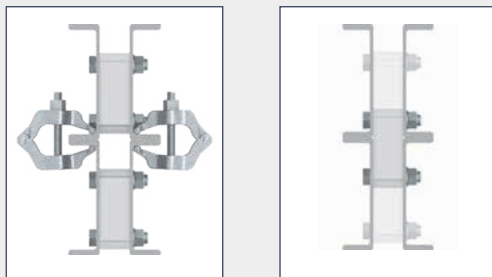


## Application examples in scaffolding construction

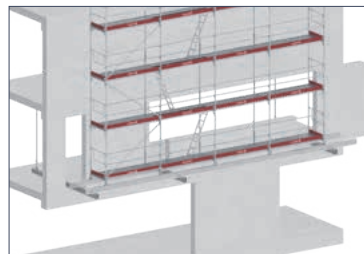

### Standard structures

Standard bracket scaffolding – TwixBeam structure assembled as a grid

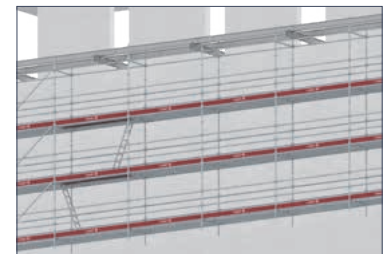

### Suspended structures


Suspended bracket scaffolding – TwixBeam structure assembled as a grid. Suspension made by through-passing standards.

## Application examples in shoring construction



### Main beam


Thanks to the high load capacity of the TwixBeam, the TG 60 can be used to the full and the weight advantage allows an easy striking.

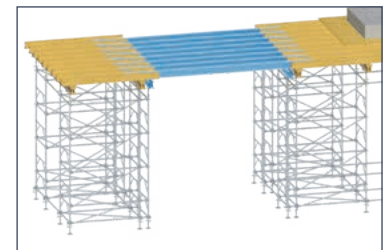

### Combination of TwixBeam and H-20 beams


Thanks to the same structural height as the H-20 beam, combination on the same level is possible without any problem – without underfilling.

Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>TwixBeam aluminium</b> completely assembled, with spacer, bolts and nuts	0.80	11.60	20	4041.080
		1.30	17.30	20	4041.130
		1.70	23.10	20	4041.170
		2.10	27.60	20	4041.210
		2.60	34.60	20	4041.260
		3.10	40.30	20	4041.310
		3.60	47.30	20	4041.360
		4.60	60.00	20	4041.460
		5.60	72.60	20	4041.560
		6.60	85.30	20	4041.660
2	<b>Spacer</b>		0.53	250	4041.000
3	<b>Bolt M20 x 90</b> with nut and washers		3.76	10	4041.004
4	<b>Articulated TwixBeam spindle 60</b> solid, for the head and bottom area	0.60	8.20	100	4041.002
5	<b>Bolt 20 x 113</b>		3.00	10	2646.281
6	<b>Securing pin, d=4 mm</b>		1.50	50	5905.002
7	<b>TwixBeam insertion beam</b>	0.49	3.40	30	4042.049
		0.91	6.34	30	4042.091
		1.27	8.89	30	4042.127
		1.75	12.36	30	4042.175
		2.25	15.94	30	4042.225
		2.75	19.52	30	4042.275
8	<b>Spindle strut</b> to transmit tensile and compressive forces	0.90 – 1.30	11.00	50	4043.130
		1.20 – 1.80	15.30	50	4043.180
		1.70 – 2.30	18.10	50	4043.230
9	<b>TwixBeam beam connector</b>	0.80	16.40	50	4041.001
10	<b>Standard connection</b>	0.54	2.30	100	4041.003

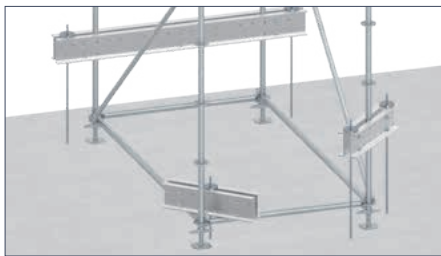


#### Ground anchoring

Tower scaffolding anchored in the ground

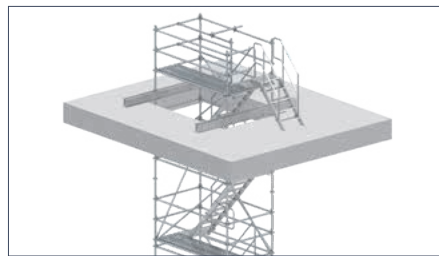


#### Staitower suspension

The supporting structure is easily made by spanning the cutout in the slab using the TwixBeam. The staitower can be assembled suspended, from the top downwards.

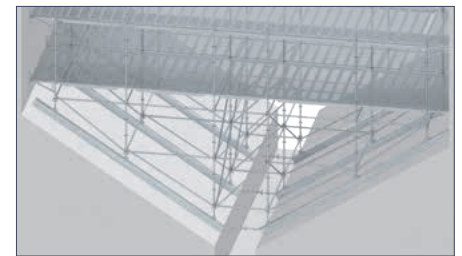

#### Further application examples

E.g. Beam structures for adjustment to funnel-like boiler

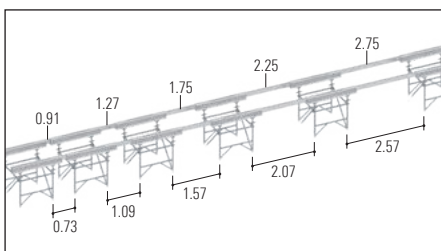


#### Use as continuous beam

With the aid of the 140 mm-high insertion beam in the intermediate area of the aluminium TwixBeam, or by using the beam connector, main beams can also be constructed as genuine continuous beams.



#### Adjustment to the wall construction

The insertion beam permits, thanks to varying extension lengths, easy adjustment of the edge areas.


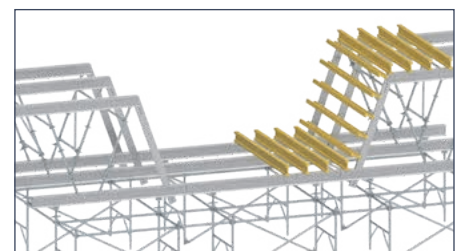


#### Further application examples


E.g. trussed-beam framework made of TwixBeam, insertion beam and TwixBeam struts – mounted on Shoring TG 60

## TwixBeam


The **wall shoe for TwixBeam aluminium beam 1** allows the TwixBeam to be used directly on the wall. The tube at the front with the integrated cross hole allows a threaded spindle to be attached to support the TwixBeam beam or to suspend Allround Scaffolding standards. Upright scaffolding constructions are also possible by bolting in a tube connector.

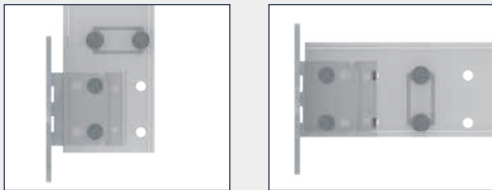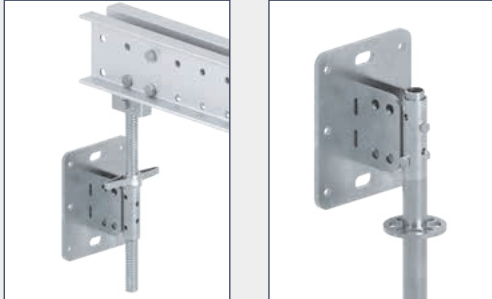




The **wall shoe for TwixBeam insertion beam 2** has connection options for either standards (blue), TwixBeam spindle struts (red) or for the insertion beam (green).









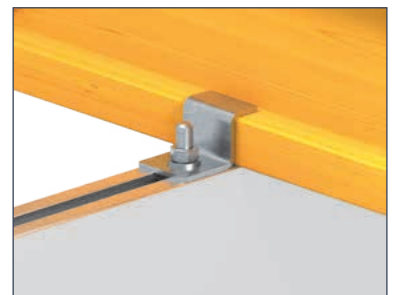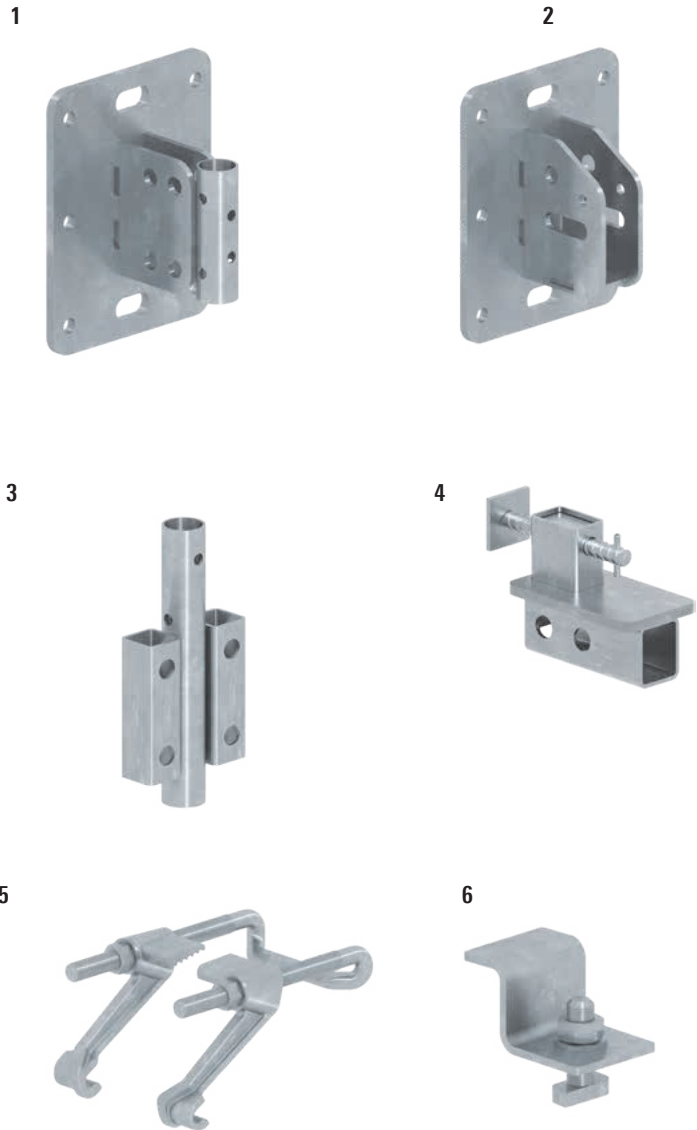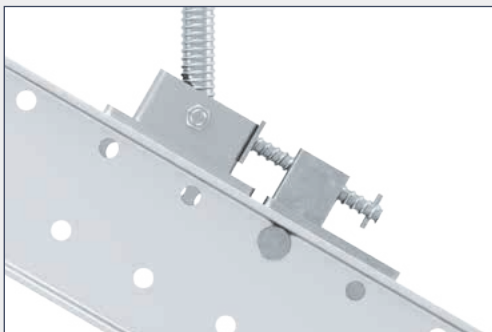





The **spindle and standard adapter 3** allows a spindle or an Allround Scaffolding standard to be attached.



The **TwixBeam Stopper 4** counteracts the downward force of the TwixBeam spindle on inclined constructions outside the hole pattern of the TwixBeam. The stopper is simply connected to the TwixBeam with bolts and pins.



The **TwixBeam H-20 beam clamp 5** and the **TwixBeam H-20 beam clamp for insertion beams 6** secure the H-20 wooden formwork beam.

Pos.	Description	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	Wall shoe for TwixBeam aluminium beam 	10.30	50	4041.005	
2	Wall shoe for TwixBeam aluminium insertion beam 	10.50	50	4041.006	
3	TwixBeam spindle and standard adapter 	2.90	100	4041.007	
4	TwixBeam Stopper 	2.80	100	4041.008	
5	TwixBeam H-20 beam clamp 	0.80	250	4041.009	
6	TwixBeam H-20 beam clamp for aluminium insertion beams 	0.30	1000	4041.010	



# Shoring TG 60

The **shoring TG 60** ensures a fast, flexible and safe assembly of shoring towers. The Allround shoring TG 60 is able to bear **up to 6 tons per standard**.

The structural analysis of the Allround shoring TG 60 complies to DIN EN 12812.


The heart of the TG 60 are the **shoring frames TG 60** with integrated rosettes. All frames are symmetrical parts, thus the orientation of the diagonal braces can be varied.

The adaptation to the dimension of the formwork beams can be easily made by using different Allround ledgers and diagonal braces from 1.09 m to 3.07 m (see figure "bay length adaptation").

Thanks to the perfect compatibility to Allround Scaffolding, the towers of the TG 60 can be adapted flexibly to any building condition.

The shoring tower TG 60 can be assembled in horizontal position on the ground. Then the tower will be placed by crane. Otherwise it can be assembled in vertical position – optionally directly at the place of action or somewhere else, with placing it with its quickly mounted **castors**.



The Allround shoring TG 60 has an integrated advanced guardrail without any accessories for assembly in vertical position. For the Allround shoring TG 60, only solid base plates (see page 10) may be used.

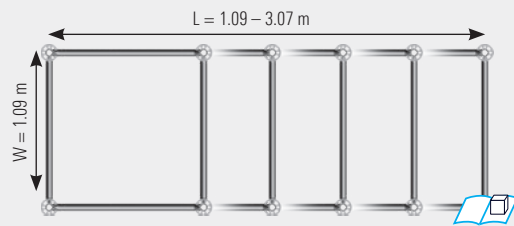

**Bay length adaptation** with Allround serial ledgers from 1.09 m to 3.07 m.

Further information about the Allround Shoring TG 60 can be found in the product video: [yt-tg60-en.layher.com](http://yt-tg60-en.layher.com)

## TwixBeam combined with Allround Shoring TG 60



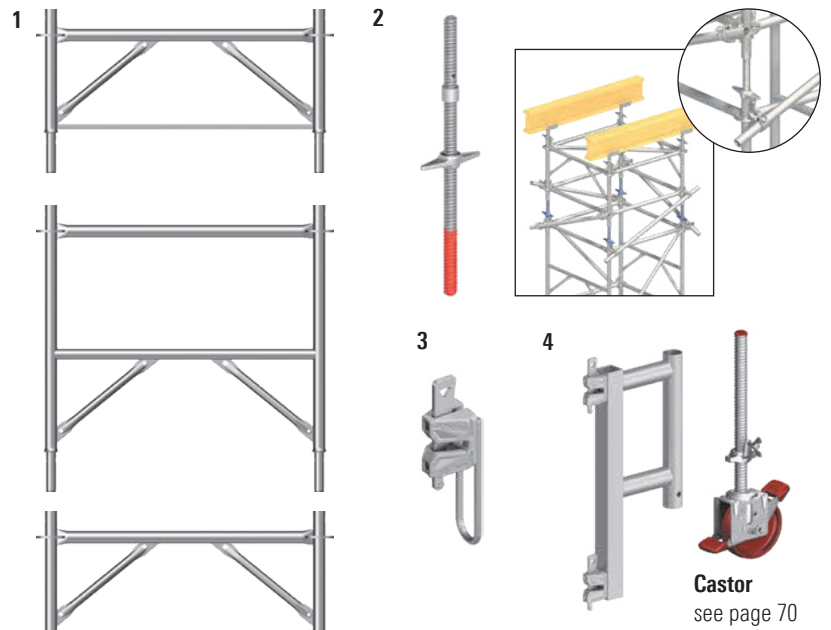
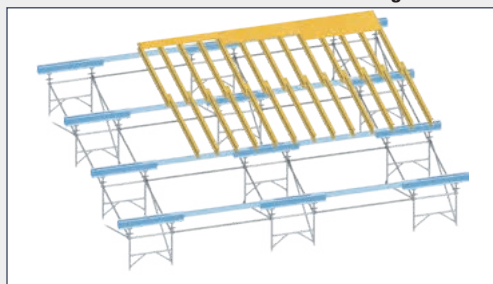


**Castor**  
see page 70


### Combination variants

Tower variant 1  
Base frame mounted at tower head

Tower variant 2  
Spacer frame mounted at tower head

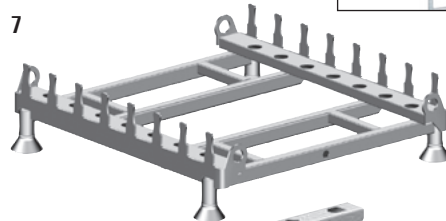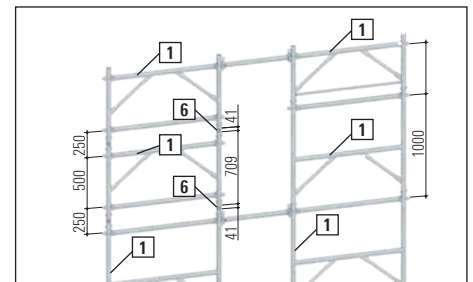

Load-capacity:  
 $\alpha = 90 - 60^\circ$ : 17.5 kN  
 $\alpha = 60 - 45^\circ$ : 11.2 kN  
 $\alpha = 45 - 30^\circ$ : 7.3 kN

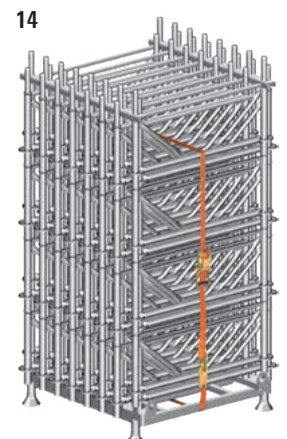

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>Shoring frame TG 60</b>						
	spacer frame, with spigot at the bottom, steel, hot-dip galvanized		0.50 x 1.09	13.00	21	<b>2602.036</b>	
	standard frame, with spigot at the bottom, steel, hot-dip galvanized		1.00 x 1.09	17.70	21	<b>2602.035</b>	
	base frame, without spigot, steel, hot-dip galvanized		0.71 x 1.09	15.90	21	<b>2602.034</b>	
2	<b>Intermediate jack</b> for high adjustment or inclined ceilings		0.80	8.34	100	<b>2602.038</b>	
3	<b>Spindle support</b> for placement by crane or by castors, steel, hot-dip galvanized			0.80	450	<b>2602.033</b>	
4	<b>Castor adapter</b> with 2 wedge heads			6.40	50	<b>2602.040</b>	
5	<b>Shoring spigot</b> for use of the initial frame as tower head, spigot is secured with 2 hinged pins			1.10	350	<b>2602.032</b>	
6	<b>Shoring spacer with spigot</b> for use of the base frame at the tower head, spigot is secured by 2 hinged pins. The spacer allows the combination of the Shoring tower TG 60			1.34	250	<b>2602.037</b>	
7	<b>Shoring frame pallet</b> for use with 22 shoring frames each level, stackable, craneable, optimized for truck beds		1.20 x 1.10	53.70	10	<b>5113.003</b>	
8	<b>Loading and stacking securing profile</b>						
	a) for use at the stack head with upwards pointing spigots		1.20	3.90	50	<b>5113.004</b>	
	b) for use at the stacking head without upwards pointing spigots (e.g. for stacking of initial frames)		1.20	3.40	10	<b>5113.005</b>	
9	<b>Aluminium section beam with wood</b>						
	3.00 m long, with riveted-in wood section, with holes drilled for connection by means of beam connectors		3.00	18.00	48	<b>4026.300</b>	
	4.00 m long, with riveted-in wood section, with holes drilled for connection by means of beam connectors		4.00	24.00	48	<b>4026.400</b>	
10	<b>Beam connector</b>		1.20	6.60	100	<b>4026.000</b>	
11	<b>Beam connector bolt</b> M12 x 70, with nut	19		0.70	10	<b>4026.003</b>	
12	<b>Fastening for crane transport</b>			3.40	100	<b>2630.000</b>	
13	<b>Adapter for ledger connection</b>	19		1.04	500	<b>4719.019</b>	
14	<b>Shoring TG 60 frame set</b>						
	consisting of 88 shoring frames 2602.036 on frame pallet			1205.50	1	<b>2602.043</b>	
	consisting of 44 shoring frames 2602.035 on frame pallet			840.30	1	<b>2602.041</b>	
	consisting of 22 shoring frames 2602.034 on frame pallet			410.30	1	<b>2602.042</b>	

WS = wrench size PU = packaging unit = available ex works = delivery time on request = only available in this packaging unit = the approval process is not yet completed = Layer Individual possible


= new in the catalogue

## Heavy-duty column

An extremely high load-bearing capacity is achieved by combining four Allround standards. Specially developed top and base pieces, and heavy-duty spindles fitted into the latter, permit a multiplication of the individual load capacities of each standard.

These individual elements can then be expanded, with the aid of further Allround standard elements, into any spatial structures required.

Load-bearing capacities as **single support**, **double support** or **tower**, you can get upon request.


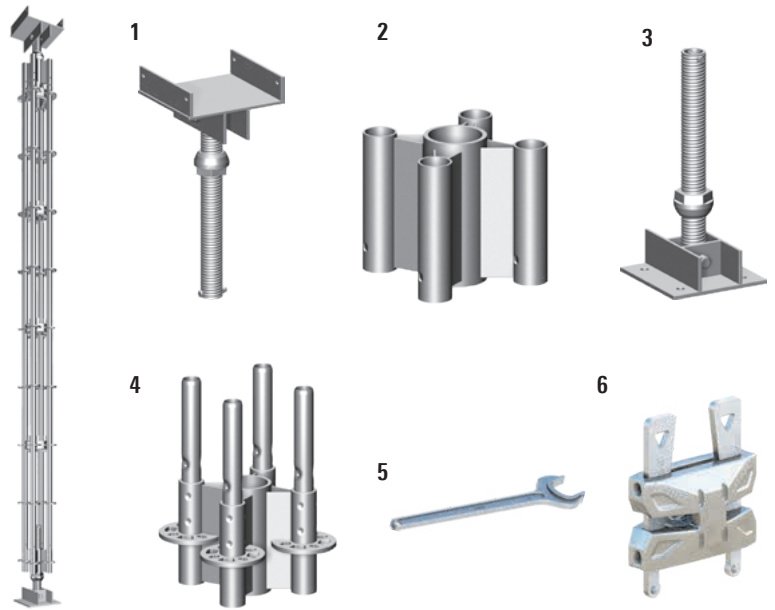


## Heavy Duty Tower XL

For construction projects where very high loads have to be transmitted at some points, for example in bridge building, shoring of particularly high load capacity is needed. Heavy shoring structures using steel sections are frequently used here.

With the Allround Heavy Duty Tower XL, Layher is now offering a modular and system-integrated shoring tower based on standard Allround Scaffolding parts.

With a few lightweight components supplementing the proven Allround Scaffolding construction kit, load capacities in the mega newton class are attained, yet easy to handle for better logistics and assembly – even when no crane is available – and permitting integrated work platforms and accesses within the system.

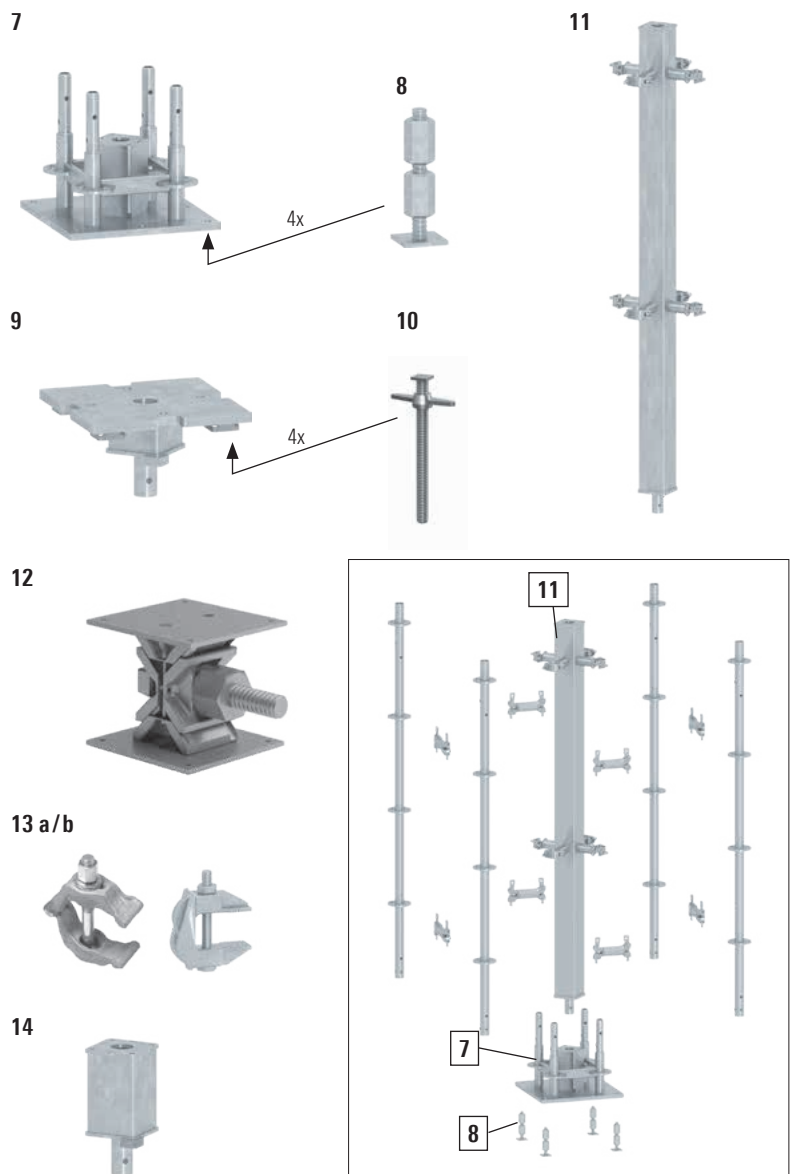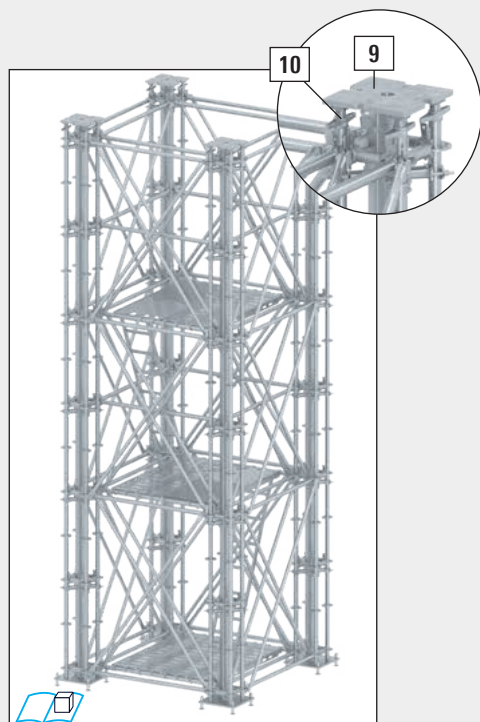

Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	Head jack for heavy-duty column		0.70	30.90	25	5312.004	
2	Head part for heavy-duty column		0.21	7.10	100	5312.003	
3	Base plate for heavy-duty column		0.70	24.10	40	5312.001	
4	Base piece for heavy-duty column		0.40	11.50	48	5312.002	
5	Single open-end wrench	95	0.60	7.00	5	5312.005	
6	Twin wedge coupler			1.20	25	2629.000	
7	Base plate		0.45 x 0.45	46.90	8	2612.000	
8	Adjustable foot			6.00	20	2612.005	
9	Head plate		0.35 x 0.35	21.70	20	2612.002	
10	Head jack		0.35 x 0.35	3.00	250	2612.003	
11	Profil		0.50	13.50	50	2612.050	
			1.00	21.00	25	2612.100	
			1.50	32.50	20	2612.150	
			2.00	40.00	8	2612.200	
12	Lowering wedge, 1000 kN	80		53.30	12	2612.004	
13	Beam clamp						
	a) clamping width 5 to 70 mm, with approval Z-8.34-873			1.60	500	5310.001	
	b) clamping width 12 to 50 mm			1.50	450	5310.000	
14	Compensation element		0.20	5.00	50	2612.020	



## Modular stairtower

Layher has now further optimized the use of the All-round system as a scaffolding stairtower – assembled from standard scaffolding components and prefabricated stairways with integrated platforms.

Thanks to a newly developed 2.21 m long vertical Allround standard (see page 12), this tower can now be preassembled as required, on the ground and section by section, before being moved by crane to form a tower with unidirectional or alternating stairways. Construction companies benefit in this way from an even easier, faster and above all safer assembly and modification, and from an increased height clearance of 2.20 m that makes its use even more convenient.

The advantages over expensive one-off structures or ad-hoc solutions made of timber are persuasive: rapid and economical assembly, optimum conditions for construction workers thanks to a high degree of safety during use, and exact matching to existing conditions.

**For securing of every floor, hinged pins are used (see page 12).**

**For the Allround modular stairtower, a type testing for assembly heights up to 115 m is available.**

### ADDITIONAL EQUIPMENT FOR END MODULE (O-VERSION)

Description	PU [pcs.]	Ref. No.
Internal stairway guardrail 1.50 m*	1	1752.012
Standard LW 1.00 m	4	2617.100
O-ledger LW 1.40 m	4	2601.140
O-ledger LW 2.57 m	4	2601.257
Guardrail post 1.30 m	1	2638.400
O-ledger LW 1.90 m with wedge head and U-fork	2	2638.401
O-steel deck LW 2.57 x 0.32 m	2	3890.257

\* only for alternating assembly

### STAIRWAY MODULE, UNIDIRECTIONAL (O-VERSION)

Description	PU [pcs.]	Ref. No.
O-comfort stairway 2.57 x 0.65 m	1	2635.257
Stairwell guardrail 1.00 x 0.50 m, WS 19	1	1752.004
Internal stairway guardrail	1	1752.007
Initial standard LW 2.21 m	4	2617.221
O-ledger LW 1.40 m	8	2601.140
O-ledger LW 2.57 m	8	2601.257
Diagonal brace LW 1.40 x 2.00 m	2	2683.140
Diagonal brace LW 2.57 x 2.00	2	2683.257
O-steel deck LW 2.57 x 0.32 m	2	3890.257


## Compact stairtower

In its standard version, the compact stairtower conforms to German regulations on "stairways for building work" and fits into many stairway recesses in buildings to house one or more families.

The stairway can be integrated into Allround work scaffolding. The use of standard parts means that only a few additional parts are needed.


Surface area without brackets 1.57 x 1.40 m.  
Exit clearances: 2.50, 2.75 or 3.00 m possible.

Permissible load capacity: 2.0 kN / m<sup>2</sup>

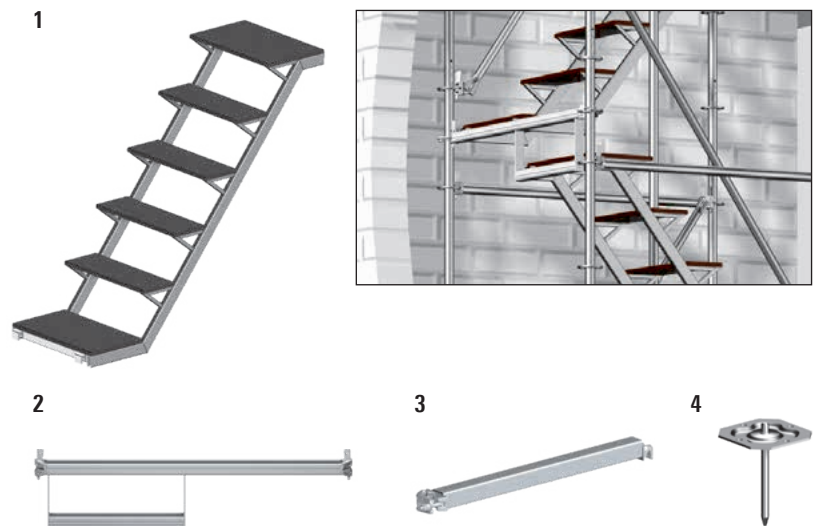

## Hollow wall bracket

The hollow wall bracket allows concreting work on prefabricated element walls. Forget about time-consuming timber structures – simply suspend the bracket from the top of the wall and lay system decks on it – that's all.

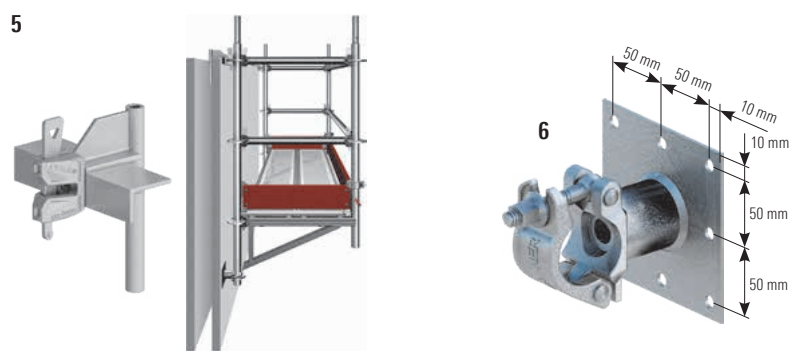

## STAIRWAY MODULE, ALTERNATING (O-VERSION)

Description	PU [pcs.]	Ref. No.
O-comfort stairway 2.57 x 0.64 m	1	2635.257
Internal stairway guardrail WS 19	1	1752.007
Initial standard LW 2.21 m	4	2617.221
O-ledger LW 1.40 m	6	2601.140
O-ledger LW 2.57 m	9	2601.257
Diagonal brace LW 1.40 x 2.00 m	2	2683.140
Diagonal brace LW 2.57 x 2.00 m	2	2683.257


## BASE



Description	PU [pcs.]	Ref. No.
Base plate 60	4	4001.060
Spindle support	4	2602.033

 Further information about the Allround Modular Stairtower can be found in the product video: [yt-armtt-en.layher.com](http://yt-armtt-en.layher.com)


## ALTERNATING VERSION

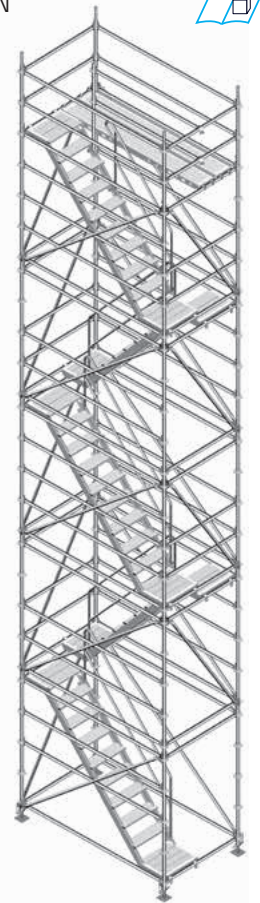
End module  
 Stairway module  
 Stairway module  
 Stairway module  
 Stairway module with less side protection  
 Base module



Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>U-stair</b> 1.25 x 0.60 m, steel, for 1.57 m bay, step height 0.25 m		1.25 x 0.60	32.50	12	2636.125 
2	<b>U-ledger with bearer</b> 1.40 m, for compensating 25 cm, see detailed sketch on left		1.40	9.00	50	2618.141 
3	<b>Cover deck</b> 0.79 m	19	0.79	3.35	100	2636.078 
4	<b>Adapter plate</b> steel, when placing the compact stair tower onto this adapter plate, it is easily possible to lay the screed.		0.15 x 0.15 x 0.20	1.30	100	2636.124 
5	<b>Hollow wall bracket adapter</b> steel, hot-dip galvanized			2.30	200	2602.400 
6	<b>Half-coupler with plate</b> for supporting the scaffolding structure against the wall	19	0.12 x 0.12	1.50	25	4705.019 

## Flat roof side protection

According to German regulations DGUV 101-038 relating to construction work, a fall protection system must be provided for work areas and walkways on roofs where the height of the fall is more than 3.00 m. The flat roof guardrail meets these requirements for safeguarding flat roofs. A few parts (e.g. **flat roof guardrail post 1**, **flat roof shift preventer 4**, **flat roof guardrail stiffener 3**, **flat roof ballast 19 kg 7**, **support for flat roof guardrail 6**, **wheel set and flat roof wheel set 2**) in addition to the already provided ledgers enable variable fall protection systems to be assembled quickly and easily. The maximum ledger length between two **flat roof guardrail posts 1** is 3.07 m.

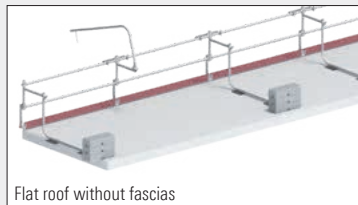


Flat roof without fascias



Flat roof with fascias



Flat roof with high fascias

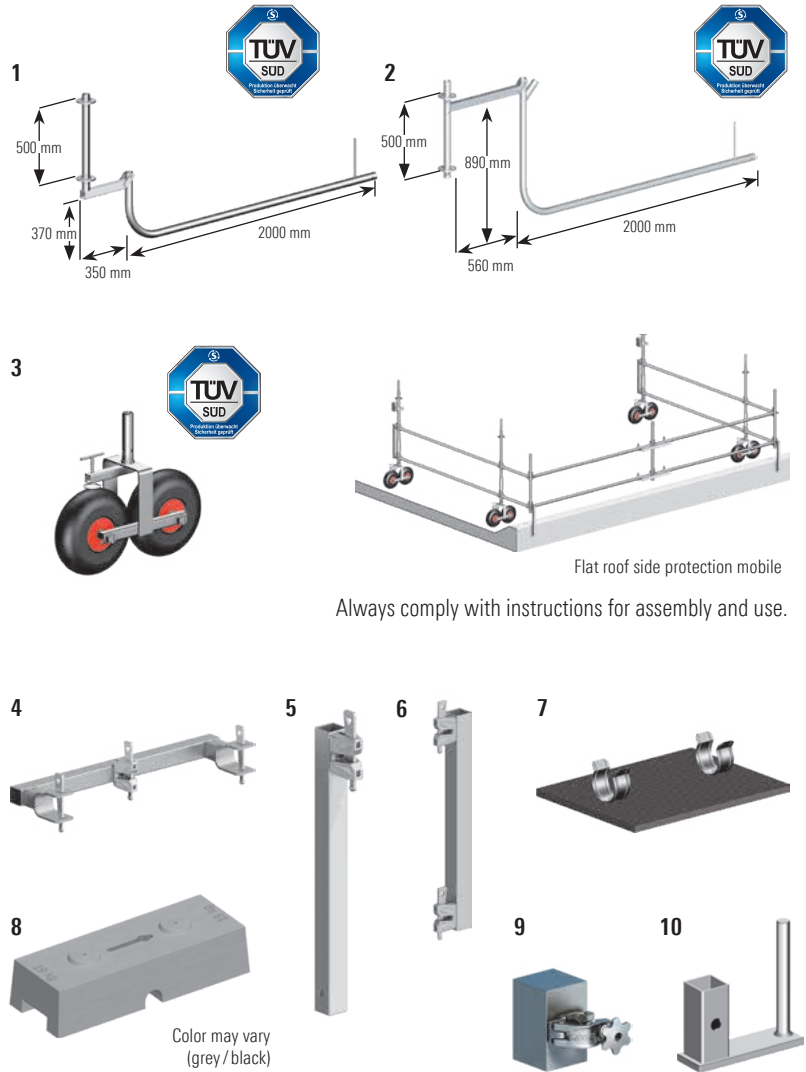

Flat roof side protection mobile

Always comply with instructions for assembly and use.

## Advance guardrail system


The **advance guardrail post T19 10**, the **telescoping assembly guardrail T19 1.57/2.07 m**, the **telescoping assembly guardrail T19 2.07/3.07 m 11**, and the **advance end guardrail 12** are used for temporary protection against falls during assembly of scaffolding parts on the uppermost, unsecured scaffolding level.

### Extension lengths

Article	L min.	L max.
Advance guardrail 1.57/2.07 m	1.57 m	2.90 m
Advance guardrail 2.07/3.07 m	2.07 m	3.70 m

### Stocking and transport

One tube pallet 125 and 6 steel decks resp. 3 Robust- or Xtra-N decks can be used together with the **end plates for transport box 14** as a practical transport box. This can be used for protectively stocking and transport of the advance guardrail.

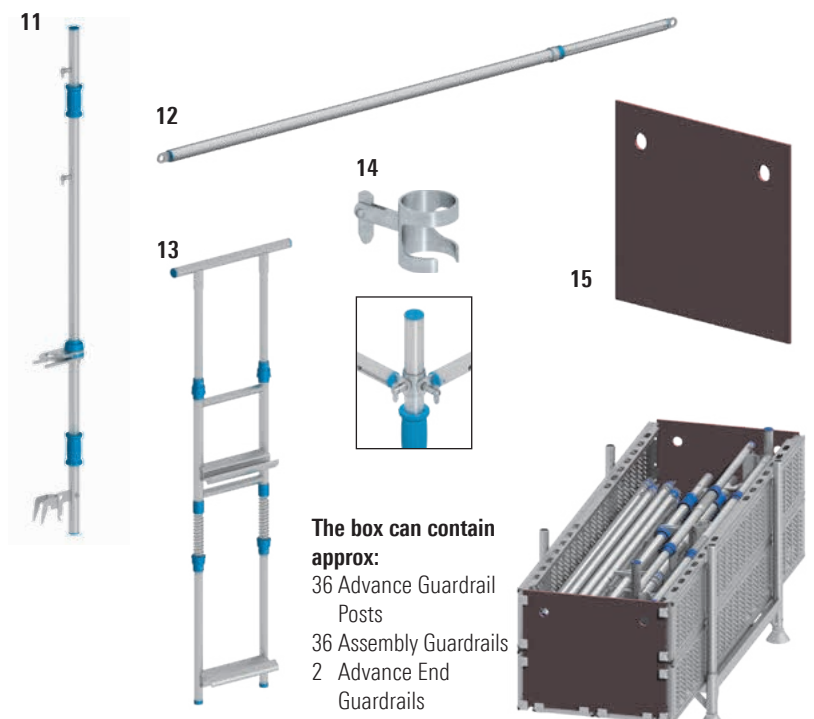

The box can contain approx:

- 36 Advance Guardrail Posts
- 36 Assembly Guardrails
- 2 Advance End Guardrails

Further information about the advance guardrail can be found in the product video:  
yt-advanceguardrail-en.layher.com



Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.		
1	<b>Flat roof guardrail post</b> steel, for low roof edges		2.40	13.70	20	<b>2666.010</b>	
2	<b>Flat roof guardrail post, offset</b> steel, for high roof edges		2.70	15.80	20	<b>2666.011</b>	
3	<b>Flat roof wheel set</b>	0.60 x 0.50		6.40	20	<b>2666.015</b>	
4	<b>Flat roof guardrail stiffener</b> steel		0.60	4.10	60	<b>2666.030</b>	
5	<b>Flat roof shift preventer</b> steel		0.50	1.90	200	<b>2666.020</b>	
6	<b>Standard lock</b> 0.50 m		0.58	4.00	100	<b>2603.000</b>	
7	<b>Support for flat roof guardrail</b>	0.30 x 0.23		0.60	400	<b>2666.050</b>	
8	<b>Flat roof ballast 19 kg</b>	0.69 x 0.25 x 0.16		19.00	50	<b>2666.060</b>	
9	<b>Ballast (10 kg)</b> from steel, hot-dip galvanized with half-coupler			10.00	100	<b>1249.000</b>	
10	<b>Flat roof toe board support</b>	0.04 x 0.13 x 0.13		0.70	300	<b>2666.070</b>	
11	<b>Advance guardrail post T19</b> aluminium, for two advance guardrails (0.50 m and 1.00 m height); rapic guardrail assembly with a tilting pin			6.00	50	<b>4031.003</b>	
12	<b>Assembly guardrail T19</b> 1.57 / 2.07 m, aluminium, telescopic		1.70	2.88	50	<b>4030.207</b>	
	2.07 / 3.07 m, aluminium, telescopic		2.30	3.73	50	<b>4030.307</b>	
13	<b>Advance end guardrail</b> aluminium, for securing the scaffolding end, for bay width of 0.73 m to 1.40 m	2.20 x 0.70		9.80	5	<b>4031.000</b>	
14	<b>Tilting pin adapter</b> for use of the advance guardrail at outer and inner corners			0.27	10	<b>4031.005</b>	
15	<b>End plate for transport box</b> plywood, easy fixation by the u-claws of the scaffolding decks	0.72 x 0.60		2.40	120	<b>5105.072</b>	



The advance guardrail can be used for the access bay or over several bays.

The instructions for assembly and use of the Allround Scaffolding System must be complied with.

Detail of assembly of the advance guardrail in the access bay



The advance end guardrail is used by placing the bottom U-section on the lower guardrail. The upper U-section must be pulled down to fit into place under the deck ledger. By letting go the advance end guardrail will be secured.



## Safety gear

According to German DGUV 38 regulations, equipment to prevent falls by personnel must be provided for work areas and walkways where the height of the fall is more than 2.00 m.

The **PPE safety harness AX 60 C** has impressive features:

- ▶ Comfortable, padded and ergonomic back support
- ▶ Convenient tool holders and click-locks for easy fastening
- ▶ High operational dependability and absolute freedom from maintenance, plus very simple fastening
- ▶ Operating errors are not possible, as the equipment operates in any position
- ▶ Excellent running, even under gruelling working conditions
- ▶ Enormous distribution of forces in the event of a fall

Before use, visual checks must be performed regularly to ensure correct working order. In accordance with German BGR 198 regulations, all personal safety equipment must be inspected at least once a year by an expert. The maximum permissible period of use for the equipment must not be exceeded.

1



2



3




## Railing clamp

### Railing clamp

According to German regulations DGUV 38 relating to construction work, a fall protection system must be provided for work areas and walkways on roofs and intermediate levels where the height of the fall is more than 2.00 m. The Layher railing clamp meets these requirements for securing of concrete floors and fascias of 16 – 33 cm height and of flat roofs.

The back guard must be made in accordance with applicable regulations from tube / coupler, modular or frame scaffolding. The bay widths can be freely selected, max. 3.07 m long.

4

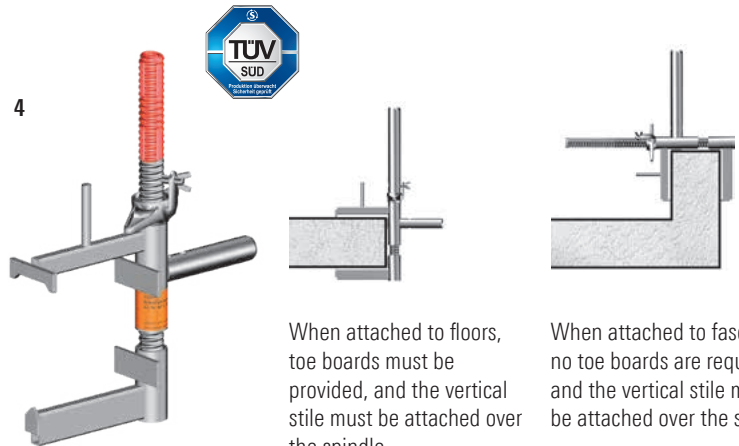

When attached to floors, toe boards must be provided, and the vertical stile must be attached over the spindle.


When attached to fascias, no toe boards are required, and the vertical stile must be attached over the spigot.

Pos.	Description	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.	
1	<b>PPE safety harness AX 60 C</b> with extension 0.50 m, conforms to EN 361		1.80	5	<b>5969.160</b>	🕒
2	<b>PPE flex safety rope</b> 2.00 m, with fall arrester and snap hook FS 90, as per EN 354 / EN 355, self-shortening to reduce tripping hazards	2.00	1.10	20	<b>5969.501</b>	🏢
3	<b>PPE scaffolding construction set</b> Backpack, safety harness and safety rope 2.00 m (use exclusively for scaffolding construction)		3.50	50	<b>5969.170</b>	🏢
4	<b>Railing clamp</b>	0.58	7.00	40	<b>4015.100</b>	🏢

Example for use of the railing clamp on fascia:



Example for use of the railing clamp on floor slab:

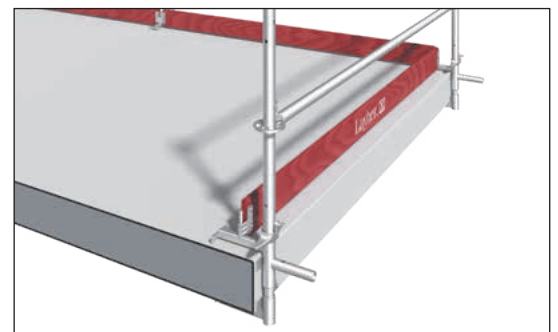


## Parts for mobile scaffolds

### Castors

The mobile solution for birdcage, bridge or suspended scaffolding is often the best alternative in terms of technical suitability, scheduling and price. In this field too, the choice, the delivery capability and not least the experience of the manufacturer point to Layher. If scaffolding is made mobile using castors, DIN 4420-3 applies. For these rolling towers, verification of structural strength is required.

Robust castors with twin brake (it brakes wheel and slewing ring) for various loads, offer a safer mobility of the scaffolding – without high effort.

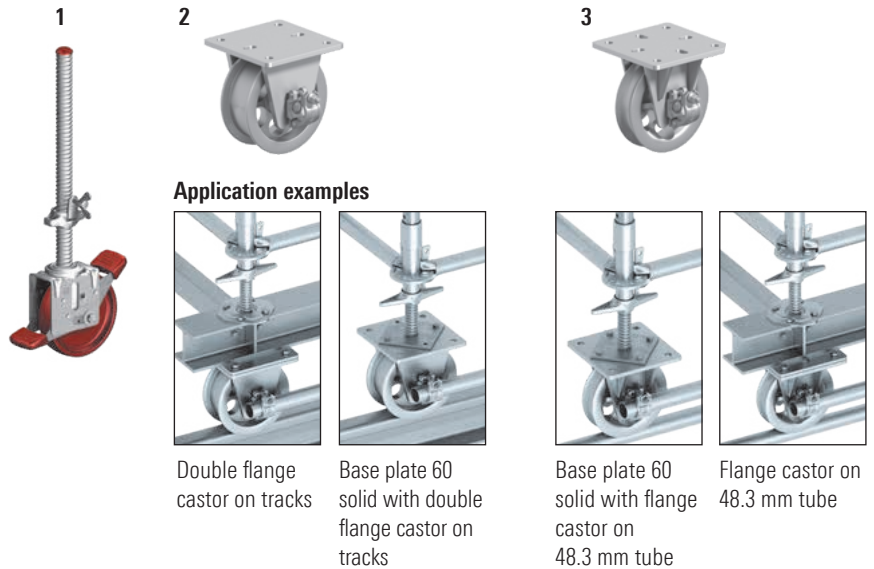

## Scaffolding pallets

### Tube pallets


in square shape (85) 5 or in rectangular shape (125) 4. The pallets are open on all sides. Tubes, standards, guardrails, diagonal braces, toe boards are transported and stored with this pallet. The empty pallets, stored permanently in the base frame using pallet posts, can be transported and stored in a space-saving way.

### Tube pallet 125 4

Following can be transported: 80 standards or 99 toe boards or 155 ledgers (pay attention to the perm. load of 1,500 kg) or 28 steel decks 0.32 m.

### Modular pallet and skeleton box 10/11

The palette or the skeleton box can be stacked with Euro pallets. Crane eyelets at top; an opening allows stacked material to be removed even if several pallets are stacked one above the other. The integrated timber base plate is 30 mm thick and it's nailed onto 50 x 50 mm square timbers.

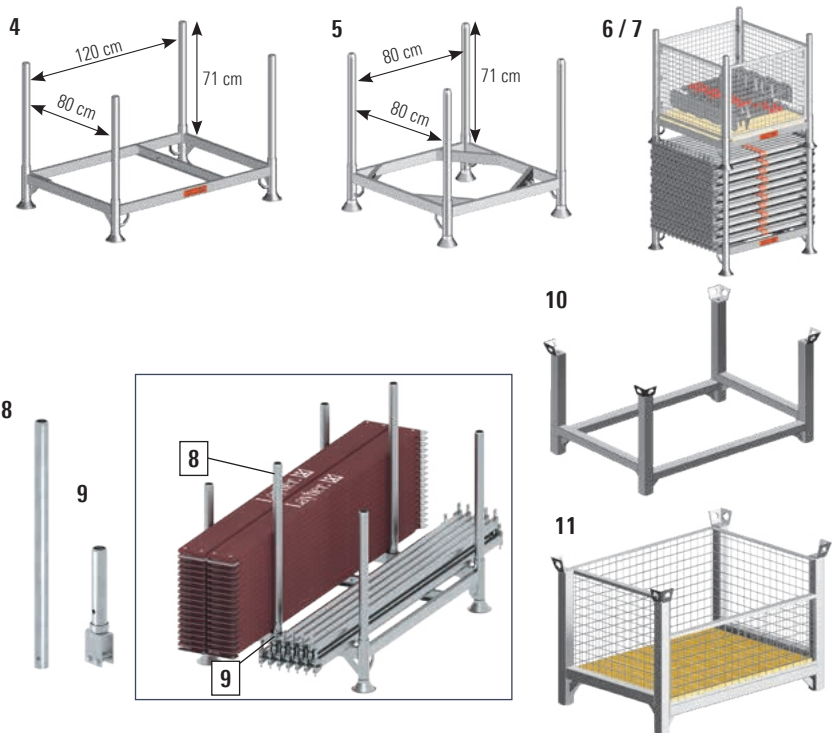

More pallets you'll find in the catalogue System-free Accessories.












## Tools

The three-piece **scaffolding identification pad 14** with carbon copy developed to tag work scaffolding. The right part is the inspection record for your files. Your client gets the carbon. On the back side of the carbon, important application notes are listed.

The **scabbling pick, 600 g reinforced 15** on the hammer head ensures a consistently safe use. The additional hardened inner tube provides a standard breaking strength. In addition, the reinforced scabbling pick has a patented head-stem-connection, which also forgives failures. The orange handle provides good handling, good cushioning and low-fatigue working.

Identification and prohibition signs for work scaffolding as per DIN EN 12811-1. Suitable **see-through pocket T17 with STOP 16** made of transparent plastic for weather protection.



Pos.	Description	WS [mm]	Dimensions L/H x W [m]	Weight approx. [kg]	PU [pcs.]	Ref. No.
1	<b>Castor 1000</b> plastic wheel, d=200 mm. With base plate, adjustment range 0.30 – 0.60 m, spindle nut with lock, with twin brake lever and load centering when braked. Wheel and slewing ring can be locked. Permissible load 10 kN (braked and unbraked)		d=0.20	6.30	70	1260.201
2	<b>Double flange castor T17</b> 75 mm, secured by top plate, hole pattern 170 x 170 mm, d=18 mm, external d=238 mm, internal d=200 mm, without brake. Permissible load 31 kN		d=0.238	21.40	40	5216.076 
3	<b>Flange castor</b> for 48.3 mm tube, secured by top plate, outer hole pattern 170 x 170 mm, d=18 mm, inner hole pattern 126 x 126 x 13 mm (slot hole 13 x 28 mm) without brake. Permissible load 31 kN		d=0.23	16.80	40	5221.048 
4	<b>Tube pallet 125</b> steel, hot-dip galvanized, length of pallet posts: 0.86 m, load 1,500 kg, dimensions 1.37 x 0.97 m		1.37 x 0.97	32.00	10	5105.125
5	<b>Tube pallet 85</b> steel, hot-dip galvanized, length of pallet posts: 0.86 m, load 1,500 kg, dimensions 0.97 x 0.97 m		0.97 x 0.97	30.80	10	5105.085
6	<b>Timber base plate</b>		0.88 x 0.88	4.10	50	5104.088 
7	<b>Mesh box insert</b> steel, hot-dip galvanized, load 1,500 kg			22.00	10	5104.086 
8	<b>Plug tubes 860</b>  for tube pallet 125 and 85		0.86	2.60	50	6494.751 
9	<b>Spigot for tube pallet</b>  to create partitions with the plug tube 860 for stocking of different components		0.31 x 0.06	1.50	200	5105.000 
10	<b>Modular pallet</b> steel, hot-dip galvanized, internal dimensions 1.08 x 0.68 x 0.61 m, load 2,000 kg, perm. onload 6,000 kg, stackable with Euro pallets		1.20 x 0.80	45.00	5	7042.004
11	<b>Modular skeleton box with timber base plate</b> steel, hot-dip galvanized, internal dimensions 1.08 x 0.68 x 0.61 m, load 2,000 kg, perm. onload 6,000 kg, stackable with Euro pallets		1.20 x 0.80	85.80		5113.002
12	<b>Ratchet wrench</b> for 19 and 22 mm widths across flats, with reversing lever for right-hand and left-hand operation, mandrel for ring bolts	19 & 22	0.32	0.60	25	4747.000
13	<b>Magnetic spirit level</b>			0.40	5	4006.666
14	<b>Scaffolding identification pad</b> pad with 50 + 50 pieces (Original + Carbon) with centre perforation and foldover as carbon-block		DIN A4	0.50	640	6344.500 
15	<b>Scabbling pick, 600 g reinforced</b>		0.32	0.80	5	4421.051 
16	<b>See-through pocket with STOP</b> See-through pocket for inspection and approval record		0.30 x 0.17	0.35	10 	6344.011



<b>A</b>				
Access ladder, T19	25, 27			
Adapter for ledger connection	61			
Adapter plate	65			
Adjustable foot	63			
Adjustment plate for base plate	11			
Advance end guardrail	67			
Advance guardrail post T19	67			
AGS double end guardrail	15			
AGS eaves bracket	15			
AGS guardrail	15			
adapter	15			
Fixx	15			
standard LW	15			
support	15			
AGS interior standard	15			
AGS stair guardrail	15			
post	15			
AGS standard LW	15			
for roof edge protection	15			
Allround pressure support	55			
Allround rosette cover	33			
Allround wall connection unit	55			
Allround wall tie	33			
Aluminium pole ladder	41			
Aluminium section beam with wood	61			
Articulated TwixBeam spindle 60	57			
Assembly aid for system handrail	45			
Assembly guardrail T19	67			
<b>B</b>				
Ballast (10 kg)	67			
Base collar	13			
0.26 m	47			
Base piece for heavy-duty column	63			
Base plate	63			
60	11			
80	11			
110	11			
for heavy-duty column	63			
support	55			
Beam clamp	63			
Beam connector	61			
bolt	61			
Blind rivet 4.8 x 12, 100 pcs.	45			
Bolt				
20 x 113	53, 57			
20 x 66	49			
30 x 145	51			
M20 x 90	57			
Bracket brace	35			
Bridging system				
adapter for heavy-duty column	51			
chord	51			
diagonal anchoring	51			
diagonal rod	51			
post	51			
support beam	51			
support element	51			
support for double standard	51			
<b>C</b>				
Castor 1000	71			
Castor adapter	61			
Clamping nut	51			
Clamping plate				
70 to 210 mm	53			
190 to 330 mm	53			
Compensation element	63			
Corner deck, adjustable	25			
Countersunk bolt M8 x 30	45			
Cover deck	65			
Cover plate 320				
steel, 0.32 m	29			
with hooks, 0.32 m	29			
Cross head jack 45	11			
<b>D</b>				
Diagonal brace LW, steel,				
0.50 m bay height	21			
1.00 m bay height	21			
1.50 m bay height	21			
2.00 m bay height	21			
Diagonal brace, aluminium,				
2.00 m bay height	21			
Door lockable	39			
Double coupler	33			
Double flange castor T17	71			
<b>E</b>				
End caps for system handrail tube,				
plastic, 10 pcs.	45			
End plate for transport box	67			
<b>F</b>				
Fastening for crane transport	61			
Flange castor	71			
Flat roof				
ballast 19 kg	67			
guardrail post	67			
offset	67			
guardrail stiffener	67			
shift preventer	67			
toe board support	67			
wheel set	67			
FlexBeam Alu U-beam	53			
FlexBeam anchor plate	53			
tube	53			
FlexBeam cross-connector	55			
FlexBeam crosspiece	55			
FlexBeam end bracket adapter	53			
FlexBeam guardrail adapter	55			
FlexBeam head jack 60, swivelling	53			
FlexBeam lift-off preventer	53			
bolt	53			
lock	53			
FlexBeam rosette adapter	53			
FlexBeam spigot	53			
FlexBeam standard adapter				
female	53			
male	53			
FlexBeam standard connector	53			
FlexBeam suspension shoe	53			
FlexBeam tie rod adapter	53			
FlexBeam timber beam support	53			
FW chord	49			
FW diagonal rod	49			
FW double guardrail	49			
FW endfitting	49			
FW guardrail adapter	49			
FW nut, 30 x 15	49			
FW post	49			
extended	49			
single-side-connection	49			
<b>G</b>				
Guardrail	19			
Guardrail adapter	15			
Guardrail fixing device	43			
Guardrail for modular stairway	47			
Guardrail for stairs				
500 T12	43			
750 with child protection	43			
Guardrail standard	41			
Guardrail T12 with child protection	43			
<b>H</b>				
Half coupler				
with hanger for door	39			
with plate	65			
with toe board pin	31			
Head jack	63			
45	11			
60	11			
for heavy-duty column	63			
Head part for heavy-duty column	63			
Head plate	63			
Hexagon head bolt M12 x 35	51			
Hinged pin	13			
Hollow wall bracket adapter	65			
<b>I</b>				
Initial stairway guardrail	39			
Initial standard LW	13			
Intermediate jack	61			
Internal guardrail holder	15			
Internal stairway guardrail T12	39			
<b>J</b>				
Joint for system handrail, 10 pcs.	45			
<b>L</b>				
Landing cover	45			
with nose	45			
LayPLAN				
CAD	9			
CLASSIC	9			
TO RSTAB	9			

Lift-off preventer with bolt	47	Profil	63	Stringer for modular stairway	47
Lift-off prevention clamp	41	Protect holder	51	Support for flat roof guardrail	67
Loading and stacking securing profile	61	Protection net	37	Swing door	41
Locking nut	51			Swivel coupler	33
Locking pin	13	<b>Q</b>		Swivelling base plate 60	11
for steel plank	29	Quick strap fastener	37	Swivelling head jack 45	11
Lowering wedge, 1000 kN	63			System handrail holder	45
				System handrail tube, aluminium, d=42.3 mm, 6.00 m	45
<b>M</b>		<b>R</b>		<b>T</b>	
Magnetic spirit level	71	Railing clamp	69	Telescopic AGS guardrail	15
Mesh box insert	71	Rapid double coupler	33	Telescoping U-system deck	29
Modular pallet	71	Rapid swivel coupler	33	Tilting pin adapter	67
Modular skeleton box with timber base plate	71	Ratchet wrench	71	Timber base plate	71
		Ring screw	33	Tube pallet	
<b>O</b>		Riser	45	85	71
O-access deck	27	Rosette	13	125	71
T9	27	with thread	11	Twin wedge coupler	63
1.00 m long	27			TwixBeam	
O-board bearer	31	<b>S</b>		aluminium	57
O-bridging ledger LW	19	Scabbling pick, 600 g reinforced	71	beam connector	57
O-comfort stairway, aluminium, stair class B		Scaffolding identification pad	71	H-20 beam clamp	59
acc. to EN 12811-1	39	Scaffolding plank	11	for aluminium insertion beams	59
O-console bracket	35	Scaffolding tube	17	insertion beam	57
O-corner deck	27	Securing nut M8	45	spindle and standard adapter	59
O-cover ledger 110 LW	43	Securing pin, d=4 mm	49, 51, 53, 57	Stopper	59
O-lattice beam LW	47	Securing screw	29		
O-ledger	17	Shoring frame pallet	61	<b>U</b>	
with wedge head and U-fork	39	Shoring frame TG 60	61	U-access deck	25
O-ledger LW	17	Shoring spacer with spigot	61	0.64 m wide	25
horizontal-diagonal, steel	20	Shoring spigot	61	U-alu deck, perforated, 0.32 m wide	23
Open ended wrench WS 36	51	Shoring TG 60 frame set	61	U-aluminium access deck, 0.61 m wide	25
O-platform stairway, aluminium, stair class A		Single open-end wrench	63	1.00 m wide	25
acc. to EN 12811-1	39	Spacer	57	U-board bearer	31
O-robust access deck T9, 0.61 m wide	27	Special bolt M12 x 60	13	U-bridging ledger	19
O-robust deck T9, 0.61 m wide,	27	Spigot		U-comfort stairway, aluminium, stair class B	
O-side part	41	aluminium	13	acc. to EN 12811-1	39
O-stairway stringer		for O-lattice beam	47	U-console bracket	35
200 LW	41	for tube pallet	71	LW	35
500 LW	43	for U-section	47	U-console corner deck	25
750 LW	43	steel	13	U-corner deck	25
O-stalu deck T21	27	Spindle attachment	11	for circular scaffolding 30°	25
O-starting stairway, aluminium, stair class A		Spindle strut	57	U-cover ledger	
acc. to EN 12811-1	39	Spindle support	61	80 LW	43
O-steel deck LW, 0.32 m wide	27	Spring clip	41	110 LW	29
O-steel deck T9,		Spring washer A 8.4 x 18 mm	45	U-deck	
0.19 m wide	27	Stair foot section	41	110	29
0.32 m wide	27	Stair guardrail post	39	for equalisation bay	25
O-steel toe board T18	31	Stair middle section	41	U-extension bracket	35
O-toe board,		Stairway guardrail	39	U-interchangeable ledger LW	19
aluminium	31	adapter	39	reinforced	19
wood	31	steel galvanized	39	U-lattice beam	47
		Standard	13	LW	47
<b>P</b>		Standard connection	57	U-ledger bracket with 1 wedge head	15, 35
Plastic wall insert	33	Standard lock	13, 67	U-ledger LW	31
Plug tubes 860	71	Standard LW	13, 15	T14	17
PPE flex safety rope	69	Steel plank	29		
PPE safety harness AX 60 C	69	Steel pole ladder	41		
PPE scaffolding construction set	69	Step cover	45		

## Index

U-ledger	17
for lattice beam	47
reinforced	19
reinforced LW T14	19
steel deck—O-ledger	19
steel deck—O-ledger	19
steel deck—steel deck	19
steel deck—steel deck	19
with bearer	65
U-Lift-off preventer	
T8	19
T9	19
with toe board pin	15
Universal U-Lift-off preventer	19
U-platform stairway, aluminium, stair class A	
acc. to EN 12811-1	39
U-robust access deck, 0.61 m wide,	25
hatch offset	25
U-robust deck T9, 0.61 m wide	25
U-side part	41
U-stair	65
U-stair head section	41
U-stairway stringer	
200	41
500 LW	43
750 LW	43
U-stalu deck 50	23
U-stalu deck T21, 0.61 m wide	23
U-stalu deck T9,	
0.19 m wide	23
0.32 m wide	23
U-starting stairway, aluminium, stair class A	
acc. to EN 12811-1	39
U-steel deck	
45°	25
0.19 m wide	23
U-steel deck LW, 0.32 m wide	23
U-steel deck T4, 0.32 m wide	23
U-steel toe board T18	31
U-toe board	
aluminium	31
wood	31
U-transition deck 154 with claws	43
U-walkway beam LW	37
U-Xtra-N deck	
0.32 m wide	23
0.61 m wide	23
U-Xtra-N hatch-type access deck 0.61 m wide,	

## W

Wall shoe for TwixBeam	
aluminium beam	59
aluminium insertion beam	59
Wall tie	33
Wedge spindle swivel coupler	11
Wedge-head coupler	33, 51







Layher is your dependable partner with more than 75 years of experience. "Made by Layher" always means "Made in Germany" too – and that goes for the entire product range. Superb quality – and all from one source.

Proximity to the customer is a central factor behind Layher's success – geographically speaking too. Wherever our customers need us, we will be there – with our advice, assistance and solutions.

-  **SpeedyScaf**
-  **Allround Scaffolding**
-  **System-free Accessories**
-  **Protective Systems**
-  **Shoring**
-  **Event Systems**
-  **Rolling Towers**
-  **Ladders**
-  **Software**



Headquarters in Eibensbach



Plant 2 in Gueglingen

**Layher**   
 More Possibilities. The Scaffolding System.

**Wilhelm Layher GmbH & Co KG**  
 Scaffolding Grandstands Ladders  
 Ochsenbacher Strasse 56  
 74363 Gueglingen-Eibensbach  
 Germany

Post Box 40  
 74361 Gueglingen-Eibensbach  
 Germany  
 Telephone +49 (0) 71 35 70-0  
 Telefax +49 (0) 71 35 70-2 65  
 E-mail [export@layher.com](mailto:export@layher.com)  
[www.layher.com](http://www.layher.com)

